

2 x connectors for profile cable

Periphery connection

- via connecting wires
- M8 cable sockets
- M12 cable sockets



(Figure similar)



Figure	Type	Inputs Safety, SIL 3, Cat. 4	Inputs digital	Outputs digital	Safety signal inputs	Input voltage (sensor supply) ⁽¹⁾	Output voltage (actuator supply) ⁽²⁾	Connection ⁽³⁾	ASi address ⁽⁴⁾	Special function	Art. no.
	IP67, depth 19 mm, Safety	1 x 2-channels	–	1 x electronic	floating contacts	out of ASi	out of ASi	2 x round cables/ connecting wires	1 single slave	–	BWU3249
	IP67, depth 19 mm, Safety	1 x 2-channels	–	–	floating contacts	out of ASi	–	2 x round cables/ connecting wires	1 single slave	to connect cable pull switches to ASi	BWU3600
	IP67, depth 19 mm, Safety	1 x 2-channels	–	2 x electronic	OSSDs	out of AUX	out of AUX	1 x M12 cable socket, straight, 8 poles + 1 x M12 cable socket, straight, 5 poles	1 single slave	to connect Leuze MLC530SPG (operation mode 5) to ASi	BWU3718
	IP67, depth 35 mm, Safety	1 x 2 channels	–	1 x electronic	floating contacts	out of ASi	out of AUX	1 x round cable/ connecting wires	1 single slave	–	BWU3425
	IP67, depth 35 mm, Safety	1 x 2 channels	–	1 x electronic	floating contacts	out of ASi	out of AUX	1 x M12 cable socket, straight, 8 poles	1 single slave	–	BWU3750
		IP67, depth 19 mm, Safety	1 x 2-channels	–	2 x electronic	OSSDs	out of AUX	out of AUX	1 x M12 cable socket, straight, 8 poles	1 single slave	to connect Leuze MLD530-RT3M (operation mode 5) to ASi
IP67, depth 19 mm Safety		1 x 2 channels	1	1 x electronic	OSSDs	out of AUX	out of AUX	1 x M12 cable socket, straight, 8 poles	1 single slave	to connect Pilz PSENSlock, PSENcode to ASi	BWU3721
IP67, depth 19 mm Safety		1 x 2 channels	1	1 x electronic	OSSDs	out of AUX	out of AUX	1 x M12 cable socket, straight, 8 poles	1 single slave	to connect Pilz PSENSlock, PSENcode to ASi	BWU3488
IP67, depth 19 mm Safety		1 x 2 channels	1	1 x electronic	OSSDs	out of AUX	out of AUX	1 x M12 cable socket, straight, 8 poles	1 single slave	to connect Schmersal AZM400 / CSS 180 / CSS 30S / RSS 16 to ASi	BWU3565
IP67, depth 19 mm Safety		1 x 2 channels	1	1 x electronic	OSSDs	out of AUX	out of AUX	1 x M12 cable socket, straight, 8 poles	1 single slave	to connect Schmersal AZM200 / AZM201 / AZM300 / MZM100 to ASi	BWU3635
IP67, depth 19 mm, Safety		1 x 2-channels	–	1 x electronic	OSSDs	out of AUX	out of AUX	1 x M12 cable socket, angled, 5 poles	1 single slave	–	BW3299
IP67, depth 19 mm, Safety		1 x 2-channels	–	1 x electronic	OSSDs	out of AUX	out of AUX	1 x M12 cable socket, straight, 5 poles	1 single slave	–	BWU3627
IP67, depth 19 mm Safety		1 x 2 channels	–	1 x electronic	OSSDs	out of AUX	out of AUX	1 x M12 cable socket, straight, 5 poles	1 single slave	to connect Euchner MGB / Sick STR1-SASMOAC5 to ASi	BWU3376

Figure	Type	Inputs Safety, SIL 3, Cat. 4	Inputs digital	Outputs digital	Safety signal inputs	Input voltage (sensor supply) ⁽¹⁾	Output voltage (actuator supply) ⁽²⁾	Connection ⁽³⁾	ASi address ⁽⁴⁾	Special function	Art. no.
	IP67, depth 19 mm, Safety	1 x 2-channels	–	1 x electronic	floating contacts	out of ASi	out of ASi	1 x round cable/ connecting wires	1 single slave	–	BWU3599
	IP67, depth 19 mm, Safety	1 x 2-channels	–	1 x electronic	floating contacts	out of ASi	out of ASi	1 x round cable/ connecting wires	1 single slave	–	BWU3248
	IP67, depth 19 mm, Safety	1 x 2-channels	–	–	floating contacts	out of ASi	–	1 x M8 cable socket, straight, 4 poles	1 single slave	to connect Sick RE13-SA84 / RE13-SAC / RE23-SAC / RE23-SA84 to ASi	BWU3553
	IP67, depth 19 mm, Safety	1 x 2-channels	–	–	floating contacts	out of ASi	–	1 x M12 cable socket, angled, 5 poles	1 single slave	–	BWU3413
	IP67, depth 19 mm, Safety	1 x 2-channels	–	–	floating contacts	out of ASi	–	1 x M12 cable socket, straight, 5 poles	1 single slave	–	BWU3626
	IP67, depth 19 mm, Safety	1 x 2-channels	–	–	floating contacts	out of ASi	–	1 x round cable/ connecting wires	1 single slave	–	BWU3373

- (1) **Input voltage (sensor supply):** inputs are supplied by ASi or by AUX (auxiliary 24 V power). If supplied by ASi, inputs shall not be connected to earth or to external potential.
- (2) **Output voltage (actuator supply):** outputs are supplied by ASi or by AUX (auxiliary 24 V power). If supplied by ASi, outputs shall not be connected to earth or to external potential
- (3) **Connection:** further connection options are available on request.

M12 cable socket, angled	M12 cable socket, straight	M8 cable socket, straight	round cable / connecting wires	Push in terminals
PUR line: oil resistant				

- (4) **ASi address:** 1 AB Slave (max. 62 AB Slaves/ASi network), 2 AB Slaves (max. 31 modules with 2 AB Slaves), Single Slaves (max. 31 Single Slaves/ASi network), mixed use allowed.
 For modules with two slaves the second slave is turned off as long as the first slave is addressed to address "0".
 Upon request, slaves are available with specific ASi Slave profiles.

Article No.	BWU3750	BWU3425	BWU3249	BWU3248	BWU3599	BWU3600
General data						
Device type	safe input					
Connection						
ASI/AUX connection	profile cable and piercing					
Periphery connection	1 x M12 cable socket, straight, 8 poles	1 x round cable/ connecting wires	2 x round cables/ connecting wires	1 x round cable/ connecting wires		2 x round cables/ connecting wires
Round cable	1 m			10 m		
	max. allowed tensile strain 10 N					
ASI						
Profile	S-7.B.0, ID1=F					
Address	1 single slave					
Required Master profile	≥M3					
As of ASi specification	2.1					
Operating voltage	30 V (21,6 ... 31.6 V)					
Max. current consumption	100 mA					
Max. current consumption without sensor/ actuator supply	40 mA					
AUX						
Operating voltage	24 V (20 ... 30 V _{DC}) (PELV)	-				
Max. current consumption	max. 1 A	-				
Input						
Number	1 x 2-channels safe input					
Safety signal	floating contacts					
Switching current	35 mA (T = 40 μs), continuously 5 mA at 24 V					
Power supply	out of ASi					
Sensor supply	short-circuit and overload protected according to EN 61131-2					
Power supply of attached sensors	-					
Switching threshold	2 mA, R ≤ 150 Ω					
Output						
Number	1			-		
Power supply	out of AUX		out of ASi		-	
Output	short-circuit and overload protected according to EN 61131-2					
Max. output current	1 A		25 mA		-	
Display						
LED ASI/FLT (red/green)	green: ASi voltage on, slave online red: ASi voltage on, but slave offline yellow/red flashing: address 0 red/green flashing: peripheral fault ⁽¹⁾ off: no ASi voltage					
LEDs S1, S2 (yellow)	state of inputs S1, S2					
LED O1 (yellow)	state of output O1					-

Article No.	BWU3750	BWU3425	BWU3249	BWU3248	BWU3599	BWU3600
Environment						
Applied standards	EN ISO 13849-1 PLe cat4 EN ISO 13849-2 EN 62061 SIL3 EN 62026-2 EN 61000-6-2 EN 61000-6-4 EN 60529					
Operating altitude	max. 2000 m					
Ambient temperature	-30 °C ... +60 °C ⁽²⁾ ⁽³⁾ (no condensation permitted)					
Storage temperature	-25 °C ... +85 °C					
Housing	plastic, for screw mounting, suitable for cable ducts (installation depth ≥35 mm)		plastic, for screw mounting, suitable for cable ducts (installation depth ≥19 mm)			
Pollution Degree	2					
Protection category	IP67 ⁽⁴⁾					
Tolerable loading referring to humidity	according to EN 61131-2					
Maximum tolerable shock and vibration stress	≤15g, T≤11 ms 10 ... 55 Hz, 0,5 mm amplitude					
Insulation voltage	≥500 V					
Weight	100 g					
Dimensions (W / H / D) in mm	60 / 45 / 35		60 / 45 / 19			

(1) see table "Peripheral fault indication"

(2) temperature range up to -30°C from Ident.No. ≥16305 (BWU3249); Ident.No. ≥16306 (BWU3248).

(3) Down to -25 °C with flexibly mounted cable, -30 °C only with fixed mounted cable.

(4) Protection category IP67 can only be achieved, if also the cable connector fulfills IP67.

Article No.	BWU3373	BWU3413	BWU3626	BWU3553
General data				
Device type	safe input			
Connection				
ASi/AUX connection	profile cable and piercing			
Periphery connection	1 x round cable/ connecting wires	1 x M12 cable socket, angled, 5 poles	1 x M12 cable socket, straight, 5 poles	1 x M8 cable socket, straight, 4 poles
Round cable	0,3 m	1 m,		0,2 m
	max. allowed tensile strain 10 N			
ASi				
Profile	S-0.B.F, ID1=F			
Address	1 single slave			
Required Master profile	≥M3			
As of ASi specification	2.1			
Operating voltage	30 V (21,6 ... 31.6 V)			
Max. current consumption	100 mA			
Max. current consumption without sensor/ actuator supply	40 mA			

Article No.	BWU3373	BWU3413	BWU3626	BWU3553
Input				
Number	1 x 2-channels safe input			
Safety signal	floating contacts			
Switching current	35 mA (T = 40 µs), continuously 5 mA at 24 V			
Power supply	out of ASi			
Sensor supply	short-circuit and overload protected according to EN 61131-2			
Power supply of attached sensors	-			
Switching threshold	2 mA, R ≤ 150 Ω			
Display				
LED ASI/FLT (red/green)	green: ASi voltage on, slave online red: ASi voltage on, but slave offline yellow/red flashing: address 0 red/green flashing: peripheral fault ⁽¹⁾ off: no ASi voltage			
LEDs S1, S2 (yellow)	state of inputs S1, S2			
Environment				
Applied standards	EN ISO 13849-1 PLe cat4 EN ISO 13849-2 EN 62061 SIL3 EN 62026-2 EN 61000-6-2 EN 61000-6-4 EN 60529			
Operating altitude	max. 2000 m			
Ambient temperature	-30 °C ... +60 °C ⁽²⁾ (no condensation permitted)			
Storage temperature	-25 °C ... +85 °C			
Housing	plastic, for screw mounting, suitable for cable ducts (installation depth ≥19 mm)			
Pollution Degree	2			
Protection category	IP67 ⁽³⁾			
Tolerable loading referring to humidity	according to EN 61131-2			
Maximum tolerable shock and vibration stress	≤15g, T≤11 ms 10 ... 55 Hz, 0,5 mm amplitude			
Insulation voltage	≥500 V			
Weight	100 g			
Dimensions (W / H / D) in mm	60 / 45 / 19			

⁽¹⁾ see table "Peripheral fault indication"


⁽²⁾ Down to -25 °C with flexibly mounted cable, -30 °C only with fixed mounted cable.

⁽³⁾ Protection category IP67 can only be achieved, if also the cable connector fulfills IP67.

Article No.	BWU3718	BWU3719	BW3299	BWU3376	BWU3627
General data					
Device type	safe input				
Connection					
ASI/AUX connection	profile cable and piercing				
Periphery connection	1 x M12 cable socket, straight, 8 poles + 1 x M12 cable socket, straight, 5 poles	1 x M12 cable socket, straight, 8 poles	1 x M12 cable socket, angled, 5 poles	1 x M12 cable socket, straight, 5 poles	
Round cable	10 m	2 m	1 m	5 m	
max. allowed tensile strain 10 N					

Article No.	BWU3718	BWU3719	BW3299	BWU3376	BWU3627
ASi					
Profile	S-7.B.1, ID1=F				
Address	1 single slave				
Required Master profile	≥M3				
As of ASi specification	2.1				
Operating voltage	30 V (21,6 ... 31.6 V)				
Max. current consumption	60 mA				
Max. current consumption without sensor/ actuator supply	60 mA				
AUX					
Operating voltage	24 V (20 ... 30 V _{DC}) (PELV)				
Max. current consumption	max. 1 A ⁽¹⁾				
Input					
Number	1 x 2-channels safe input				
Safety signal	OSSDs				
Power supply	out of AUX				
Sensor supply	short-circuit and overload protected according to EN 61131-2				
Power supply of attached sensors	up to +50 °C	750 mA, $\sum(\text{In/Out})$ 1 A ⁽¹⁾			
	at +60 °C	750 mA, $\sum(\text{In/Out})$ 750 mA ⁽¹⁾			
	at +70 °C	500 mA, $\sum(\text{In/Out})$ 500 mA ⁽¹⁾			
Switching threshold safe input	V _{in} >11 V for High-Level, V _{in} <5 V for Low-Level, input current>2,5 mA at 15 V				
Switching threshold standard input	-				
OSSD test pulses	0 ... 50 Hz				
OSSD test pulse width	U _{aux} ≥21,5 V= 0 ... 1 ms test pulses possible U _{aux} ≥17 V= 0 ... 0,8 ms test pulses possible U _{aux} <17 V= 0 ... 0,6 ms				
Start delay	<22 ms				
Output					
Number	2		1		
Power supply	out of AUX				
Output	short-circuit and overload protected according to EN 61131-2				
Max. output current	up to +50 °C	750 mA, $\sum(\text{In/Out})$ 1 A ⁽¹⁾			
	at +60 °C	750 mA, $\sum(\text{In/Out})$ 750 mA ⁽¹⁾			
	at +70 °C	500 mA, $\sum(\text{In/Out})$ 500 mA ⁽¹⁾			
Display					
LED ASI/FLT (red/green)	green: ASi voltage on, slave online red: ASi voltage on, but slave offline yellow/red flashing: address 0 red/green flashing: peripheral fault ⁽²⁾ off: no ASi voltage				
LED AUX (green)	on: 24 V _{DC} AUX off: no 24 V _{DC} AUX				
LEDs S1, S2 (yellow)	state of inputs S1, S2				
LED I1 (yellow)	-				
LED O1, O2 (yellow)	state of outputs O1, O2		state of output O1		

Article No.	BWU3718	BWU3719	BW3299	BWU3376	BWU3627
Environment					
Applied standards	EN ISO 13849-1 PLe Kat4 EN ISO13 849-2 EN 62061 SIL 3 EN 62026-2 EN 61000-6-2 EN 61000-6-4 EN 60529				
Operating altitude	max. 2000 m				
Ambient temperature	-30 °C ... +60 °C (up to max. +70 °C) ⁽¹⁾⁽³⁾ (no condensation permitted)				
Storage temperature	-25 °C ... +85 °C				
Housing	plastic, for screw mounting, suitable for cable ducts (installation depth ≥19 mm)				
Pollution Degree	2				
Protection category	IP67 ⁽⁴⁾				
Tolerable loading referring to humidity	according to EN 61131-2				
Maximum tolerable shock and vibration stress	≤15g, T≤11 ms 10 ... 55 Hz, 0,5 mm amplitude				
Insulation voltage	≥500 V				
Weight	100 g				
Dimensions (W / H / D) in mm	60 / 45 / 19				

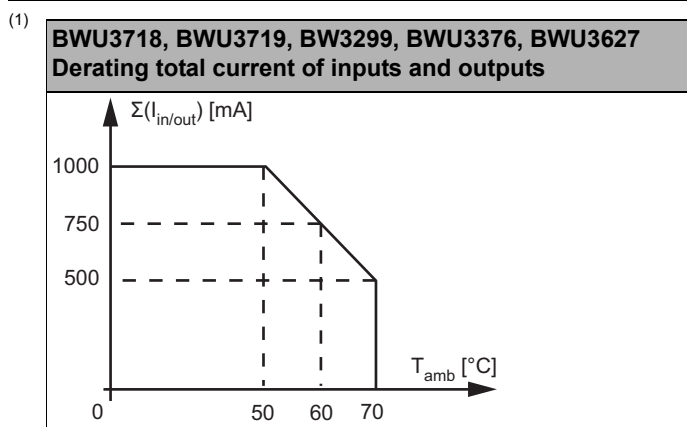

(2) see table "Peripheral fault indication"


(3) Down to -25 °C with flexibly mounted cable, -30 °C only with fixed mounted cable.

(4) Protection category IP67 can only be achieved, if also the cable connector fulfills IP67.

Article No.	BWU3721	BWU3488	BWU3565	BWU3635
General data				
Device type	safe input			
Connection				
ASi/AUX connection	profile cable and piercing			
Periphery connection	1 x M12 cable socket, straight, 8 poles			
Round cable	5 m	1 m		
	max. allowed tensile strain 10 N			

Article No.	BWU3721	BWU3488	BWU3565	BWU3635
ASi				
Profile	S-7.B.1, ID1=F			
Address	1 single slave			
Required Master profile	≥M3			
As of ASi specification	2.1			
Operating voltage	30 V (21,6 ... 31.6 V)			
Max. current consumption	60 mA			
Max. current consumption without sensor/ actuator supply	60 mA			
AUX				
Operating voltage	24 V (20 ... 30 V _{DC}) (PELV)			
Max. current consumption	max. 1 A ⁽¹⁾			
Input				
Number	1 x 2-channels safe input + 1 x standard input			
Safety signal	OSSDs			
Power supply	out of AUX			
Sensor supply	short-circuit and overload protected according to EN 61131-2			
Power supply of attached sensors	up to +50 °C	750 mA, $\Sigma(\text{In/Out})$ 1 A ⁽¹⁾		
	at +60 °C	750 mA, $\Sigma(\text{In/Out})$ 750 mA ⁽¹⁾		
	at +70 °C	500 mA, $\Sigma(\text{In/Out})$ 500 mA ⁽¹⁾		
Switching threshold safe input	$V_{in} > 11$ V for High-Level, input current > 2,5 mA at 15 V			
Switching threshold standard input	U < 5 V (low) U > 15 V (high) (data bit inverted)			
OSSD test pulses	0 ... 50 Hz			
OSSD test pulse width	$U_{aux} \geq 21,5$ V = 0 ... 1 ms test pulses possible $U_{aux} \geq 17$ V = 0 ... 0,8 ms test pulses possible $U_{aux} < 17$ V = 0 ... 0,6 ms			
Start delay	< 22 ms			
Output				
Number	1			
Power supply	out of AUX			
Output	short-circuit and overload protected according to EN 61131-2			
Max. output current	up to +50 °C	750 mA, $\Sigma(\text{In/Out})$ 1 A ⁽¹⁾		
	at +60 °C	750 mA, $\Sigma(\text{In/Out})$ 750 mA ⁽¹⁾		
	at +70 °C	500 mA, $\Sigma(\text{In/Out})$ 500 mA ⁽¹⁾		
Display				
LED ASI/FLT (red/green)	green: ASi voltage on, slave online red: ASi voltage on, but slave offline yellow/red flashing: address 0 red/green flashing: peripheral fault ⁽²⁾ off: no ASi voltage			
LED AUX (green)	on: 24 V _{DC} AUX off: no 24 V _{DC} AUX			
LEDs S1, S2 (yellow)	state of inputs S1, S2			
LED I1 (yellow)	state of input I1			
LED O1, O2 (yellow)	state of output O1			

Article No.	BWU3721	BWU3488	BWU3565	BWU3635
Environment				
Applied standards	EN ISO 13849-1 PLe Kat4 EN ISO13 849-2 EN 62061 SIL 3 EN 62026-2 EN 61000-6-2 EN 61000-6-4 EN 60529			
Operating altitude	max. 2000 m			
Ambient temperature	-30 °C ... +60 °C (up to max. +70 °C) ^{(1) (3)} (no condensation permitted)			
Storage temperature	-25 °C ... +85 °C			
Housing	plastic, for screw mounting, suitable for cable ducts (installation depth ≥19 mm)			
Pollution Degree	2			
Protection category	IP67 ⁽⁴⁾			
Tolerable loading referring to humidity	according to EN 61131-2			
Maximum tolerable shock and vibration stress	≤15g, T≤11 ms 10 ... 55 Hz, 0,5 mm amplitude			
Insulation voltage	≥500 V			
Weight	100 g			
Dimensions (W / H / D) in mm	60 / 45 / 19			

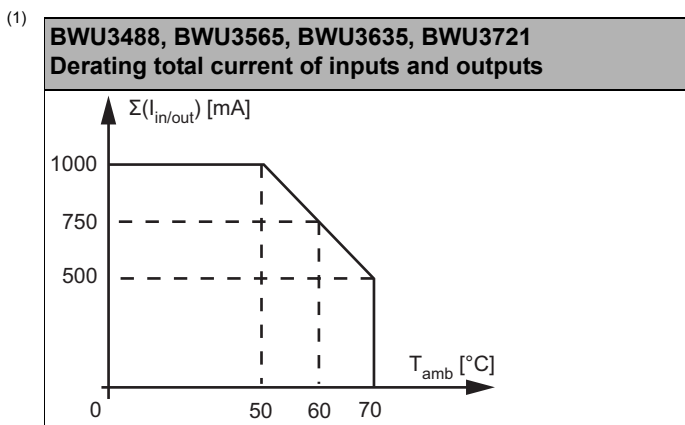

(2) see table "Peripheral fault indication"

(3) Down to -25 °C with flexibly mounted cable, -30 °C only with fixed mounted cable.

(4) Protection category IP67 can only be achieved, if also the cable connector fulfills IP67.

Article no.	Peripheral fault indication		
	Overload sensor supply	Output short circuited	AUX voltage missing
BWU3248	-	•	-
BWU3249	-	•	-
BW3299	-	•	•
BWU3373	-	-	-
BWU3376	-	•	•
BWU3413	-	-	-
BWU3425	-	•	•
BWU3488	-	•	•
BWU3553	-	-	-
BWU3565	-	•	•
BWU3599	-	•	-
BWU3600	-	-	-
BWU3626	-	-	-
BWU3627	-	•	•
BWU3635	-	•	•
BWU3718	•	•	•
BWU3719	•	•	•
BWU3721	-	•	•
BWU3750	-	•	•

UL-specifications (UL61010)	
BWU3248, BWU3249, BW3299, BWU3373, BWU3376, BWU3413, BWU3425, BWU3488, BWU3553, BWU3565, BWU3599, BWU3600, BWU3626, BWU3627, BWU3635, BWU3718, BWU3719, BWU3721, BWU3750	
External protection	An isolated source with a secondary open circuit voltage of $\leq 30 V_{DC}$ with a 3 A maximum over current protection. Over current protection is not required when a Class 2 source is employed.
In general	UL mark does not provide UL certification for any functional safety rating or aspects of the above devices.

Programming	ASi bit assignment			
	D3	D2	D1	D0
	safe input			
BWU3248, BWU3249, BWU3373, BWU3413, BWU3425, BWU3553, BWU3599, BWU3600, BWU3626, BWU3750	S2	S2	S1	S1
BW3299, BWU3376, BWU3488, BWU3565, BWU3627, BWU3635, BWU3718, BWU3719, BWU3721	OSSD2	OSSD2	OSSD1	OSSD1
	output			
BWU3248, BWU3249, BW3299, BWU3376, BWU3425, BWU3488, BWU3599, BWU3565, BWU3627, BWU3635, BWU3721, BWU3750	-	-	-	O1
BWU3718, BWU3719	-	-	O2	O1

Programming	ASi bit assignment			
	parameter bit			
	P3	P2	P1	P0
BWU3425, BWU3750	not used	not used	0= off / 1= on (peripheral fault if AUX voltage missing)	0= off / 1= on (Watchdog)
BWU3248, BWU3249, BW3299, BWU3376, BWU3599, BWU3600, BWU3627, BWU3718, BWU3719			not used	
BWU3488, BWU3565, BWU3635, BWU3721			I1 (inverted)	
BWU3373, BWU3413, BWU3553, BWU3626			not used	not used

Pin assignment

Signal name	Explanation
Sx +, Sx -	safe input x
Ix	digital input x
Ox	digital output x
24V _{ext out}	power supply, out of external voltage, positive pole (AUX, actuator supply)
0V _{ext out}	power supply, out of external voltage, negative pole (AUX, actuator supply)
24V _{out of ASi}	power supply, out of ASi, positive pole (sensor supply)
0V _{out of ASi}	power supply, out of ASi, negative pole (sensor supply)
ASi +, ASi -	connection to ASi bus
n.c. (not connected)	not connected

Connections: round cable/connecting wires

Article no.	connec.	BN	WH	BU	BK	PK	GY	RD	GN	YE	OG	
BWU3249	X1	S1+	S2+	S1-	S2-							
	X2	O1	n.c.	0 V out of ASi	n.c.							
BWU3600	X1	S1+	S1-									
	X2	S2+	S2-									
BWU3248 BWU3599	X1	S1+	S2+	S1-	S2-	0 V out of ASi	O1					

Connections: round cable/connecting wires												
Article no.	connec.	BN	WH	BU	BK	PK	GY	RD	GN	YE	OG	
BWU3425	X1	S1+	S2+	S1-	S2-	0 V _{ext} out	O1	-	-	-	-	
BWU3373	X1	S1+	S2+	S1-	S2-	-	-	-	-	-	-	

Connections: M8 cable sockets, straight, 4 poles						
Article no.	M8 connection	Pin1	Pin2	Pin3	Pin4	
BWU3553	X1	S1+	S1-	S2+	S2-	

Connections: M12 cable sockets, straight/angled, 5 poles							
Article no.	M12 connection	Pin1	Pin2	Pin3	Pin4	Pin5	
BW3299 BWU3376 BWU3627	X1	24 V _{ext} out	OSSD2	0 V _{ext} out	OSSD1	O1	
BWU3413 BWU3626	X1	S1+	S1-	S2+	S2-	n.c.	

Connections: M12 cable sockets, straight, 8 poles										
Article no.	connec.	Pin1 (WH)	Pin2 (BN)	Pin3 (GN)	Pin4 (YE)	Pin5 (GY)	Pin6 (PK)	Pin7 (BU)	Pin8 (RD)	
BWU3488 BWU3721	X1	24 V ₁ ext out ⁽¹⁾	24 V ₂ ext out ⁽¹⁾	OSSD 1	OSSD 2	11 (5)	24 V ₃ ext out ⁽¹⁾	0 V ext out	O1	
BWU3565	X1	24 V ₁ ext out	O1 (3)	0 V ₂ ext out ⁽⁴⁾	OSSD 1	11 (5)	0 V ₃ ext out ⁽⁴⁾	OSSD 2	O1 (3)	
BWU3635	X1	24 V ₁ ext out ⁽¹⁾	24 V ₂ ext out ⁽¹⁾	0 V ext out	OSSD 2	11 (5)	24 V ₃ ext out ⁽¹⁾	OSSD 1	O1	
BWU3719	X1	O1 (2)	0 V ext out	24 V ext out	O1 (2)	OSSD 2	OSSD 1	24 V ext out	O2	
BWU3750	X1	S1+	S1-	S2+	S2-	O1	0 V ext out	n.c.	n.c.	

- (1) Pin1/Pin2/Pin6 are internally bridged.
- (2) Pin1/Pin4 are internally bridged.
- (3) Pin2/Pin8 are internally bridged.
- (4) Pin3/Pin6 are internally bridged.
- (5) Data bit inverted.


Connections: M12 cable socket, straight, 8 poles + M12 cable socket, straight, 5 poles										
Article no.	connec.	Pin1 (WH)	Pin2 (BN)	Pin3 (GN)	Pin4 (YE)	Pin5 (GY)	Pin6 (PK)	Pin7 (BU)	Pin8 (RD)	
BWU3718	X1	O1 (1)	24 V ext out	O2	O1 (1)	OSSD 1	OSSD 2	0 V ext out	n.c.	
	X2	24 V ext out	n.c.	0 V ext out	n.c.	n.c.	-			

- (1) Pin1/Pin4 are internally bridged.

Line termination with sealing profile



max. IP54

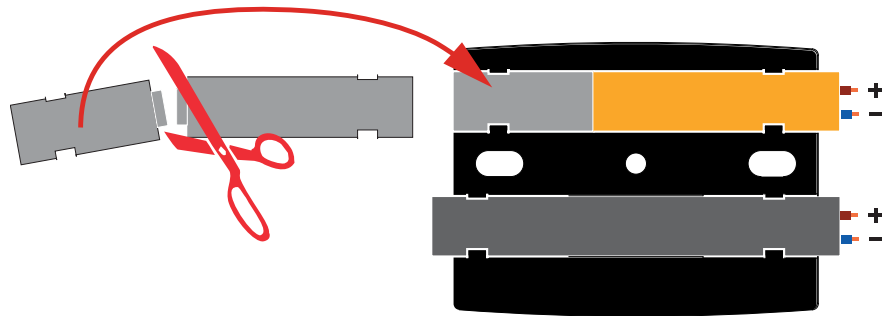

Accessories:

- Sealing profile IP67 (IDC plug), 60 mm (art. no. BW3282)
- ASi addressing cable with M12 connector, connecting cable for handheld ASi address programming devices for the addressing of active distributors (art. no. BW3304)
- ASi addressing cable with COMBICON connector, connecting cable for ASi Master/Gateways for the addressing of active distributors (art. no. BW3305)