


Voltage relay BA 9036 VARIMETER



- According to IEC 255, EN 60 255, VDE 0435 part 303
- Single-phase
- Measuring ranges from 24 to 400
- Settable response and release value
- Without auxiliary supply
- optionally available with adjustable time delay
- with LED indicators for operation and state of contacts
- 2 changeover contacts
- Width 45 mm

Function diagram

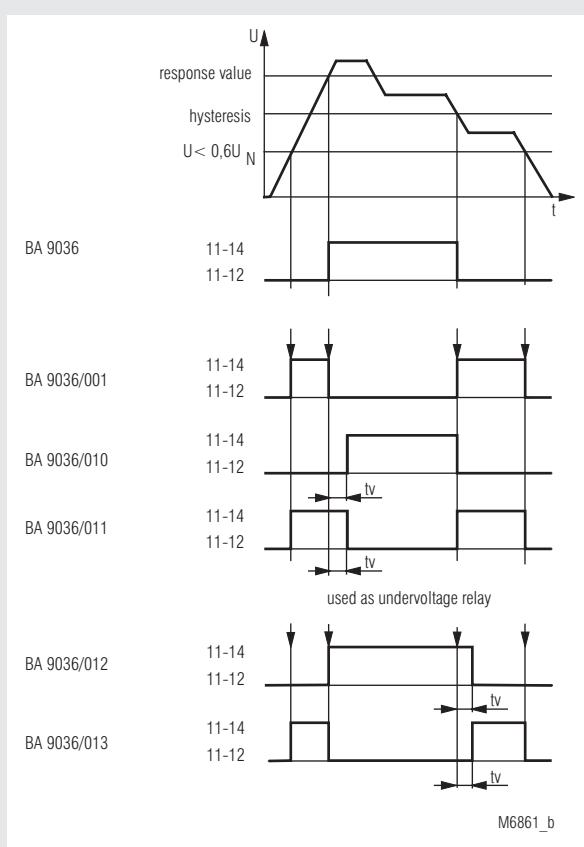

Approvals and marking




Application

Monitoring of voltage in DC and AC systems

Indicators

upper LED: on, when voltage connected
lower LED: on, when output contact activated

Circuit diagrams

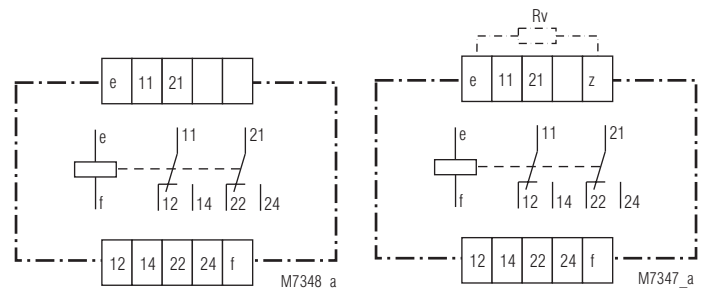

BA 9036
connection diagram for AC voltage

BA 9036
connection diagram for DC voltage

When using a drop resistor the measuring has to be connected to e⁺ and f

Technical Data

Input

Nominal voltage U_N:	AC 42, 110, 127, 230, 240, 290, 400 V DC 24, 48, 60 V DC 110*, 127*, 220*, 240 V* *) with external drop resistor
Nominal consumption:	6 VA / 10 W
Nominal frequency:	50 / 60 Hz
Frequency range:	± 5 %
Temperature influence:	< 0.05 % / K
Max. overload:	1.2 U_N continuously

Setting ranges

Setting:	0.85 ... 1.05 U_N
Hysteresis:	0.75 ... 0.95 of setting value
Setting accuracy:	± 5 %
Repeat accuracy:	± 0.5 %
Time delay t_d:	0.5 ... 10 s adjustable ($U > 0.6 \times U_N$)

Output

Contacts:	2 changeover contacts	
Thermal current I_{th}:	6 A	
Switching capacity to AC 15		
NO contact:	3 A / AC 230 V	IEC/EN 60 947-5-1
NC contact:	1 A / AC 230 V	IEC/EN 60 947-5-1
Electrical contact life to AC 15 at 1 A, AC 230 V:	≥ 2.5 x 10 ⁵ switching cycles	
Short circuit strength max. fuse rating:	4 A gL	IEC/EN 60 947-5-1
Mechanical life:	30 x 10 ⁶ switching cycles	

General Data

Operating mode:	Continuous operation	
Temperature range:	- 20 ... + 60°C	
Clearance and creepage distances		
rated impuls voltage / pollution degree:	4 kV / 2	IEC 60 664-1
EMC		
Electrostatic discharge:	6 kV (air)	IEC/EN 61 000-4-2
Fast transients:	2 kV	IEC/EN 61 000-4-4
Surge voltages between wires for power supply:	1 kV	IEC/EN 61 000-4-5
between wire and ground:	2 kV	IEC/EN 61 000-4-5
Interference suppression:	Limit value class B	EN 55 011
Degree of protection		
Housing:	IP 40	IEC/EN 60 529
Terminals:	IP 20	IEC/EN 60 529
Housing:	Thermoplastic with V0 behaviour according to UL subject 94	
Vibration resistance:	Amplitude 0.35 mm IEC/EN 60 068-2-6 frequency 10 ... 55 Hz	
Climate resistance:	20 / 060 / 04 IEC/EN 60 068-1	
Terminal designation:	EN 50 005	
Wire connection:	2 x 2.5 mm ² solid or 2 x 1.5 mm ² stranded wire with sleeve DIN 46 228-1/-2/-3/-4	
Wire fixing:	Flat terminals with self-lifting clamping piece IEC/EN 60 999-1	
Mounting:	DIN rail IEC/EN 60 715	
Weight:	310 g	

Dimensions

Width x height x depth:	45 x 73 x 132 mm
--------------------------------	------------------


Standard type

BA 9036 AC 230 V 50 / 60 Hz		
Article number:	0045288	stock item
• Nominal voltage U_N :	AC 230 V	
• Width:	45 mm	

Variants

BA 9036/61:	with UL approval
BA 9036/001:	overvoltage / closed circuit operation
BA 9036/010:	overvoltage / open circuit operation / time delay
BA 9036/011:	overvoltage / closed circuit operation / time delay
BA 9036/012:	undervoltage / closed circuit operation / time delay
BA 9036/013:	undervoltage / open circuit operation / time delay

Ordering example for variants

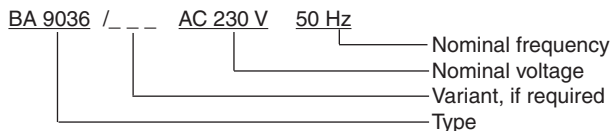

Characteristic

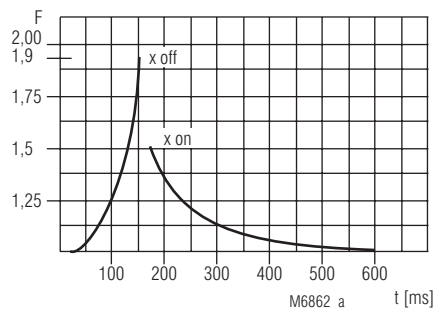


Diagram switching delay

Switching delay t_M :

The characteristic shows the switching delay depending on the values of X_{on} - X_{off} when switching the voltage on or off. A slow voltage change reduces the delay.

Example:

$$U_{\text{setting}} = 200 \text{ V} \quad U_{\text{applied}} = 230 \text{ V}$$

$$F = \frac{230 \text{ V}}{200 \text{ V}} = 1.1$$

$$F = \frac{U_{\text{applied}}}{U_{\text{setting}}}$$

$t_{M, \text{on}} = \text{approx. } 300 \text{ ms}$
 $t_{M, \text{off}} = \text{approx. } 60 \text{ ms}$

Accessories

ZWS 20 SL, ZWS 35 SL

Drop resistor

