


CHARACTERISTIC CURVES AND PERFORMANCE DATA 50 Hz n = 2900 rpm

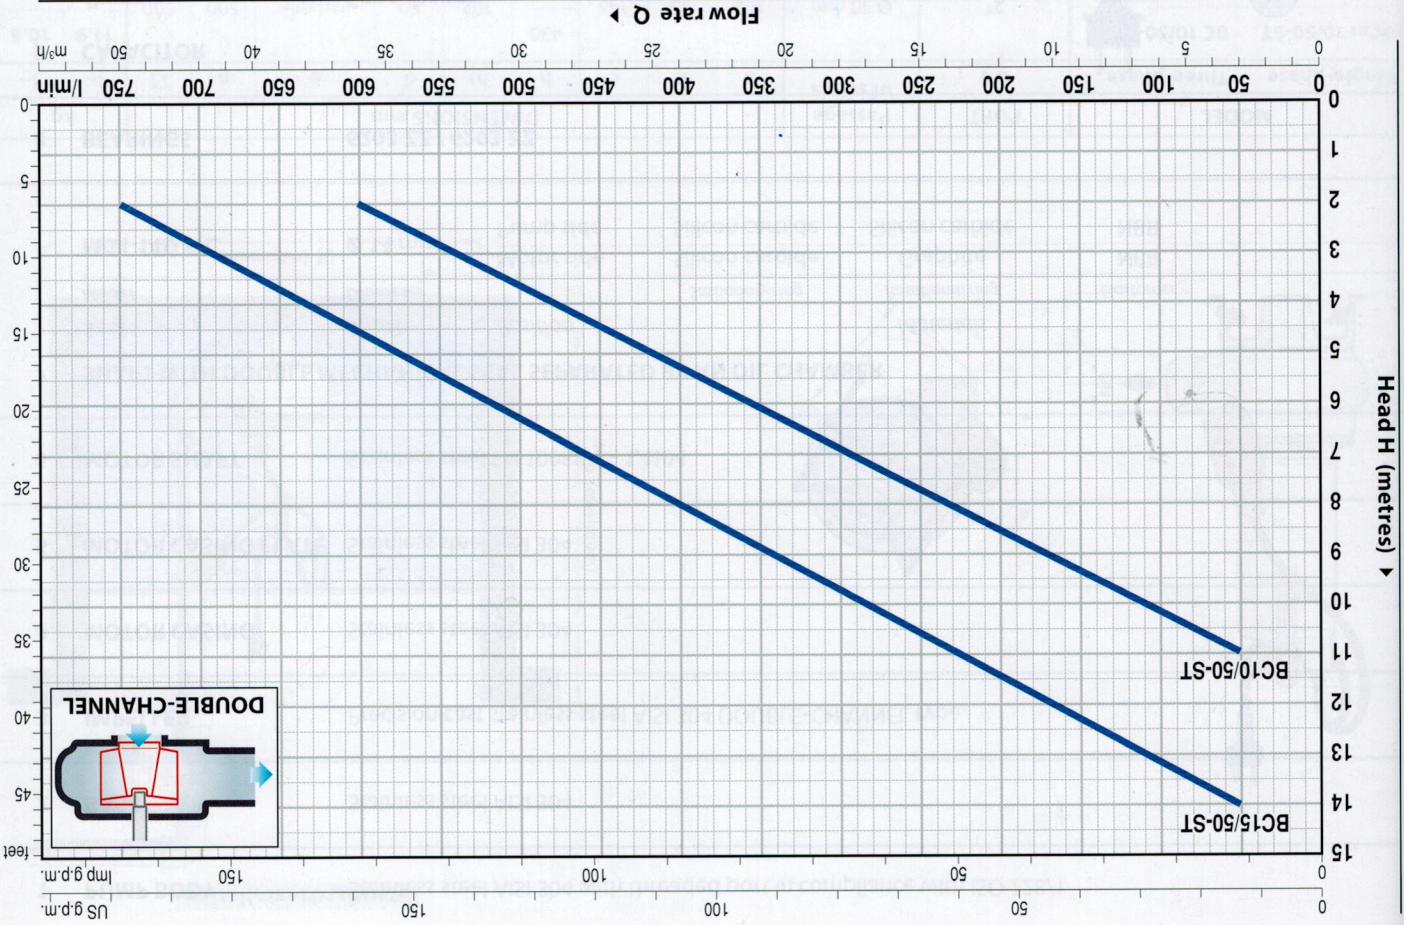

MODEL		POWER (P ₂)	Q	H metres											
Single-phase	Three-phase	KW	HP	l/min	0	50	100	150	200	300	400	500	600	700	750
BC 10/50-ST	BC 15/50-ST	0.75	1	12	11	10	8.5	7	5	3.6	2				
		1.1	1.5	15	14	13	11.5	9.7	8	6.3	4.6	2.9	2		

Tolerance of characteristic curves in compliance with EN ISO 9906 Grade 3B.

Q = Flow rate H = Total manometric head