


Test Probes Catalog 2013/2014



Automotive

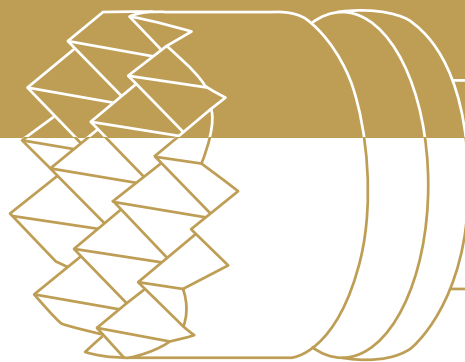


Telecommunications



Information Electronics




Engineering



Consumer Electronics



Energy supply



Aviation and space technology



Medical



Competent in your field

**Your requirements are getting more demanding;
we will support you with specialized solutions.**

With more than 20,000 variants we offer you our comprehensive assortment in proven quality:

- For **ICT/FCT** we offer you the worldwide largest variety of variants in regard to series, tip-styles and spring-forces.
- In **Cable Harness Test** we guaranty you the best contact to your connections.
- For high-frequency and digital signals we recommend our **RF Probes**.
- Testing highest currents in in the smallest spacing with low-ohm **High-current Probes**.
- Our choice of spring-loaded **Switching Probes** ensures simple switching.
- The **Pneumatic Probes** from INGUN offer unbeatable versatility.



Is your solution not included?

If not, then speak to us and we'll develop and manufacture your customized solution; tailor-made for your requirements.

Grid in mm (Mil)	Recommended Stroke in mm	Max. Stroke in mm	Current Rating in A	ICT / FCT	Combined ICT-/FCT-Test	Cable Harness Probes	Solderable Probes	Battery Probes	Micro-Contacting	RF-Applications (HFS)	High-Current Applications	High Temperature Range	Component Presence Check	Individually controllable Probes	Interface Probes	Low Installation Height	High Installation Height	Short-stroke Probes	Long-stroke Probes	Through (continuous) Plunger	Non-Rotating Probes	Rotating Probes	High Spring Forces	Stroke-measurement Probes	Series	Page		
Flying Probes																												
2,54	4	5,3/8	5-8																						GKS-112 MD	72		
Rotating Probes																												
1,27	4,3	6,35	2-3	•																					DKS-050	74		
1,91	4,3	6,35	3-4	•																					DKS-075	74		
2,54	4,3	6,35	5-8	•																					DKS-100	74		
2,54	4,8	6	5-8																						GKS-725	75		
4,5	4	5	5-8																	•		•			GKS-713	76		
Switching Probes																												
2,54	5	6	3										•												SKS-100	78		
2,54	4	5	3										•												SKS-215	79		
3,5	4	5,2	5										•												SKS-415	80		
3,5	6,4	8	5										•						•						SKS-425	81		
7,5	11,2	14	5										•												SKS-419	82		
10	12,8	16	5										•												SKS-429	82		
Pneumatic Test Probes																												
3,5	6	10	2										•												PKS-355 M	84		
4,5	12	20	2-3										•												PKS-388 M	85		
3,5	6	10	2										•												PSK-350 M	86		
1,91	6	10	2										•												PKS-171	87		
2,54	6	10	2										•												PKS-200	88		
2,54	6	10	3										•												PKS-220	89		
3,5	12	20	3/10								•		•						•						PKS-299	90		
3,5	6	10	3/10								•		•												PKS-300	91		
4,5	12	20	3/10								•		•						•						PKS-399	92		
4,5	6	10	3/10								•		•												PKS-420	93		
-	-	-	-																						PKS Accessories	94/95		
Radio-frequency Test Probes / Dipole Test Probes																												
2,54	5,5	7,5	3																							HFS	98/99	
2,54	5,5	7,5	3																							HFS-010	100	
4,5	4	5	3																							HFS-110	101	
High-current Test Probes																												
2,54	4	5,3/8	16									•	•													HSS-118	104	
4	4	5,3	24									•	•													HSS-120	105	
4	2,8	3,5	24			•	•	•										•		•						HSS-520/520M	106	
5,08	4,4	5,5	50										•	•												HSS-150	107	
12	7	9,5	25										•	•												HSS-2259	108	
16	7	10,5	35										•	•												HSS-2513	108	
20	7	12	100										•	•												HSS-2516	108	
30	7	11	200										•	•												HSS-2526	108	
35	7	11	400										•	•												HSS-2532	108	
Interfaces / Customizing																												
2,54	2,6	3,1	5												•	•										GKS-945	110	
2,54	3,2	3,9	5												•	•										GKS-946	110	
2,54	3,6	4,3	5												•	•										GKS-938	110	
2,54	3	4	5												•	•										GKS-100 357 150 ...	110	
2,54	4,3	6,35	5												•	•										GKS-100 307 150 ...	110	
5,08	4,3	6,35	5												•	•										GKS-100 306 229 ...	110	
															•	•										KT-...	111	
5	5	6	5																							GKS-925 TJA	112	
1,91	4,3	6,35																						•		HMS-075	112	
2,54	4,3	6,35																						•		HMS-100	112	
2,54	6,4	8																						•		HMS-422	112	
4,5	9,2	11,5																	•							GKS-416	113	
5	4,8	6,5																								GKS-102	113	
4,5	11,2	14	5-15																•							GKS-504	113	
8	9,6	11,2	5-8																•							GKS-414	113	
																										Fixtures Accessories	114-116	
Insertion and Extraction Tools																												
																											SW/ZW/AW	118


Complete Solutions from one Supplier

Test Probes



Test Probes: The high-precision Test Probes are the heart of every test. With more than 20,000 variants in more than 400 series INGUN provides the largest assortment worldwide; from a standard Test Probe to an individually manufactured Test Probe.

The Radio-Frequency Probes are listed in a separate Catalog. There you can find directly the suitable RF-Probes via a Jack/Plug Register.



Test Fixtures

Test Fixtures: Mechanical, pneumatic and vacuum- operated Test Fixtures as well as special customized contacting units are developed and manufactured by INGUN for all common Test Systems. The strength lies in special Test Fixture design and build, because over 40 years of experience provides sophisticated and extraordinary solutions.

INGUN plays a special role in regard to the verify quality of Test Fixtures. These can be checked at various manufacturing stages with the use of an optical measuring machine. A unique service!

Content

Contents Test Probes	inside cover
Team	Page 4+5
Technical Information	Page 6-13
Overview of Tip-Styles	Page 14+15
Special Applications	Page 16

Test Probes

Register Overview – Test Probes	Page 17
INGUN Test Probes for reliable contacting of lead-free Surfaces and Solder Materials	Page 18
Datasheets and technical information – Test Probes	Page 19-118

Test Probes for Cable Harness Testing

Register Overview – Test Probes	Page 119
Contents Cable Test Probes	Page 121
Datasheets and technical information – Test Probes	Page 125-171

Fax Sheet	Page 172
INGUN Test Probes according to Series	Page 173

INGUN: Quality through Precision

Since 1971 INGUN is the reliable partner for innovative technology in the field of Test Equipment and for well thought-through testing strategies. INGUN offers an extensive range of Test Probes, Test Fixtures and for individual testing tasks and is a globally active company with its headquarters in Konstanz Germany and over 40 Agencies worldwide.

INGUN Test Probes: This is where Quality Assurance begins

The variety of Test Probes is unique! With more than 20,000 variants in over 400 series, INGUN offers you an unsurpassed choice of Test Probes for every testing task. Spring-loaded, Pneumatic, as a Switching Probe, a High-frequency or a High-current Probe as well as a Rotating or non-rotating Probe – with over 50 different tip-styles.

INGUN supplies Test Probes for SMD-Technology in grids of 25 mil (0.635 mm), 50 mil (1.27 mm), 100 mil (2.54 mm) and up to 250 mil (6.35 mm). And should you not find a suitable Test Probe for your demands, then INGUN will provide you with an individual, special solution.

Manufacturing in accordance to customer demands

Whether a customized, special solution or in large volume: Test Probes from INGUN are developed and manufactured with a high quality standard. CAD-supported design engineering as well as manual and automated production and assembly ensure precise, rational and efficient manufacturing. The Test Probes are continuously tested under laboratory conditions using computer-controlled fully automatic fatigue-test stations. For best quality and long life.

Solutions for the Market of tomorrow

More and more sophisticated test requirements and new developments on the market demand from INGUN innovative ideas and the continuous introduction of new products. With its own Innovation Dept., INGUN is always one step ahead of these increasing demands. The experienced engineers develop customer-orientated product concepts, which lead to cost-/performance optimization. With the customer demands from tomorrow in view, visions become reality.

Quality "Made in Germany"

INGUN sees it as a future obligation to continue to be one of the leading manufacturers of Testing Equipment worldwide, and is certified in accordance to ISO 9001.

ISO 9001



ingun[®]

PRÜFMITTEL



Your Contact Partner

The competent employees from INGUN are available when a solution to your testing requirements is needed. From the choice of the most suitable Test Probes to the supply of your customized solution and more: INGUN is your competent and flexible partner. Get in contact with us!

Tel. +49 7531 8105-0
Fax +49 7531 8105-65
info@ingun.com
www.ingun.com



- 1** Supervisory Board
Wolfgang Karl
- 2** Managing Director
Armin Karl
- 3** Commercial Director
Jochen Müller
- 4** Technical Director
Michael Eisele



5



6



7



8



9



10



11



12



13



14



15

5 Reception
Gabriele Seifritz

6 Head of Export Sales
Reginald Rudd

7 Head of Sales
D-A-CH-Benelux
Sigfrid Nagel

8 Export Manager
Europe/North Africa
Katharina Schrage

9 Export Manager
North America
Matthias Zapatka

10 Export Manager
Asia
Chang Geng

11 Export Manager
Central- and South
America
Basil Ott


12 Order Processing
Test Probes
Inge Salewski

13 Order Processing
Test Probes
Christina Staack

14 Order Processing
Test Probes
Manuela Martin

15 Order Processing
Test Probes
Alexandra Muly

Design of INGUN Test Probes

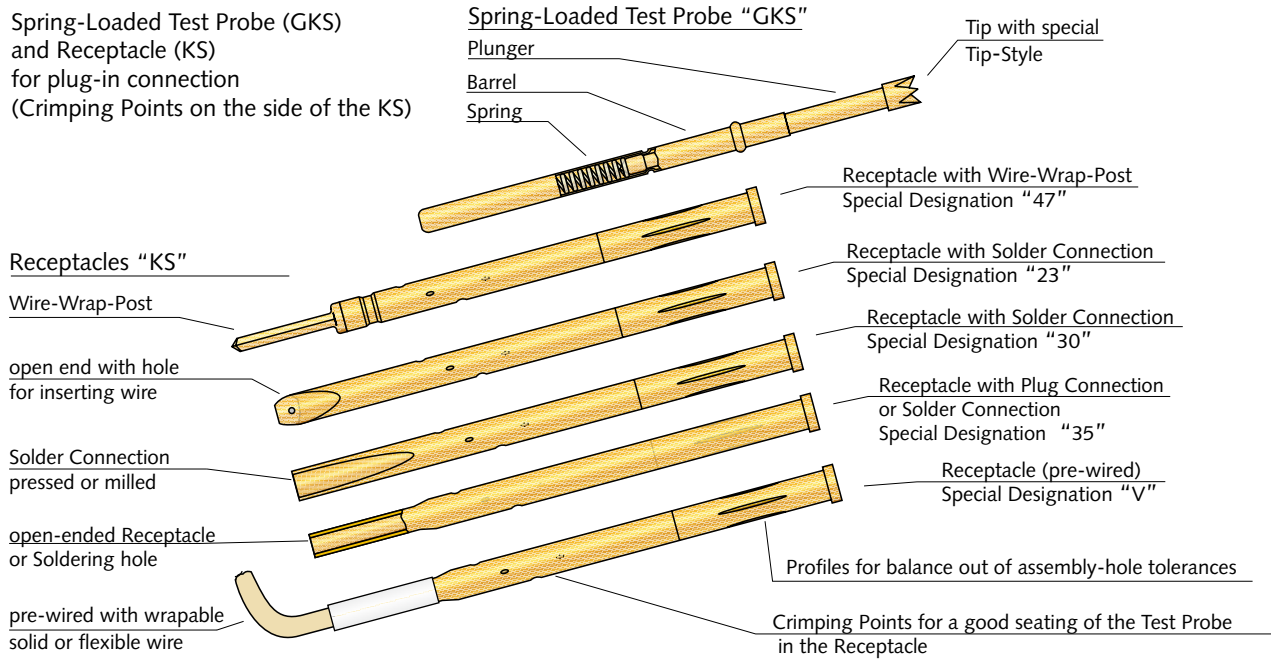

Spring-loaded Test Probes (GKS) normally consist of 3 individual components. All components must be manufactured with the type of precision, which is demanded by the micro-electronics industry.

The Plunger with the contacting zone is available in a large choice of tip-styles. It must provide the smallest possible contact resistance between the Test Probe and test point, to ensure that measurement results are not distorted. The most common plunger materials are Steel and BeCu-both of which are hardened. For very passive tip-styles brass is also used.

The Spring provides the necessary contact pressure, and this even after several hundred thousand strokes (testing cycles). The specified spring-forces are reached with the recommended working stroke and are subject to a tolerance range of +/- 10–15%; this being due to the parameter restrictions when designing and manufacturing springs for such small components.

For easy measurement of the spring forces, common spring-force measuring gauges are used.

The Barrel accommodates the plunger and the spring. The actual measurement signal flows via the barrel to the Receptacle. To improve the smooth movement, after gold-plating the barrel is treated with a very thin organic protective layer.

The Receptacle (KS) provides easy interchange of the Test Probe during maintenance and servicing of the Test Fixture. The exchange can be carried out fast and without any wiring work. To enable this, crimp points are applied to the side of the Receptacle. Note: the crimp points only function properly when the Receptacle has been inserted in the assembly hole. This means that pre-insertion of the Test Probe in the Receptacle is not possible!


INGUN-Receptacles

A special feature of the INGUN Receptacles of the newest generation is the so-called "INGUN-Profile". This is a lengthwise crimp (applied either three or four times), which is positioned directly below the collar or press-ring of the Receptacle.

The Profile plays the following roles:

- Equalises differences of the drilled hole diameter
- Leads to a smooth insertion force of the Receptacle in the assembly hole
- Allows self-registration of the Receptacle and also prevents slanting
- Guides and centres the Test Probe
- Reduces the influence of the assembly hole on the securing force of the Test Probe

Normally, the "INGUN-Profile" is combined with the "INGUN Spiral Crimp". This is a "4-Point Crimp", which is applied to the lower end of the Receptacle in a spiral shape spread out over 360°.

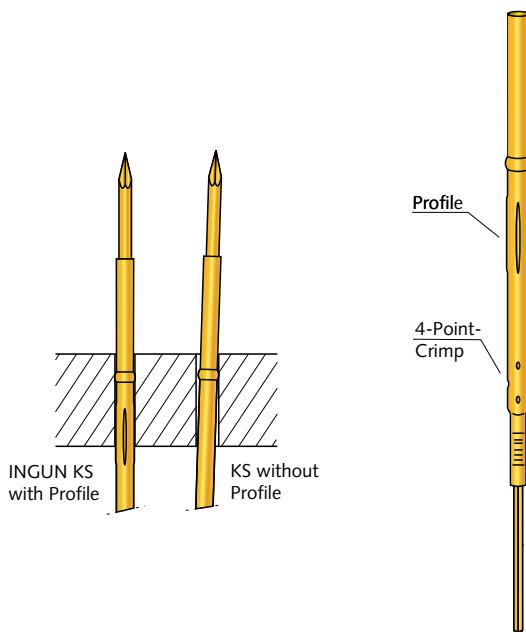

This type of securing crimp ensures:

- Low and smooth insertion forces
- Smooth extraction forces of the Test Probe
- High flexibility and elasticity of the securing crimp points to increase the number of insertion cycles of the Test Probe

These excellent insertion and securing conditions derive from the fact that the various securing levels are gradually reached and the crimp points are only slightly malleably deformed. Subsequently, the final securing force of the Test Probe is only then achieved when the last crimp point has been reached.

To ensure the resilience of the crimp it is not allowed to solder or coat them with plastic.

3D-CAD Models of the Test Probes in Internet

On our Homepage www.ingun.com you can download our CAD-Data of the Test Probes as 3D Models in STEP format, and then open them in your CAD-program. This service offers you the possibility to implement our models in your design work.

The 3D-CAD Models of the Test Probes can be found under "Downloads -> Downloads Test Probes".

Composition of INGUN Test Probes

Base Materials

The choice of the base materials is dependent on the demands put on each individual component.

Brass is sometimes used for passive tip-styles and for machined barrels. The high percentage of copper makes it an ideal electrical conductor. Brass, however, is too soft for aggressive tip-styles.

Steel is used for practically all aggressive tip-styles. It provides a high level of hardness and sharpness of the points and the flanks. This ensures good durability and reliable contacting.

BeCu (Beryllium-Copper) provides a good combination and compromise between brass and steel: The high percentage of copper makes it an ideal electrical conductor and the small percentage of Beryllium allows the base material to be hardened (up to 435 HV). This then ensures good durability and optimizes the aggressiveness of the plunger tip.

New-Silver (NiAg) and Bronze are mainly used for Receptacles and the Barrels of the Test Probes. These materials have a high tensile strength, which is ideal for the long-term life of Test Probes. Furthermore, these materials provide a good elasticity of the crimps on the Receptacles.

Spring Steel of the highest possible quality is used for the manufacturing of the springs. For high and low temperature ranges, certain high-alloyed spring steels (i.e. stainless steel) are used.

Plating Materials

Hard-gold, chem. Nickel and Rhodium are used. The choice of plating materials is made according to functional features.

Hard-gold: best chemical resistance, Hardness 150–200 HV. Especially good against oxidation.

Rhodium: extremely good resistance to wear, Hardness 600–1000 HV; very brittle. Usage when special demands in regard to durability of the plunger tip are required. Because of the brittleness, this plating material is not suitable for aggressive tip-styles in conjunction with high spring forces.

Chem. Nickel: very good chem. resistance, Hardness 400–600 HV. Important because of the true depositing, i.e. without build up on points and edges (so-called “dog-bone” effect). Very suitable as durable layer for plungers. Because of the relatively high ductility. This plating material is ideal for aggressive tip-styles.


Aurun: this gold-alloy plating type was developed especially for Test Probes and has a very good chem. resistance. Hardness 300–350 HV. Usage for aggressive tip-styles for testing unwashed PC-Boards.

All plating materials guarantee the best contacting reliability due to the very low specific resistance values.


EG Environmental Legislations

Numerous European Environmental Legislations have the aim to ensure a high level of protection of human health and the environment. For this reason, the business decisions and actions of INGUN Prüfmittelbau GmbH are always regarded in the interest of these legislations.

For the presently most important European Environmental Legislations, INGUN has prepared official statements, which are always up to date and available on our homepage www.ingun.com/company



General Definitions and Criteria

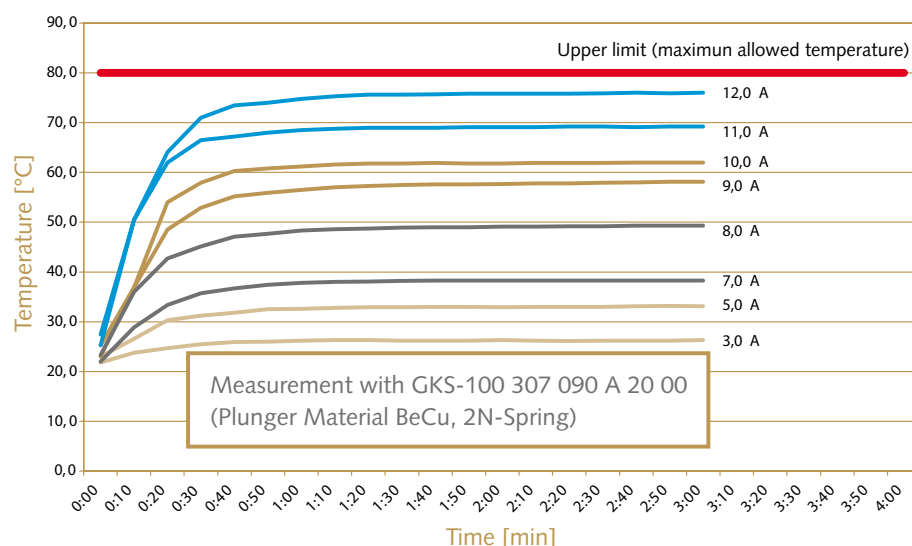

The following diagram shows the evaluation of a Test Probe of the series GKS-100 with a BeCu Plunger and 2,0 N spring-force.

Current Loading

The transferable permanent current of Test Probes depends on the size of the components, the spring force and the used plunger material. In the case of the plunger material, the following is applicable: BeCu and Brass Plungers transfer higher currents as Steel Plungers. The allowed rated currents are printed on each individual data sheet. These values are valid at room temperature and for direct current – and from the stated “Standard” spring – force at working stroke. In the case of alternating currents, the value must be reduced by the factor $\frac{1}{\sqrt{2}}$.

To avoid damages to the test probes e.g. component contact under load (attached current/voltage) is not allowed.

The maximum allowed current loading (see “Electrical Data” of each product) was derived for each series in extensive load tests. The test set-up called for the various Test Probe series and spring forces to be loaded with a certain current, during which the temperature change of the Test Probe was measured. The increase of the current was applied in steps of 1–2 Amps, but only as long as no temperature increase was registered.

General Definitions and Criteria

Drilling Tolerances

When machining the assembly holes in the Probe-Plate (KTP) it is necessary to differ between the diameter of the drilled hole and the diameter of the actual drill. The sizes in the catalog are related to the diameter of the drilled hole. This size can be measured with a common plug gauge.

Depending on the material and the thickness of the probe-plate, the diameter of the drill should be chosen 0.01–0.03 mm larger. At the same time, other parameters such as, e.g. drill speed and feed etc. also play an important role. Note: it is vital to carry out drilling tests beforehand.

The materials FR4/G10 (glass-fibre enforced synthetic material) and CEM1/Trolitax (hard-paper impregnated with resin) have proven to be especially suitable as probe-plate materials. Especially in the case of small assembly hole diameters there is an acute danger that the drilled holes become slanted, which leads to the Receptacles and the Test Probes also being slanted when inserted and subsequently results in a negative influence of the contacting accuracy. In this case, INGUN recommends that the assembly holes in probe-plates thicker than > 10 mm are counter-bored from the underside. Furthermore, drilling the holes in steps is also advisable.

Life-expectancy of INGUN Test Probes

To determine the life-expectancy of Test Probes INGUN continuously carries out fatigue tests under laboratory conditions using computer-controlled fully automatic fatigue test stations.

Here the behaviour of important parameters such as contact resistance or the spring force during the life of a Test Probe can be observed and defined. The resulting knowledge is taken into consideration in the development. This guarantees state of the art high-quality standards.

The life-expectancy of Test Probes is a function of various parameters such as spring force, axial loading, current loading as well as external influences such as contamination and temperature.

INGUN has avoided printing out here any diagrams and tables of tests, which were carried out under laboratory conditions, because such results would only give the user a false impression. This being because the above stated influences are non-calculable factors, which can have a decisive influence on the life-expectancy of a Test Probe. Under laboratory conditions it is possible that some Test Probes series will do well over 1 million cycles, but the actual period of usage could well be much less because, for example, the strong general wear of the Test Probe leads especially to wear of the contacting zone-resulting in a drastic increase of the contact resistance values.

Application Temperature Range

INGUN Test Probes can be used without any problems between -40°C and +80°C. For lower and higher temperature ranges there are many special solutions available (see List of Contents: "High Temperature" or "Application Temperature Range" by the various Probe series).

These Test Probes are normally recognisable with the special designation "C" (-100°C to +200°C). Certain high-alloyed (stainless steel) spring steel types are used, which however have the disadvantage that the transition resistance is up to factor 10 higher as by standard Test Probes. Apart from this the constancy of the resistance is affected (i.e. fluctuations are possible).

In the case of these special solutions there is also the danger that greater temperature fluctuations as well as operation in temperatures other than normal can lead to premature breakdown or a reduction of the life-expectancy of the Test Probe.


Wobble and Minimum Test Point Size

Due to the necessary play between the Plunger and the Barrel of a Test Probe, the tip can be deflected out of the ideal (i.e. vertical) position. This deflection, the so-called "wobble", was measured on INGUN Test Probes using a state-of-the-art optical measuring machine. This machine can, on request, also be used to verify customized Test Fixtures. To define the minimum test point size, the various tolerances of the Test Fixture were also taken into consideration.

Basically, the statement can be made that no direct dependency between the wobble and the contacting accuracy of a Test Probe exists. Important is especially the position of the probe tip at the time of actual contacting. For the subsequent stroke it is even often an advantage when a greater wobble exists, because this then helps to reduce the wear when the plunger is pressed down into the barrel. Furthermore, the tendency to bend the Test Probe is reduced and thus the life-expectancy prolonged.

The following diagram shows the deflection of the Plunger from the ideal position (i.e. the centre of the assembly hole) of various Test Probes. The experimental set-up was made with a standard INGUN probe plate, and the Test Probes were inserted in Receptacles. The row of experimental tests was carried out a number of times. Between each measurement the Test Probes were activated a few times.

The result of the investigation offers no information about other factors, which must also be taken into consideration, i.e. the tolerances of the PC-Board and of the Test Fixture assembly as well as the uncertainty and faults, which can be incurred during insertion and removal of Receptacles and Test Probes. Therefore, INGUN recommends the usage of a guide plate (especially in the case of critical applications, i.e. Test Point Size < 0,8 mm) with which the plunger tips are guided. Then, the majority of the tolerances can be ignored.

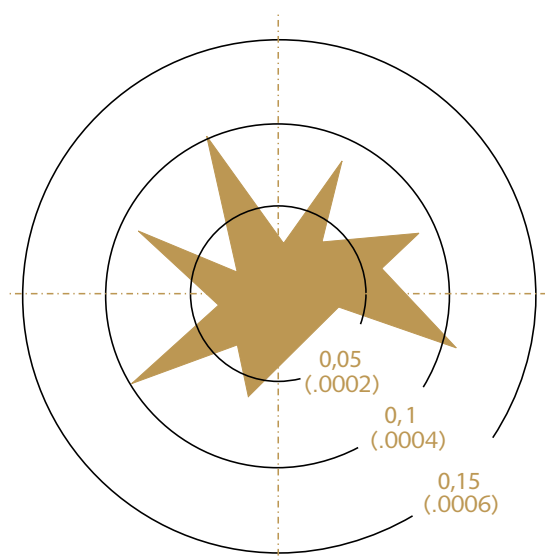

[Measurements in mm (inches)]



General Definitions and Criteria

Recommended Working Stroke and Maximum Stroke

When choosing a Test Probe for a certain application, then not only the installation height and the type of tip-style are important but also the required stroke of the Test Probe.

In the home position, the plunger of the Test Probe is not activated but still has a certain pre-load; the assembly beading then acts as a stop to prevent the plunger coming out of the barrel. The rated spring force is reached when the plunger is activated to the working stroke position. Depending on the series, this lies between 66% and 80% of the maximum stroke.

The following example shows the spring force/stroke movement for the various spring forces offered in the series GKS-100:

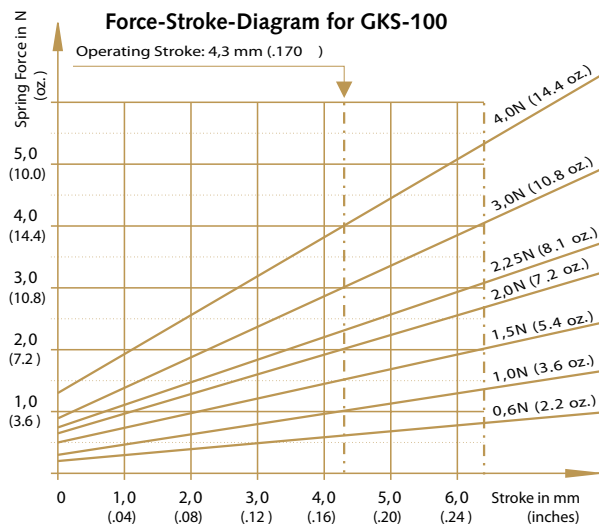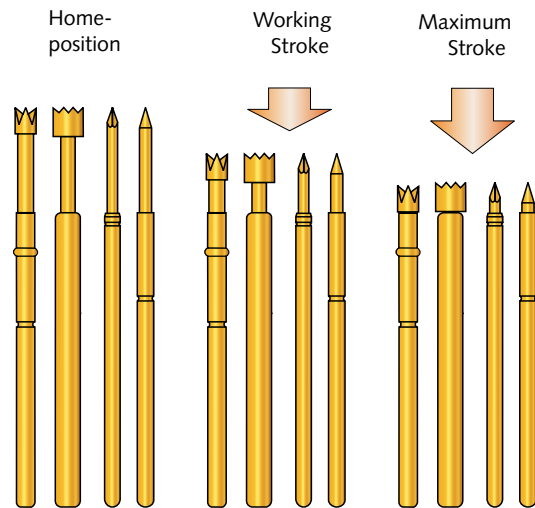


Dependant on whether test pads or component pins are contacted, then the Test Probes make different strokes. In critical cases we recommend that the different installation heights are balanced out. Practically all series offer this possibility, either with the choice of different collar heights (available both by the Test Probes as well as by Receptacles) or with the choice of longer plungers (i.e. L-versions for series GKS-050, 075 and 100).

When customizing a Test Fixture or any other type of Testing Equipment, it is important that the recommended working stroke is strived for. When the maximum stroke is exceeded, then there is the danger that the PC-Board/UUT or the testing equipment (i.e. Test Fixture, Test Probes) are damaged or destroyed.

Collar Height and Installation Height

The Installation Height is the distance between the tip of the plunger of the non-activated Test Probe and the surface of the Probe-Plate. To regulate the Installation Height the Test Probes are normally available with various different Collar Heights. Apart from this, in the case of certain series Spacers are available, which offer further flexibility of the Installation Height. Test Probes, which have the end designation "00" have no collar on the barrel. In the case of these Test Probes, the Installation Height is determined by the Receptacle.

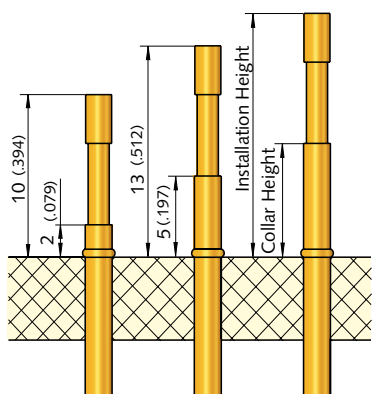


INGUN Part Number

The logical constellation of the INGUN Part No. allows clear identification and recognition of the Test Probes. The individual numbers define the Series, Material, Tip-Style and Diameter, Spring Force and Assembly Conditions (i.e. grid etc.). Within the series, the various combination possibilities are described on each data sheet. After choosing the individual components, the Order No. of the Test Probe can be derived using the following system:


GKS	-	100	2	91	090	A	20	00	C
1		2	3	4	5	6	7	8	9

1	Type of Product	DKS	Rotating Test Probe
		DS	Spacer
		E	e-type Probe
		GKS	Standard Test Probe
		HFS	High-frequency Probe
		HSS	High-current Probe
		HMS	Stroke-measuring Probe
		KS	Receptacle
		KT	Contact Terminal
		PKS	Pneumatic Probe
		PSK	Pneumatic Switching Probe
		SE	Plug
		SKS	Switching Probe
		T	Screw-in Step Probe
		VF	Push-back Probe
		VS	Plug
2	Series		
3	Tip Material	0 =	Nylon (e.g. Delrin)
		1 =	Brass
		2 =	Steel
		3 =	BeCu (Beryllium-Copper)
4	Tip-Style		see "Overview Tip-Styles"
5	Tip Diameter		in mm/100 (e.g. 090 = 0.9mm)
6	Tip Plating	A =	Gold
		G =	Aurun
		N =	Nickel
		R =	Rhodium
		S =	Silver
7	Spring Force		in N (Newton)/10 (e.g. 20 = 2.0N)
8	Collar Height		Collar Height of the Barrel in mm 00 = no Collar
9	Special Designation		(e.g. "C" = heat-proof)


Overview of Tip Styles




Tip Style 01 (30° tip angle)
Commonly used, less aggressive tip for Testpads.




Tip Style 02 (flat)
Very passive tip, for contacting clean test points such as Testpads which shouldn't be punctured, as well as connector and plug-in card terminals.




Tip Style 03 (Inverse Cone)
Common tip for contacting connector pins and wire-wrap posts.




Tip Style 04 (Standard 4-point Crown)
One of the most common tips for contacting component pins. Not to be recommended for unwashed PC-Boards, because tendency to contamination and clogging of solder-resin in the throat of the crown.




Tip Style 05 (flat or bullet-nosed)
Most popular passive Tip Style, for contacting clean test points such as Testpads and even tracks.




Tip Style 06 (serrated)
Universal Tip Style for contacting practically all types of pins (e.g. connectors, WW-posts, component pins etc.).




Tip Style 07 (90° tri-hedral or pyramid)
Most common Tip Style for contacting both plated open-vias and Testpads. Replaces more and more the Tip Style 01. Also used as interface probe tip in conjunction with an INGUN contact terminal (see page 70) for the INGUN VIN Test Fixtures.




Tip Style 08 (90° conical tip)
Also used for contacting plated open-vias, especially when damage to the contacting area must be avoided. Also suitable for contacting mullet-point and plug-in connectors together with low spring-forces.




Tip Style 09 (flexi-needle)
Universal Tip Style for contacting practically all types of test points except plated open vias. Offers a high level of stability combined with flexibility. Often chosen for contaminated, unwashed PC Boards.




Tip Style 13 (30° tip with bullet-nose)
Rather passive tip, commonly used for Testpads where puncturing must be avoided. Also suitable for contacting tracks.



Tip Style 14 (self-cleaning 4-point Crown)
The most commonly used tip for contacting component pins. The modified 04 crown design prevents clogging of solder-resin in the throat of the crown.



Tip Style 15 (22° pressed-in HSS-tip)
Offers a high level of stability and aggressiveness for special contacting demands as far as resistance to wear is concerned.




Tip Style 17 (90° hexagonal)
The six knife-shaped edges centre the tip when contacting plated open-vias. Similar characteristics as Tip Style 07, but much more aggressive.


(aggressive inverse cone, self-cleaning) **Tip Style 19**
 With this modified design of the tip-style 03 an aggressive contacting contour in the centre is created by applying cross grooves. Subsequently, a maximum of contacting reliability is achieved when contacting component pins and wire-wrap posts.



(6-point Crown with higher set middle point) **Tip Style 24**
 Universal usage for practically all test points.



(self-cleaning 3-point Crown) **Tip Style 33**
 A modified version of the 4-point self-cleaning Crown (Tip Style 14), manufactured with ground flanks and therefore very aggressive. Can be used both for component pins as well as Testpads.

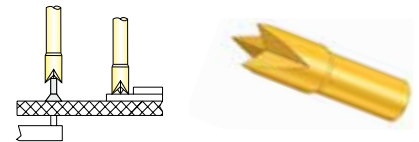

(Passive Dagger, 150° tip angle) **Tip Style 38**
 Comparable with Tip Styles 97 and 98, however with even flatter tip angle, for contacting Open Vias and Pads.



(aggressive tri-hedral tip) **Tip Style 77**
 Universal usage for plated open-vias. Similar characteristics as Tip Style 91 (dagger), however with three contacting edges instead of two. More stable tip, but therefore less aggressive.



(Starshaped tip for contacting Bead Probes) **Tip Style 79**
 Multiblade tip style with self cleaning function.



(8-point Crown) **Tip Style 88**
 Self-cleaning Crown with good centring features. Suitable for contaminated component pins.



(self-cleaning 3-point Crown) **Tip Style 89**
 Recommended for unwashed PC Boards. The special shape of the ground steel tips ensures that any contaminating particles are "pushed" back from the contacting zone around the points.



(Dagger) **Tip Style 91**
 Universal usage, and by far the most popular Tip Style, for not only plated open-vias but also Testpads. Very aggressive, ground flanks.



(Tri-needle, 22° pressed-in HSS-tip) **Tip Style 93**
 Due to the three very aggressive HSS tips, ideal for contacting unwashed PC Boards and other specific testing demand.



(Passive Dagger) **Tip Style 97**
 A modified version of the standard dagger (No. 91), also for universal usage. Designed for plated open-vias which have been closed with sealing lacquer.



(passive Dagger, 90° tip angle) **Tip Style 98**
 Comparable with Tip Style 97, for contacting Open Vias, which are closed with sealing lacquer.



(serrated, with higher-set outer nylon ring) **Tip Style 006**
 Standard serrated tip with higher-set outer nylon ring, designed for component presence-check. The designation "0" is for nylon material, the designation 06 for the inner Tip Style.



INGUN Test Probes for Special Applications



As a Test Probe

Test Probes from INGUN are used to test PC-Boards, among other in the Automotive Industry, Telecommunications or Medicine Technology. They are applied, wherever a highest level of safety and reliability of the end-product is required.

As a component in units

Numerous interesting new solutions and impulses come from the company INGUN in regard to using the advantages of Test Probes also in less-common application areas. Test Probes are used not only as testing equipment but also as components in units; e. g. to provide the necessary reception in mobile telephones, to ensure the contact to batteries in charging stations, as part of a remote control and also used in many other applications.

For example: in the fields of mechanical engineering, telecommunications, vehicle manufacturing and medical technology the high precision of Test Probes and their reliability and long-lastingness are valued.

Our own design dept. works constantly on the application of Test Probes over and above the usual testing tasks. Furthermore, our team of engineers and technicians develop special, individual solutions for specific requirements. Challenge INGUN and ask for the solution to your testing requirements!

Test Probes

e-type® Probes

In-Circuit / Functional Test
(ICT/FCT)

Bead Probes

Fine Pitch ($\leq 1,27$ mm)

Metric Standard Probes
($\geq 2,54$ mm)

Solderable Probes

Short-stroke Probes/
Charging Probes

Flying Probes

Rotating Probes

Switching Probes

Pneumatic Test Probes/
Switching Probes

Radio-frequency Test Probes /
Dipole Test Probes

High-current Test Probes

Interfaces / Customizing

Insertion and Extraction Tools

Cable Harness Test Probes

INGUN Test Probes for reliable contacting of lead-free Surfaces and Solder Materials

Long before the introduction of "lead-free" laws and regulations, INGUN put special emphasis on reliable contacting of lead-free soldered PC-Boards. Close cooperation with our global customers and the resulting production-orientated internal test-runs allows us to promptly use information from diverse contacting applications and areas to constantly further develop our Test Probes in regard to their different types of plating and tip-styles. In addition to the proven and tested aggressive tip-styles "09" (Flexi-needle) and "91" (Dagger) a number of new aggressive tip-styles with flatter tip-angles such as e.g. the tip-styles "38", "97" and "98" have been developed. In conjunction with the right spring-force, these tip-styles enable reliable contacting of the mostly rather thin lead-free surfaces such as e.g. Chem. Sn, Chem. NiAu or OSP – and this despite their high level of hardness and without the danger of short-circuits due to puncturing of the layers of the PC-Board.

For the normally harder and more abrasive lead-free solder materials, which, depending on the application, can also be coated with flux-deposits, making them additionally difficult to penetrate, INGUN now offers the renowned e-type® – High Energy Probes with numerous new series and tip-style variants (see pages 19–21).

Tip-style 38: Contacting of "lead-free" Vias

Due to the changed wetting behaviour of lead-free solder materials then flux-deposits can get into the holes of vias. This problem can be counteracted with new tip geometries such as the tip-style "38".

You can find more information on this subject under www.ingun.com in our Flyer "Contacting of lead-free solder materials and surfaces".



Tip-style 09

Tip-style 91

Tip-style 38

Tip-style 97

Tip-style 98

Sn/Pb with HAL:


Good contact with HAL on the inner-side of Vias.

Lead-free with solder paste Via:

In the case of small point-angles the tip-style strikes flux-deposits before the edges can contact the inner-side of the vias. The tip-style cannot penetrate flux-deposits (blue).

Lead-free with solder paste Via:


With a larger tip-angle (e.g. tip-style 38 with 150°) a reliable contact of the edges of the inner-side of the vias is achieved before the point strikes flux-deposits.

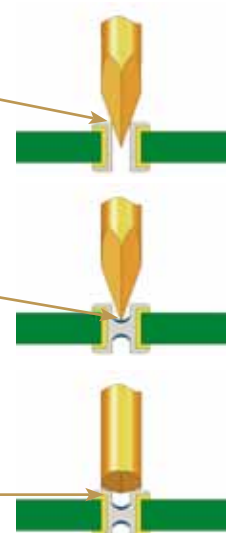

Achieve the highest contacting reliability by minimized stress of the PC-Board with INGUN *e*-type®

INGUN has developed the e-type®-High Energy Probes for the two decisive factors when contacting PC-Boards: The highest level of contacting reliability without additional stress.


The increased contacting reliability of the e-type® series is based on their special performance with up to 100% higher spring-force during initial contacting of the surface of the PCB. This additionally achieved contacting energy ensures an up to 25% larger contacting area of the Test Probe on the PCB. The additional contacting reliability does not, however, increase the stress of the PC-Board, because in the case of the e-type® principle only the pre-load of the spring is increased and the spring-force at working stroke remains the same.

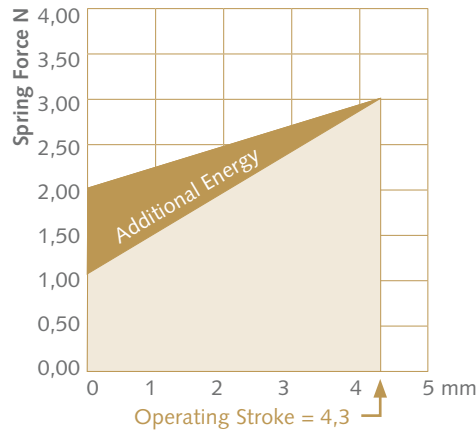

e-type®-High Energy Probe:

- Available in all common grids: 50, 75, 100 mil
- **NEW** 100% compatible to the standard series GKS-050/075/100/422
- **NEW** Maximum stroke is the same as by standard series, i.e. 6.4mm
- **NEW** Numerous new e-type® tip-styles

Production tests on customer sites confirm the effectiveness.

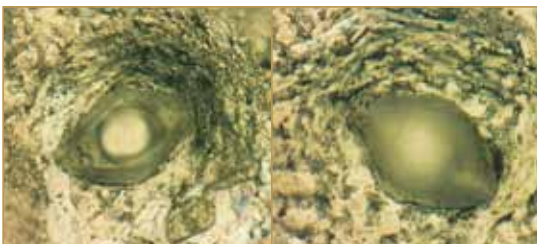

Contacting with Standard Probe (left) and with e-type®-High Energy Probe (right).

You can find more information about e-type® on our homepage www.ingun.com

e-type®

E-050 NEW	20
E-075 NEW	20
E-100 NEW	21
E-422 NEW	21

e-type[®] E-050 / E-075 NEW

ICT-/FCT Test Probe for difficult contacting demands

Grid:






1,27 / 1,91 mm

50 / 75 Mil

Installation Height: 16,0 mm (.630) / variable

Recommended Stroke: 4,3 mm (.169)

Mounting and Functional Dimensions

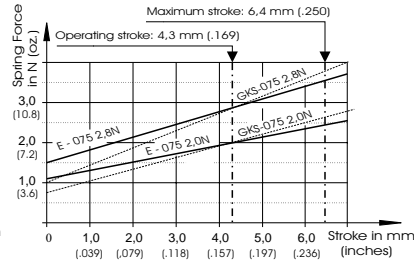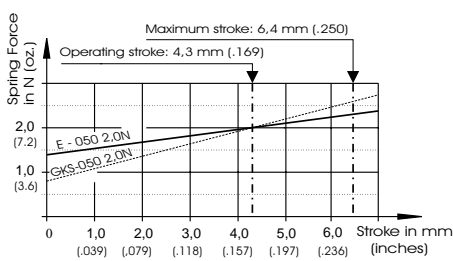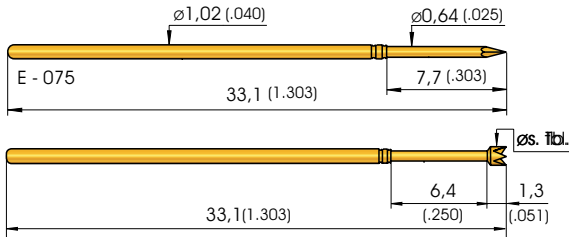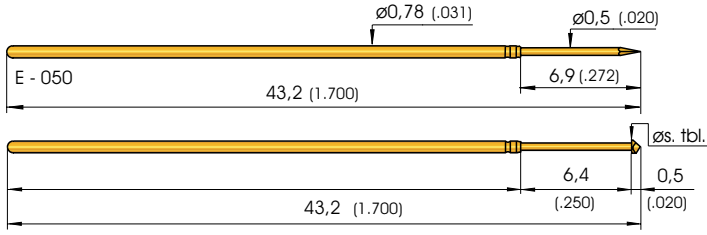

Collar Height and Installation Height, Receptacles, Electrical Data, Mounting Hole Size and Materials:
see compatible Standard Probe series GKS-050/075

e-type	compatible Probe	Page
E-050	GKS-050	25
E-075	GKS-075	26 / 27

Mechanical Data
Working Stroke: 4,3 mm (.169)
Maximum Stroke: 6,4 mm (.250)

Spring Forces at Working Stroke

Series	Designation	Pre-Load	Force at Work. Stroke
E-050	20	1,4 N (5.1oz)	2,0 N (7.2 oz)
E-075	20	1,2 N (4.3oz)	2,0 N (7.2 oz)
E-075	28	1,6 N (5,8oz)	2,8 N (10.1 oz)

Available Tip Styles E-050

Material	Tip Style	Plating	Further Versions	
			∅	∅ (inch)
2 01		A		
3 07		A	0,90	A
2 14		A		
2 38		A		
2 77		A		
2 91		A		
2 97		A		

Available Tip Styles E-075

Material	Tip Style	Plating	Further Versions	
			∅	∅ (inch)
2 01		A		
2 07		A	1,20	(.047)
2 09		A		
2 14		A	1,00	(.039)
2 24*		A	∅ 1,30	(.051)
2 38		A		
2 77		A		
2 91		A		
2 97		A		
2 98		A		

* higher middle tip plus 0,2 mm

Ordering Example

Series	Tip Material 2 = Steel 3 = BeCu	Tip Style	Tip Diameter (1/100 mm)	Plating A = Gold	Spring Force (dN)	Collar Height (mm)
--------	---------------------------------------	-----------	----------------------------	---------------------	----------------------	-----------------------

Test Probes:




E	050	2	91	050	A	20	00
E	075	2	91	064	A	20	00

Grid:
≥ 2,54 mm
≥ 100 Mil

Installation Height: 16,0 mm (.630) / variable

Recommended Stroke: 4,3 mm (.169) bzw. 6,4 mm (.252)

Mounting and Functional Dimensions

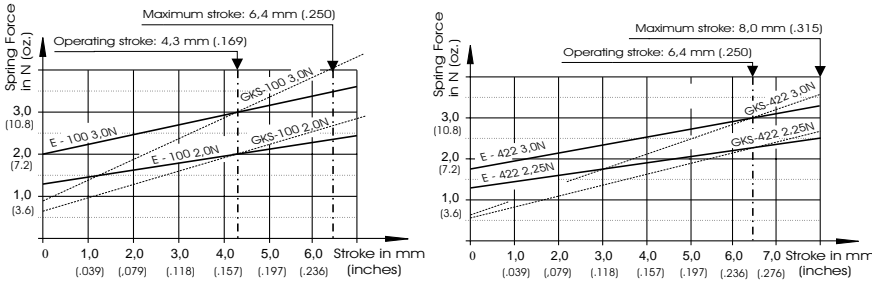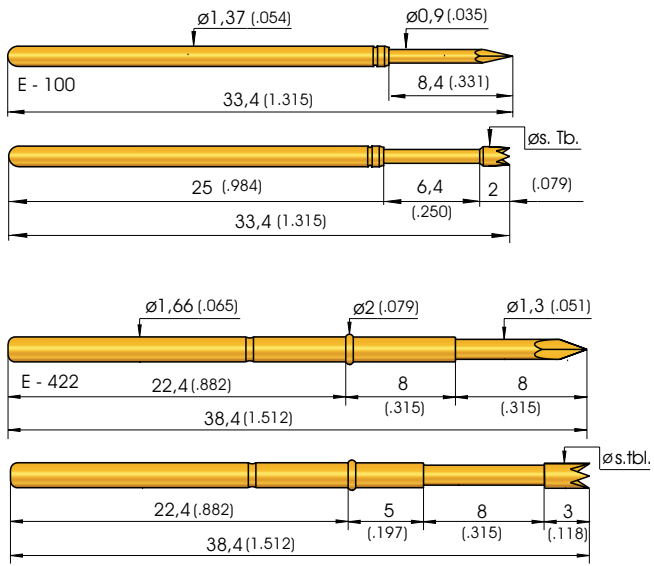

Collar Height and Installation Height, Receptacles, Electrical Data, Mounting Hole Size and Materials:
see compatible Standard Probe series GKS-100/422

e-type	compatible Probe	Page
E-100	GKS-100	28 / 29
E-422	GKS-422	53

Mechanical Data E-100	
Working Stroke:	4,3 mm (.169)
Maximum Stroke:	6,4 mm (.250)
Mechanical Data E-422	
Working Stroke:	6,4 mm (.250)
Maximum Stroke:	8,0 mm (.315)

Spring Forces at Working Stroke

Series	Designation	Pre-Load	Force at Work. Stroke
E-100	20	1,3 N (4.7 oz)	2,0 N
E-100	30	2,0 N (7.2oz)	3,0 N
E-422	22	1,3 N (4.7oz)	2,25 N
E-422	30	1,8 N (6.5oz)	3,0 N

Available Tip Styles E-100

Material	Tip Style	Plating	Further Versions		
			∅	∅ (inch)	
2 01		∅ 0,90 (.035)	A		
3 07		∅ 0,90 (.035)	A		
3 07		∅ 1,50 (.059)	A		
2 09		∅ 0,60 (.024)	A		
2 14		∅ 0,50 (.020)	A		
2 14		∅ 1,30 (.051)	A		
2 24*		∅ 1,30 (.051)	A		
2 38		∅ 0,90 (.035)	A		
2 77		∅ 0,90 (.035)	A		
2 91		∅ 0,90 (.035)	A		
2 97		∅ 0,90 (.035)	A		
2 98		∅ 0,90 (.035)	A		

* higher middle tip plus 0,4 mm

Available Tip Styles E-422

Material	Tip Style	Plating	Further Versions		
			∅	∅ (inch)	
2 01		∅ 1,30 (.051)	A		
3 07		∅ 1,30 (.051)	A		
2 09**		∅ 0,80 (.011)	A		
2 14		∅ 1,30 (.051)	A	2,00 (.079)	
2 24***		∅ 1,80 (.071)	A		
2 33		∅ 1,30 (.051)	A		
2 91		∅ 1,30 (.051)	A		

** pressed-in Steel point in Base Plunger made of Brass
*** higher middle tip plus 0,5 mm

Ordering Example


Series	Tip Material	Tip Style	Tip Diameter (1/100 mm)	Plating	Spring Force (dN)	Collar Height
	2 = Steel 3 = BeCu			A = Gold N = Nickel		00 (E-100) 05 (E-422) 08 (E-422 *) * with Tip Style „01“ and „09“

Test Probes:

E	100	2	91	000	A	30	00
E	422	2	91	130	A	30	05



Component Presence-Check



Apart from the possibility to carry out a component check, with a Switching Probe connector pins or component pins can, for example, also be checked by using a Standard Test Probe with an insulated tip ("006"). This type of test, however, is based on the presumption that the component, which must be checked can respond to an electric signal. In the case of the component not being present, then the insulated ring on the tip of the Test Probe rests against the PC-Board and the signal is not transferred.

In-Circuit / Functional Test (ICT/FCT)

GKS-040	24
GKS-050	25
GKS-015	25
GKS-075	26 + 27
GKS-100 NEW	28 + 29
GKS-035	30
GKS-135	31
GKS-101	32
GKS-001	33
GKS-002	34
GKS-003	35
GKS-004	36
GKS-005	37
KS-040 WL	38
KS-550 WL	38
KS-075 WL	38
KS-100 WL	38
GKS-550	38

Screw-in Test Probes from page 125 on.

GKS 040

ICT-/FCT Test Probe

Grid:



≥ 1,00 mm

≥ 40 Mil

Installation Height: 16,0 mm (.630) / variable

Recommended Stroke: 4,3 mm (.169)

Mounting and Functional Dimensions

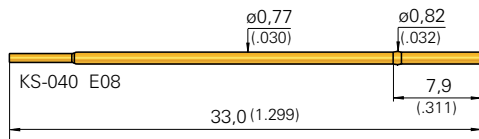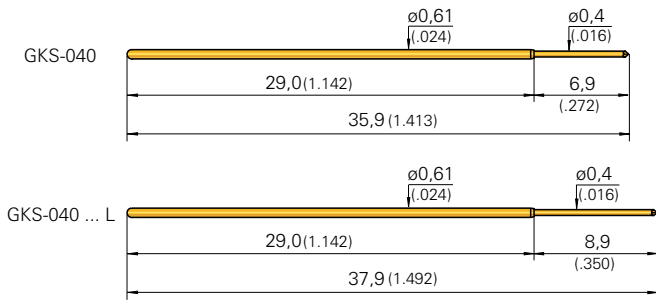

Available Tip Styles

Material	Tip Style	Plating	Further Versions	
			∅	∅ (inch)
3 04	∅ 0,40 (.016)	A		
3 05	∅ 0,40 (.016)	A		
2 22	∅ 0,32 (.013)	A		
2 38	∅ 0,40 (.016)	A		
2 97	∅ 0,40 (.016)	A		

* conical down to ∅ 0,40 mm


Available Tip Styles Special Version GKS-040...L

Material	Tip Style	Plating	Further Versions	
			∅	∅ (inch)
2 97	∅ 0,40 (.016)	A		

Total Length 37,9 mm (1.492), Special Designation "L"

Collar Height and Installations Height

To adjust the Installation Height, Receptacles with a Press-ring are used. The Receptacles can be inserted up to the Press-ring (i.e. acting as a collar-stop) or with the Press-ring being pressed into the mounting hole.



Mechanical Data

Working Stroke: 4,3 mm (.169)
Maximum Stroke: 6,35 mm (.250)
Spring Force at Work. Stroke: 0,8 N (2.9oz)

Materials

Plunger: Steel or BeCu, gold-plated
Barrel: Bronze, gold-plated
Spring: Steel, gold-plated
Receptacle: Nickel-Silver, gold-plated

Note:

Receptacles for Wireless Test Fixture see on page 38.

Elektrical Data

Current Rating: 2 A
R_i typical: < 20 mΩ

Mounting Hole Size

in CEM 1: ∅ 0,79-0,80 mm (.0311-.0315)
in FR 4: ∅ 0,79-0,80 mm (.0311-.0315)

Note:

The Receptacle KS-040 is available pre-wired with 1 m Wire AWG 30 (see Ordering Example)


Ordering Example

	Series	Tip Material 2 = Steel 3 = BeCu	Tip Style	Tip Diameter (1/100 mm)	Plating A = Gold	Spring Force (dN)	Collar Height (mm)	Special Designation
Test Probe with total Length 35,9 mm (1.413):	G K S	0 4 0	2 9 7	0 4 0	A	0 8	0 0	
Test Probe with total Length 37,9 mm (1.492):	G K S	0 4 0	2 9 7	0 4 0	A	0 8	0 0	L
Receptacles:	K S - 0 4 0 E 0 8		K S - 0 4 0 E 0 8 V - 3 0					

Grid:
 ≥ 1,27 mm
 ≥ 50 Mil


Installation Height: 16,0 mm (.630) / variable
Recommended Stroke: 4,3 mm (.169)

Mounting and Functional Dimensions

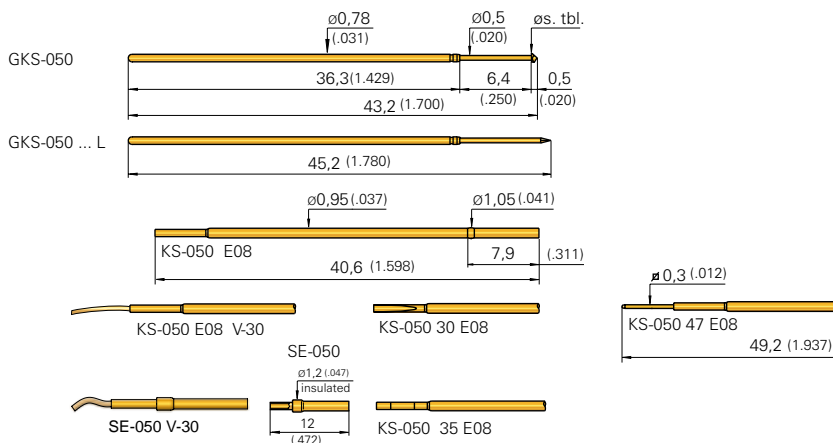

Long-stroke Test Probe GKS-015

GKS-015 307 050 A xx00

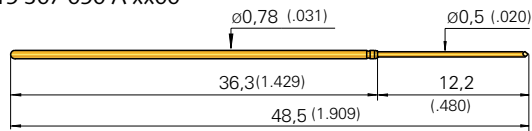


Max. Stroke: 10,0 mm (.394)
 Work.Stroke: 8,0 mm (.315)

Spring Force at Work. Stroke: 1,5 N (5.4oz)
 alternative: 1,0 N (3.6oz)

Collar Height and Installations Height

To adjust the Installation Height, Receptacles with a Press-ring are used. The Receptacles can be inserted up to the Press-ring (i.e. acting as a collar-stop) or with the Press-ring being pressed into the mounting hole.



Mechanical Data

Working Stroke: 4,3 mm (.169)
Maximum Stroke: 6,35 mm (.250)
Spring Force at Work. Stroke: 1,5 N (5.4oz)
alternative: 1,0 N (3.6oz); 2,0 N** (7.2oz)
 ** only for GKS-050

Elektrical Data

Current Rating: 2 - 3 A
R_i typical: < 20 m Ω (* < 100 m Ω)

Mounting Hole Size

in CEM 1: $\varnothing 0,96 - 0,98$ mm (.0378-.0386)
in FR 4: $\varnothing 0,97 - 0,99$ mm (.0382-.0390)

Operating Temperature

Standard: -40° up to +80° C
***with Special Designation "C":** -100° up to +200° C (2,0 N)

Materials

Plunger: BeCu or Steel, gold-plated
Barrel: Bronze, gold-plated
Spring: Steel, gold-plated or stainless Steel* (C)
Receptacle: BeCu, gold-plated

Note:
 Screw-in version see on page 126.

Tools:
 Insertion and Extraction Tools for GKS and KS see Page 118.

Available Tip Styles

Material	Tip Styles	Plating	Further Versions	
			\varnothing	\varnothing (inch)
2 01		A	$\varnothing 0,50$ (.020)	
3 02		A	$\varnothing 0,60$ (.024)	
3 03		A	$\varnothing 0,50$ (.020)	0,90 (.035)
3 05		A	$\varnothing 0,50$ (.020)	
3 06		A	$\varnothing 0,90$ (.035)	
3 07		A	$\varnothing 0,50$ (.020)	0,90 (.035)
2 14		A	$\varnothing 0,50$ (.020)	
NEW 2 22 *		A	$\varnothing 0,40$ (.016)	
2 31		A	$\varnothing 0,50$ (.020)	
2 38		A	$\varnothing 0,50$ (.020)	
2 77		A	$\varnothing 0,50$ (.020)	
2 91		A	$\varnothing 0,50$ (.020)	
2 97		A	$\varnothing 0,50$ (.020)	

* conical down to $\varnothing 0,50$ mm

Available Tip Styles Special Version GKS-050...L

Material	Tip Style	Plating	Further Versions	
			\varnothing	\varnothing (inch)
2 91		A	$\varnothing 0,50$ (.020)	

Total Length 45,2 mm (1.780), Special Designation "L"

Plug:

The Plugs SE-050 and SE-050 V-30 are to be used with the Receptacle KS 050 35 E08.

SE-050 V-30 / KS-050 E08 V-30:

The Plug and the Receptacle are pre-wired with 1 m Wire AWG 30. The connection is soldered. A piece of insulation tubing prevents shorts between the Receptacles.

Ordering Example

	Series	Tip Material 2 = Steel 3 = BeCu	Tip Style	Tip Diameter (1/100 mm)	Plating A = Gold	Spring Force (dN)	Collar Height (mm)	Special Designation ("C" "L" "LC" at Series 050)
Test Probe with total Length 43,2 mm (1.700):	GKS	050	2	91	050	A	10	00
Test Probe with total Length 45,2 mm (1.780):	GKS	050	2	91	050	A	15	00 L
Receptacles:	KS-050 E08	KS-050 30 E08	KS-050 35 E08	KS-050 E08 V-30				
Plugs:	SE-050	SE-050 V-30						

e-type® Probes
 ICT / FCT
 Bead Probes
 Fine Pitch
 Metric Stand.
 Solderable
 Short-stroke
 Flying Probes
 DKS
 SKS
 PKS / PSK
 RF / Dipole Test Probes
 HSS
 Fixture customizing
 Tools
 Cable Test Probes

GKS 075

ICT-/FCT Test Probe

Grid:

≥ 1,91 mm


≥ 75 Mil

Installation Height: 10,5/13,0/16,0 mm (.413/ .512/ .630)



Recommended Stroke: 4,3 mm (.169)

Mounting and Functional Dimensions

GKS-075

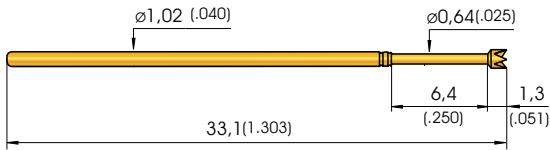

GKS-075 L



L-Version: by GKS-075 291 064 ... longer Plungers are used, by all other Tip Styles longer Barrels are used.

Mechanical Data

Working Stroke: 4,3 mm (.169)

Maximum Stroke: 6,35 mm (.250)

Spring force at Work. Stroke: 2,0 N (7,2oz)

alternative: 0,6 N (2.2oz); 1,0 N (3.6oz); 1,5 N (5.4oz); 2,8 N (10.1oz)

Operating Temperature

Standard: -40° up to +80° C

****with Special Designation "C":** -100° up to +200°C (2,0 N; 2,8 N)

C-Versions only available for GKS-075 with total length 33,1 mm (1.303).

Materials

Plunger: BeCu or Steel, gold-plated

Barrel: Nickel-Silver or Bronze, gold-plated

Spring: Steel, gold-plated or Stainless Steel** (C)

Elektrical Data

Current Rating: 3 - 4 A

R_j typical: < 20 mΩ (** < 100 mΩ)

Note:

Screw-in version see on page 128.

Available Tip Styles

Material	Tip Style	Plating	Further Versions	
			∅	∅ (inch)
0 06*		A		
2 01		A		
3 02		A		
3 03		A		
2 04		A		
3 05		A		
3 05		A		
3 06		A	1,20	(.047)
2 07		A		
NEW 2 07		A	1,20	(.047)
2 09		A		
3 13		A		
2 14		A		
2 14		A		
NEW 2 14		A	1,00	(.039)
2 17		A		

* Tip Height; 2,8 mm (.110)
Total Length 1,5 mm (.059) longer than Standard

For checking the Stroke of a Test Fixture, we recommend the usage of Stroke Measurement Probes (see page 112).

Tools:
Insertion and Extraction Tools for GKS and KS see Page 118.

Ordering Example

Series	Tip Material	Tip Style	Tip Diameter (1/100 mm)	Plating	Spring Force (dN)	Collar Height (mm)	Special Designation ("C", "L", "LC")
	0 = Delrin 2 = Steel 3 = BeCu			A = Gold			

Test Probe with total Length 33,1 mm (1.303):

G K S 0 7 5 2 9 1 0 6 4 A 2 0 0 0


Test Probe with total Length 35,1 mm (1.382):

G K S 0 7 5 2 9 1 0 6 4 A 1 5 0 0 L

Grid:
 ≥ 1,91 mm
 ≥ 75 Mil

Installation Height: 10,5/13,0/16,0 mm (.413/ .512/ .630)
Recommended Stroke: 4,3 mm (.169)

Mounting and Functional Dimensions

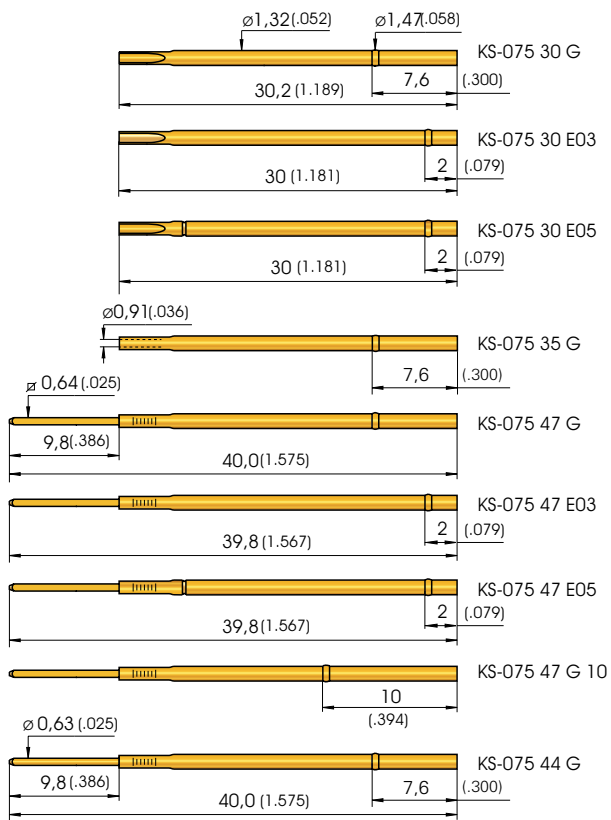

Collar Height and Installation Height


To adjust the Installation Height, Receptacles with a Press-ring are used. The Receptacles can be inserted up to the Press-ring (i.e. acting as a collar-stop) or with the Press-ring being pressed into the mounting hole. (See „Mounting hole size“ and Application example“ on this page).

Designation	GKS-075	GKS-075 ... L
KS-075 ... E03	10,5 (.413)	12,5 (.492)
KS-075 ... E05	13,0 (.512)	15,0 (.591)
KS-075 ... G	16,0 (.630)	18,0 (.709)

Mounting Hole Size

by usage of Press-ring: $\varnothing 1,36 - 1,40$ mm
 (.0535 - .0551)

by usage with Press-ring as collar: $\varnothing 1,31 - 1,32$ mm
 (.0516 - .0520)

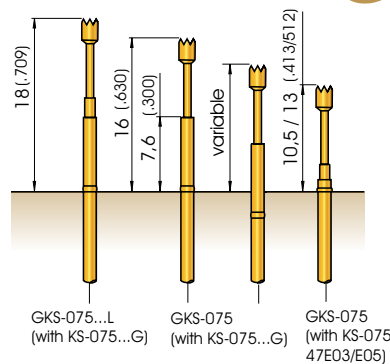

Note:
 Receptacles for Wireless Test Fixture see page 38.

Available Tip Styles

Material	Tip Style	Plating	Further Versions	
			\varnothing	\varnothing (inch)
3	19	A	1,50	(.069)
2	24 ***	A		
2	25	A	1,30	(.051)
2	31	A		
2	38	A		
3	55	A		
2	77	A		
2	88	A		
2	89	A		
2	91	A		
2	97	A		
2	97	A		
2	98	A		

Additional dimensions for tip style 55: $\varnothing 1,2$, $\varnothing 1$, 3,7, 2,54, $\varnothing 0,50$. Total Length plus 2,4 mm.

*** higher middle tip plus 0,2 mm

Ordering Example

Receptacles with Wire-Wrap Posts:

KS-075 47 E03 KS-075 47 E05 KS-075 47 G

Receptacles:

KS-075 30 G KS-075 35 G

Receptacles with Round Post:

KS-075 44 G

GKS 100

ICT-/FCT Test Probe

Grid:


≥ 2,54 mm

≥ 100 Mil

Installation Height: 10,5 - 21,0 mm (.413 - .827)

Recommended Stroke: 4,3 mm (.169)

Mounting and Functional Dimensions

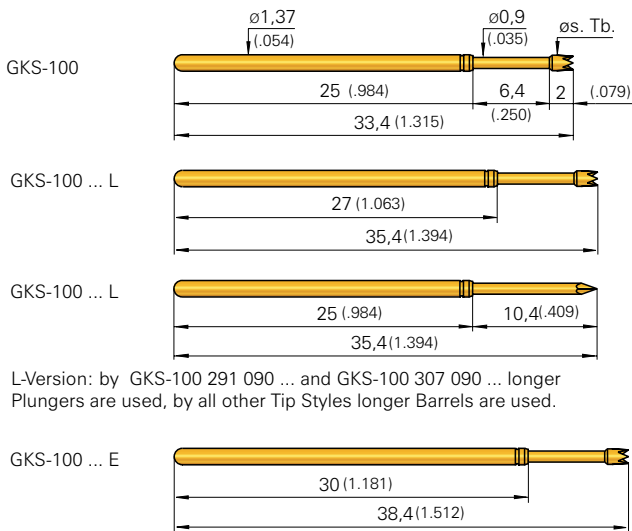

L-Version: by GKS-100 291 090 ... and GKS-100 307 090 ... longer Plungers are used, by all other Tip Styles longer Barrels are used.

Collar Height and Installations Height

To adjust the Installations Height, use Receptacles (KS) either with Collar or with Press-ring (see Usage Examples on Page 29).

Wire-Wrap	Solder Cap	GKS-100	GKS-100 ... L	GKS-100 ... E
KS-100 47 05	KS-100 30 05	10,5 (.413)	12,5 (.492)	15,5 (.610)
KS-100 47 25	KS-100 30 25	13,0 (.512)	15,0 (.591)	18,0 (.709)
KS-100 47 40	KS-100 30 40	14,5 (.571)	16,5 (.650)	19,5 (.768)
KS-100 47	KS-100 30	16,0 (.630)	18,0 (.709)	21,0 (.827)
KS-100 47 G	KS-100 30 G KS-100 44 G	16,0 (.630)/var.	18,0 (.709)/var.	21,0 (.827)/var.
KS-100 47 G12	KS-100 30 G12	20,5 (.810)/var.	22,5 (.890)/var.	25,5 (1.000)/var.

Mechanical Data

Working Stroke: 4,3 mm (.169)
Maximum Stroke: 6,35 mm (.250)
Spring Force at Work. Stroke: 2,0 N (7.2oz)
alternative: 0,6 N (2.2oz); 1,0 N (3.6oz);
 1,5 N (5.4oz); 2,25 N (8.1oz);
 3,0 N (10.8oz), 4,0 N (14,4oz)

Electrical Data

Current Rating: 5 - 8 A
R_i typical: < 20 mΩ (***) < 100 mΩ

Operating Temperature

Standard: -40° up to +80° C
*****with Special Designation "C":** -100° up to +200°C (1,5 N; 2,0 N; 3,0 N)
 C-Versions only available for GKS-100 with total length 33,4 mm (1.315).

Materials

Plunger: BeCu or Steel, gold-plated
Barrel: Nickel-Silver or Bronze, gold-plated
Spring: Steel, gold-plated or stainless steel*** (C)
Receptacle: Nickel-silver or Brass, gold-plated

Mounting Hole Size

For KS-100...G when pressing the Press-ring into the Mounting Hole in Material:
CEM 1 and FR 4: \varnothing 1,70 - 1,75 mm (.0669 - .0689)

For KS-100 with Collar or Press-ring as a collar-stop:
CEM 1: \varnothing 1,68 - 1,69 mm (.0661 - .0665)
FR 4: \varnothing 1,69 - 1,70 mm (.0665 - .0669)

Available Tip Styles

Material	Tip Style	Plating	Further Versions	
			\varnothing	\varnothing (inch)
0 06*		A		
0 06*				
2 01		A		
3 02		A	0,90	(.035)
3 03		A		
2 04**		A		
2 04		A	1,50	(.059)
3 05		A	0,50 0,64 1,30	(.020) (.025) (.051)
3 06		A	1,50 2,00 2,50 3,00	(.059) (.079) (.098) (.118)
3 07		A		
3 07		A	1,70 2,50	(.067) (.098)
2 09		A		
3 13		A		
2 14		A	0,80	(.031)
2 14**		A		
2 3 14		A	1,50	(.059)
2 17		A		
3 19		A		
2 24**		A	1,50	(.059)

* 0,9 mm or 0,5 mm longer than Standard
 ** conical down up to \varnothing 1,2 mm
 **** higher middle tip, 0,4 mm longer than Standard

Note: Receptacles for Wireless Test Fixture see on page 38.

For checking the Stroke of a Test Fixture, we recommend the usage of Stroke Measurement Probes (see page 112).

Tools: Insertion and Extraction Tools for GKS and KS see Page 118.

Grid:
 ≥ 2,54 mm
 ≥ 100 Mil


Installation Height: 10,5 - 21,0 mm (.413 - .827)
Recommended Stroke: 4,3 mm (.169)

Mounting and Functional Dimensions

Receptacles with Collar


With Wire-Wrap Posts (vacuum-sealed)

With Solder Cap **NEW**

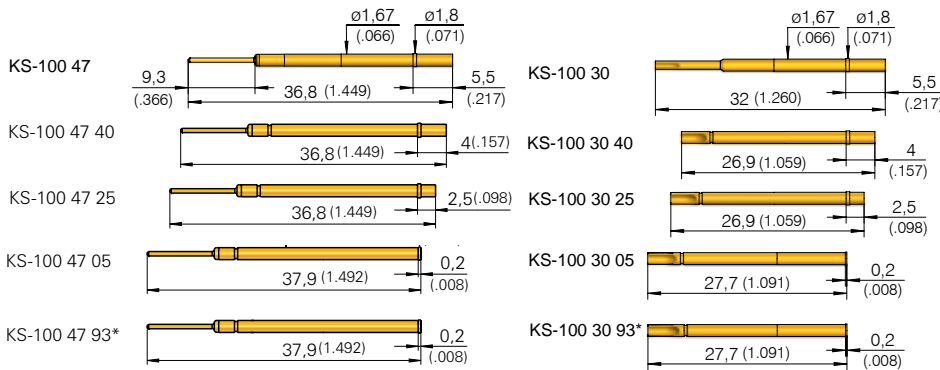


* for usage with Tip Style 93

Receptacles with Press-ring

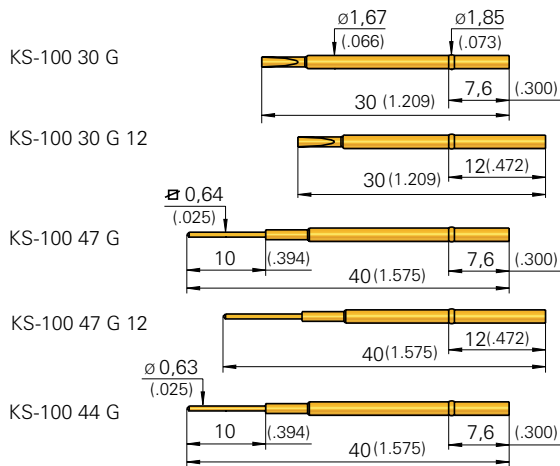

Example with GKS-100 (Total Length GKS = 33,4 (1.315))

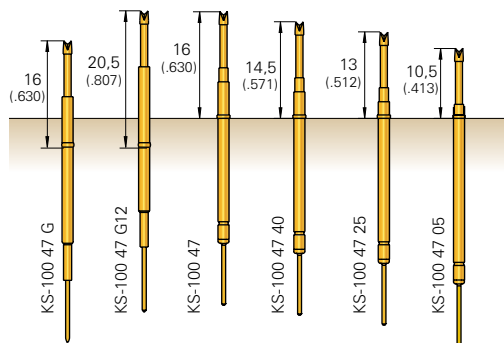

Note to GKS-100 with Tip Style 93:
 - Installation Height with KS-100 30/47: 21,0 mm (.827)
 - Installation Height with KS-100 47 93: 16,0 mm (.630)

It is recommended to use Tip Style "93" in combination with the Test Probe series "GKS-100 ...E"

Note:
 Receptacles with square-post length 13 mm (.512) and 18 mm (.709) are ordered with the Designation "-13" resp. "-18"
 Example: KS-100 47 G 12-13 (-18)
 KS-100 47-13 (-18)

Available Tip Styles

Material	Tip Style	Plating	Further Versions	
			∅	∅ (inch)
2	25	A	∅ 1,30 (.051)	1,50 (.059)
2	31	A	∅ 0,90 (.035)	
2	33	A	∅ 1,06 (.042)	
2	38	A	∅ 0,90 (.035)	
3	55	A	∅ 1,42 (max. Stroke: 4,7 mm (.185)) ∅ 1,02 3,7 2,54 ∅ 0,64 (.025)	
2	77	A	∅ 0,90 (.035)	
2	88	A	∅ 1,50 (.059)	NEW 1,90 (.070)
2	89	A	∅ 0,50 (.020)	
2	91	A	∅ 0,90 (.035)	
2	91	A	∅ 1,30 (.051)	
2	93*	A	∅ 1,60 (.063)	
2	97	A	∅ 0,90 (.035)	
2	98	A	∅ 0,90 (.035)	

* 5 mm longer as Standard

Ordering Example

Series	Tip Material	Tip Style	Tip Diameter (1/100 mm)	Plating	Spring Force (dN)	Collar Height (mm)	Special Designation („C“, „E“, „L“)
Test Probe with total Length 33,4 mm (1.315):	3 = BeCu	07	150	A = Gold	30	00	
Test Probe with total Length 35,4 mm (1.394):	2 = Steel	91	090	A = Gold	20	00	L
Test Probe with total Length 38,4 mm (1.512):	3 = BeCu	06	130	A = Gold	15	00	E
Receptacles:							

e-type® Probes
ICT / FCT
Bead Probes
Fine Pitch
Metric Stand.
Solderable
Short-stroke
Flying Probes
DKS
SKS
PKS / PSK
RF / Dipole Test Probes
HSS
Fixture customizing
Tools
Cable Test Probes

GKS 035

Long-stroke Test Probe for dual-Stage Fixtures

Grid:


≥ 1,91 mm

≥ 75 Mil


Installation Height: 14,2/16,7/19,7 mm/var. (.559/ .657/ .776)

Recommended Stroke: 8,0 mm (.315)

Mounting and Functional Dimensions

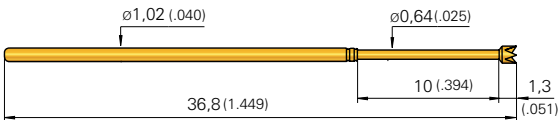


GKS-035



GKS-035 ... L

Receptacles

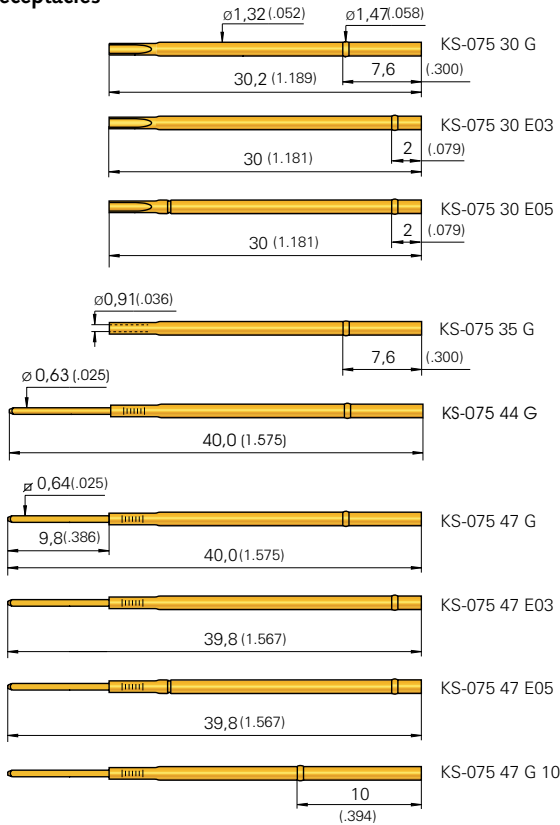

Mechanical Data

Working Stroke: 8,0 mm (.315)
Maximum Stroke: 10,0 mm (.394)
Spring Force at Work. Stroke: 1,2 N (4.3oz)

Electrical Data

Current Rating: 3 - 4 A
R_i typical: < 20 mΩ

Materials


Plunger: BeCu or Steel, gold-plated
Barrel: Nickel-Silver or Bronze, gold-plated
Spring: Steel, gold-plated
Receptacles: Nickel-Silver, gold-plated

Mounting Hole Size

see Probe series GKS-075, Page 25

Available Tip Styles

Material	Tip Style	Plating	Further Versions	
			∅	∅ (inch)
3 06		A	∅ 1,15 (.045)	
2 07		A	∅ 1,15 (.045)	
2 14		A	∅ 1,15 (.045)	0,64 (.025)
2 91		A	∅ 0,64 (.025)	



Collar Height and Installation Height

To adjust the Installation Height Receptacles with a Press-ring are used.

Designation	Installation Height
KS-075 ... E03	14,2 mm/var. (.559)
KS-075 ... E05	16,7 mm/var. (.657)
KS-075 ... G	19,7 mm/var. (.776)

Note:

For Test Probes series GKS-035 Receptacles of the series KS-075 are used (see Page 27).


Ordering Example

Series	Tip Material 2 = Steel 3 = BeCu	Tip Style	Tip Diameter (1/100 mm)	Plating A = Gold	Spring Force (dN)	Collar Height (mm)	Special Designation
Test Probe with total Length 36,8 mm (1.449):	G K S	0 3 5	2 1 4	1 1 5	A	1 2	0 0
Test Probe with total Length 38,8 mm (1.528):	G K S	0 3 5	2 9 1	0 6 4	A	1 2	0 0 L
Receptacles with Wire-Wrap post:	K S - 0 7 5 4 7 E 0 3		K S - 0 7 5 4 7 E 0 5		K S - 0 7 5 4 7 G		
Receptacles:	K S - 0 7 5 3 0 G		K S - 0 7 5 3 5 G				

Grid:
 ≥ 2,54 mm
 ≥ 100 Mil

Installation Height: 21,3 mm (.839)
Recommended Stroke: 9,3 mm (.366)

Mounting and Functional Dimensions

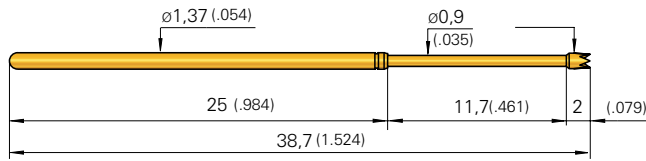


GKS-135

Collar Height and Installation Height

The Installation Height of the Test Probe is determined by the collar height of the Receptacle (KS).

Designation	Installation Height
KS-100 47 05	15,8 mm (.622)
KS-100 47 25	18,3 mm (.720)
KS-100 47 40	19,8 mm (.780)
KS-100 47 (G)	21,3 mm (.839) var.



Application example with KS - 100 47

Mechanical Data

Working Stroke: 9,3 mm (.366)
Maximum Stroke: 11,7 mm (.461)
Spring Force at Work. Stroke: 2,0 N (7.2oz)
alternative: 1,5 N (5.4oz); 3,0 N (10.8oz)

Electrical Data

Current Rating: 5 - 8 A
R_i typical: < 30 mΩ

Materials

Plunger: Steel or BeCu, gold- or nickel-plated
Barrel: Nickel-Silver or Bronze, gold-plated
Spring: Steel, gold-plated

Mounting Hole Size

see Probe series GKS-100, Page 28

Available Tip Styles

Material	Tip Style	Plating	Further Versions	
			∅	∅ (inch)
2 01		A	∅ 0,90 (.035)	
3 02		A	∅ 0,90 (.051)	
3 03		A	∅ 1,30 (.035)	
2 04		A	∅ 1,30 (.051)	
3 06		A	∅ 1,30 (.051)	
3 06		A	∅ 1,50 (.059)	
3 07		A	∅ 1,50 (.059)	2,50 (.098)
2 09*		N	∅ 0,50 (.020)	
2 14		A	∅ 0,50 (.020)	
2 14		A	∅ 1,30 (.051)	
2 14		A	∅ 1,50 (.059)	
2 25		A	∅ 1,30 (.051)	
2 91		A	∅ 0,90 (.035)	
2 97		A	∅ 0,90 (.035)	

* Installation Height with KS-100 47: 23,3 mm (.917)
 Maximum Stroke: 11,0 mm (.433)


Note:

For Test Probes series GKS-135 Receptacles of the series KS-100 are used (see Page 29).

Tools:

Insertion and Extraction Tools for GKS and KS see Page 118.

Ordering Example

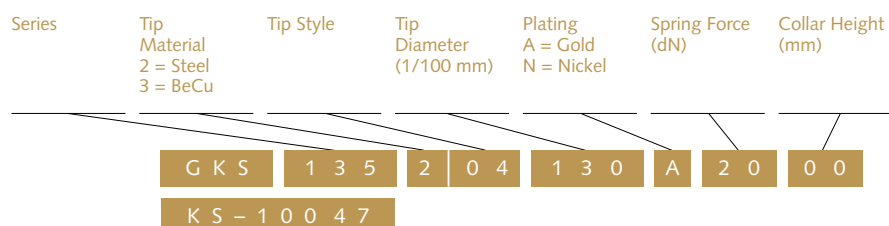

Test Probe:

Receptacle:

GKS 101

Test Probe

Grid:


≥ 1,91 mm

≥ 75 Mil

Installation Height: 12,5 mm (.492)

Recommended Stroke: 4,0 mm (.157)

Mounting and Functional Dimensions

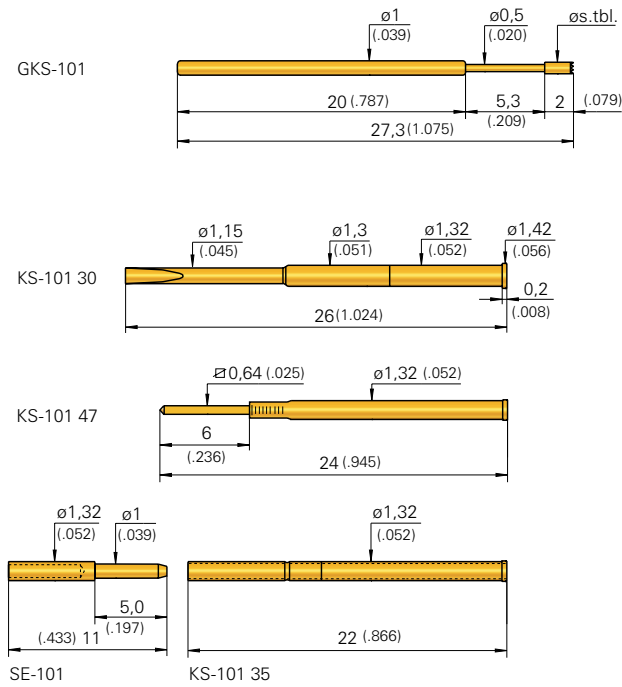


Collar Height and Installation Height

The Installation Height of the Test Probe is determined by the collar height of the Receptacle (KS).

Designation	Installation Height
KS-101 30 / 35 / 47	12,5 mm (.492)
KS-101 xx E13	14,0 mm (.551)

Further Installation Heights on request.



Available Tip Styles

Material	Tip Style	Plating	Further Versions	
			ϕ	ϕ (inch)
3	01	A		
3	02	A	0,50	(.020)
3	03	A	1,50	(.059)
3	04	A		
3	05	A		
3	06	A	1,50	(.059)
3	07	A		
3	08	A		
3	14	A		
2	24	A		
**				
3	51	A		

2 mm (.079) shorter $\phi 0,50$ (.020)

** higher middle tip plus 0,5 mm

Mechanical Data

Working Stroke: 4,0 mm (.157)
Maximum Stroke: 5,3 mm (.209)
Spring Force at Work. Stroke: 0,8 N (2.9oz)
alternative: 0,5 N (1.8oz); 1,5 N (5.4oz)

Electrical Data

Current Rating: 3 - 4 A
R_j typical: < 20 m Ω (* < 100 m Ω)

Mounting Hole Size

in CEM 1 and FR 4: ϕ 1,31 - 1,32 mm (.0516 - .0520)

Materials

Plunger: BeCu or Steel, gold-plated
Barrel: Nickel-Silver, gold-plated
Spring: Steel, gold-plated or Stainless Steel* (C)
Receptacle: Brass or Nickel-Silver, gold-plated

Operating Temperature

Standard: -40° up to +80° C
*** with spec. Designation "C":** -100° up to +200° (0,8 N)

Tools:

Insertion and Extraction Tools for GKS and KS see Page 118.


Ordering Example

	Series	Tip Material 2 = Steel 3 = BeCu	Tip Style	Tip Diameter (1/100 mm)	Plating A = Gold	Spring Force (dN)	Collar Height (mm)
Test Probe:	GKS	101	301	050	A	08	00
Receptacles:	KS-10147	KS-10135	KS-10130E13				
Plug:	SE-101						


Grid:
 ≥ 1,91 mm
 ≥ 75 Mil

Installation Height: 8,5 mm (.335)
Recommended Stroke: 2,4 mm (.094)

Mounting and Functional Dimensions

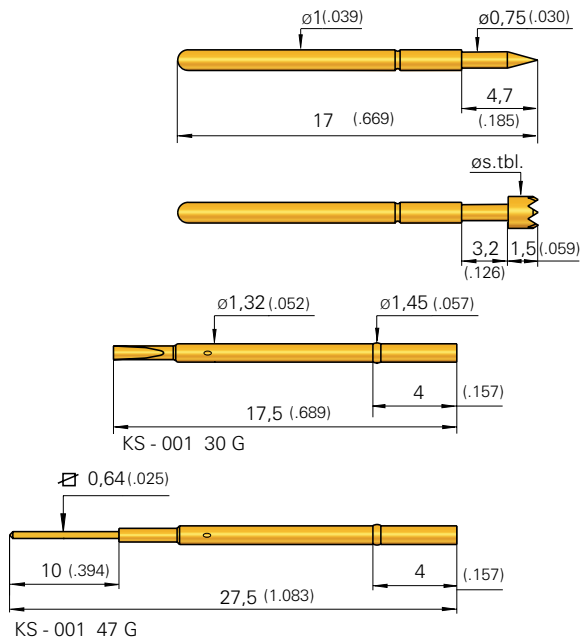

Available Tip Styles				
Material	Tip Style	Plating	Further Versions	
			ϕ	ϕ (inch)
2	01	A	$\phi 0,75$ (.030)	
3	02	A	$\phi 1,50$ (.059)	
3	03	A	$\phi 1,50$ (.059)	
2	04	A	$\phi 1,50$ (.059)	
3	05	A	$\phi 1,00$ (.039)	
3	06	A	$\phi 1,00$ (.039)	
3	06	A	$\phi 1,50$ (.059)	
3	07	A	$\phi 1,50$ (.059)	



Collar Height and Installation Height

Mechanical Data

Working Stroke: 2,4 mm (.094)
Maximum Stroke: 3,0 mm (.118)
Spring Force at Work. Stroke: 1,0 N (3.6oz)
alternative: 0,6 N (2.2oz); 1,5 N (5.4oz)

Electrical Data

Current Rating: 3 - 4 A
R_i typical: < 20 m Ω

Operating Temperature

Standard: -40° up to +80° C

Materials

Plunger: BeCu or Steel, gold-plated
Barrel: Nickel-Silver or Bronze, gold-plated
Spring: Steel, gold-plated

Mounting Hole Size

With Collar or Press-ring as a collar-stop in CEM 1 and FR 4: ϕ 1,31 - 1,32 mm (.0516 - .0520)

When pressing the Press-ring into the

Mounting Hole in CEM 1 and FR 4: ϕ 1,36 - 1,40 mm (.0535 - .0551)

Tools:

Insertion and Extraction Tools for GKS and KS see Page 118.

Ordering Example

Series	Tip Material 2 = Steel 3 = BeCu	Tip Style	Tip Diameter (1/100 mm)	Plating A = Gold	Spring Force (dN)	Collar Height (mm)
--------	---------------------------------------	-----------	----------------------------	---------------------	----------------------	-----------------------

Test Probe:

G K S 0 0 1 2 1 4 1 5 0 A 1 0 0 0

Receptacles:

K S - 0 0 1 3 0 G K S - 0 0 1 4 7 G

Grid:


≥ 2,54 mm

≥ 100 Mil

Installation Height: variable

Recommended Stroke: 2,7 mm (.106)

Mounting and Functional Dimensions

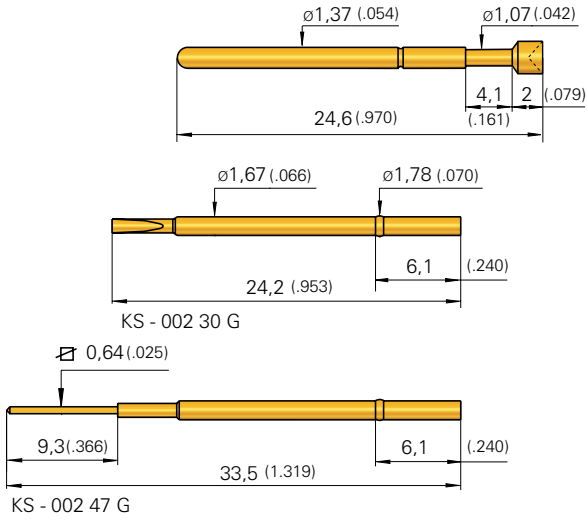


Available Tip Styles

Material	Tip Style	Plating	Further Versions	
			∅	∅ (inch)
2	01	A	∅ 1,07 (.042)	
3	03	A	∅ 1,91 (.075)	
2	04	A	∅ 1,52 (.060)	
3	05	A	∅ 0,64 (.025)	
2	06	A	∅ 1,91 (.075)	
2	07	A	∅ 1,91 (.075)	
2	14	A	∅ 1,91 (.075)	
2	17	A	∅ 1,91 (.075)	

Collar Height and Installation Height

To adjust the Installation Height, Receptacles with Press-ring (end-designation „G“) are used. The Installation Height can be variably set by assembling the Collar lower in the mounting hole.



Mechanical Data

Working Stroke: 2,7 mm (.106)
Maximum Stroke: 4,1 mm (.161)
Spring Force at Work. Stroke: 1,0 N (3.6oz)
alternative: 1,8 N (6.5oz); 2,8 N (10.1oz)

Materials

Plunger: BeCu or Steel, gold-plated
Barrel: Nickel-Silver or Bronze, gold-plated
Spring: Steel, gold-plated
Receptacle: Nickel-Silver, gold-plated

Electrical Data

Current Rating: 5 - 8 A
R_i typical: < 20 mΩ

Mounting Hole Size

With Collar or Press-ring as a collar-stop in CEM 1 and FR 4: ∅ 1,68- 1,69 mm (.0642 - .0660)

When pressing the Press-ring into the Mounting Hole

in CEM 1 and FR 4: ∅ 1,70 - 1,75 mm (.0669 - .0689)

Tools:

Insertion and Extraction Tools for GKS and KS see Page 118.



Ordering Example

	Series	Tip Material 2 = Steel 3 = BeCu	Tip Style	Tip Diameter (1/100 mm)	Plating A = Gold	Spring Force (dN)	Collar Height (mm)
Test Probe:	GKS	002	303	191	A	10	00
Receptacle with Press-ring:	KS-00230G						

Grid:
≥ 3,18 mm
≥ 125 Mil

Installation Height: variable
Recommended Stroke: 4,4 mm (.173)

Mounting and Functional Dimensions

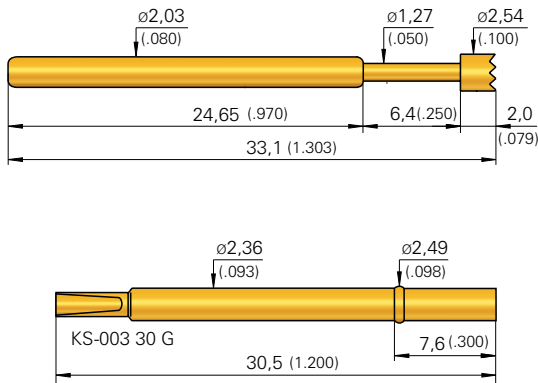

Collar Height and Installation Height

To adjust the Installation Height, Receptacles with Press-ring (end-designation „G“) are used. The Installation Height can be variably set by assembling the Collar lower in the mounting hole.

Mechanical Data

Working Stroke: 4,4 mm (.173)
Maximum Stroke: 6,35 mm (.250)
Spring Force at Work. Stroke: 2,0 N (7.2oz)
alternative: 1,2 N (4.3oz); 3,0 N (10.8oz)

Electrical Data

Current Rating: 5 - 8 A
R_i typical: < 20 mΩ

Materials

Plunger: BeCu or Steel, gold-plated
Barrel: Nickel-Silver or Bronze, gold-plated
Spring: Steel, gold-plated
Receptacle: Nickel-Silver, gold-plated

Mounting Hole Size

With Collar or Press-ring as a collar-stop in CEM 1 and FR 4: ϕ 2,33- 2,34 mm (.0901 - .0906)

When pressing the Press-ring into the Mounting Hole

in CEM 1 and FR 4: ϕ 2,39 - 2,44 mm (.0941 - .0961)

Available Tip Styles

Material	Tip Style	Plating	Further Versions	
			ϕ	ϕ (inch)
2 01		A		
3 02		A		
3 02		A		
3 03		A		
2 04		A		
3 05		A		
3 05		A		
3 05		A		
2 06		A		
3 07		A	3,00	(.118)
3 08		A		

Tools:

Insertion and Extraction Tools for GKS and KS see Page 118.

Ordering Example

Series	Tip Material 2 = Steel 3 = BeCu	Tip Style	Tip Diameter (1/100 mm)	Plating A = Gold	Spring Force (dN)	Collar Height (mm)
GKS	003	3	03	254	A	2000
Receptacle with Press-ring: KS-00330G						

Test Probe:

Receptacle with Press-ring:

GKS 004

ICT-/FCT Test Probe

Grid:


≥ 4,75 mm

≥ 187 Mil

Installation Height: variable

Recommended Stroke: 4,4 mm (.173)

Mounting and Functional Dimensions

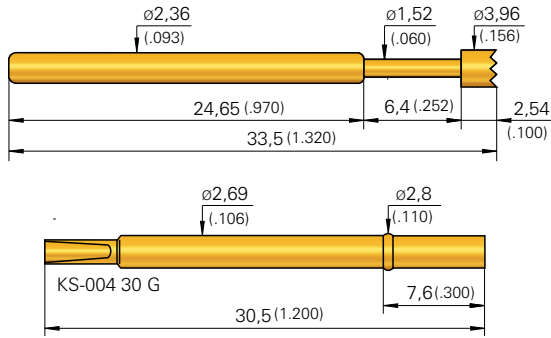


Available Tip Styles

Material	Tip Style	Plating	Further Versions	
			∅	∅ (inch)
2	01	A	∅ 1,52 (.060)	
3	02	A	∅ 3,96 (.156)	
2	03	A	∅ 3,96 (.156)	
2	04	A	∅ 1,52 (.060)	
3	05	A	∅ 1,52 (.060)	
2	06	A	∅ 3,96 (.156)	
3	08	A	∅ 3,96 (.156)	

Collar Height and Installation Height

To adjust the Installation Height, Receptacles with a Press-ring (end-designation „G“) are used. The Installation Height can be variably set by assembling the Collar lower in the mounting hole.



Mechanical Data

Working Stroke: 4,4 mm (.173)

Maximum Stroke: 6,35 mm (.250)

Spring Force at Work. Stroke: 2,0 N (7.2oz)

alternative: 1,5 N (5.4oz); 3,0 N (10.8oz)

Materials

Plunger: Steel, gold-plated

Barrel: Nickel-Silver or Bronze, gold-plated

Spring: Steel, gold-plated

Receptacle: Nickel-Silver, gold-plated

Electrical Data

Current Rating: 6 - 8 A

R_j typical: < 20 mΩ

Mounting Hole Size

With Collar or Press-ring as a collar-stop

in CEM 1 and FR 4: ∅ 2,67 - 2,68 mm (.1024 - .1063)

When pressing the Press-ring into the Mounting Hole

KS-004 30 G: ∅ 2,72 - 2,77 mm (.1071 - .1091)

Tools:

Insertion and Extraction Tools for GKS and KS see Page 118.

Ordering Example

Series	Tip Material 2 = Steel 3 = BeCu	Tip Style	Tip Diameter (1/100 mm)	Plating A = Gold	Spring Force (dN)	Collar Height (mm)
--------	---------------------------------------	-----------	----------------------------	---------------------	----------------------	-----------------------

Test Probe:


G K S 0 0 4 2 0 1 1 5 2 A 2 0 0 0

Receptacle with Press-ring:

K S - 0 0 4 3 0 G


Grid:
 ≥ 4,75 mm
 ≥ 187 Mil
Installation Height: variable
Recommended Stroke: 4,4 mm (.173)

Mounting and Functional Dimensions

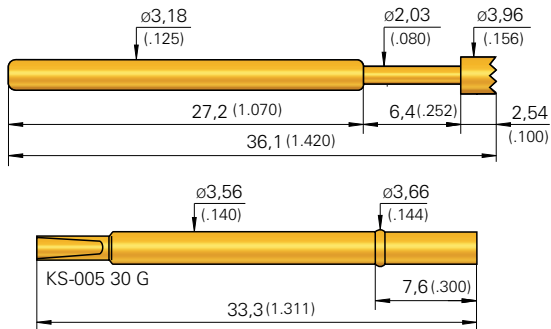

Available Tip Styles				
Material	Tip Style	Plating	Further Versions	
			∅	∅ (inch)
2 01		A	∅ 2,03 (.080)	
2 03		A	∅ 3,96 (.156)	
2 06		A	∅ 3,96 (.156)	

Collar Height and Installation Height
 To adjust the Installation Height, Receptacles with a Press-ring (end-designation „G“) are used. The Installation Height can be variably set by assembling the Collar lower in the mounting hole.



Mechanical Data
Working Stroke: 4,4 mm (.173)
Maximum Stroke: 6,35 mm (.250)
Spring Force at Work. Stroke: 2,0 N (7.2oz)
alternative: 3,0 N (10,8oz); 5,0 N (18.1oz)

Materials
Plunger: Steel, gold-plated
Barrel: Nickel-Silver or Bronze, gold-plated
Spring: Steel, gold-plated
Receptacle: Nickel-Silver, gold-plated

Electrical Data
Current Rating: 6 - 8 A
R_i typical: < 20 mΩ

Mounting Hole Size
With Collar or Press-ring as a collar-stop in CEM 1 and FR 4: ∅ 3,53- 3,54 mm (.1378 - .1399)

When pressing the Press-ring into the Mounting Hole
KS-005 30 G: ∅ 3,58 - 3,63 mm (.1409 - .1429)

Tools:
 Insertion and Extraction Tools for GKS and KS see Page 118.

Ordering Example

Series	Tip Material	Tip Style	Tip Diameter	Plating	Spring Force	Collar Height
	2 = Steel		(1/100 mm)	A = Gold	(dN)	(mm)

Test Probe:

G K S 0 0 5 2 0 6 3 9 6 A 3 0 0 0

Receptacle with Press-ring:

K S - 0 0 5 3 0 G

e-type® Probes
 ICT / FCT
 Bead Probes
 Fine Pitch
 Metric Stand.
 Solderable
 Short-stroke
 Flying Probes
 DKS
 SKS
 PKS / PSK
 RF / Dipole Test Probes
 HSS
 Fixture customizing
 Tools
 Cable Test Probes

KS WL / GKS-550

Wireless Receptacles
Spring Loaded Receptacles

Grid:


≥ 1.00 / 1,27 / 1,91 / 2,54 mm
≥ 40 / 50 / 75 / 100 Mil

Installation Height: 16,0 mm (.630) / variable

Recommended Stroke: 2,5 mm (.098)

Mounting and Functional Dimensions

Wireless Receptacles

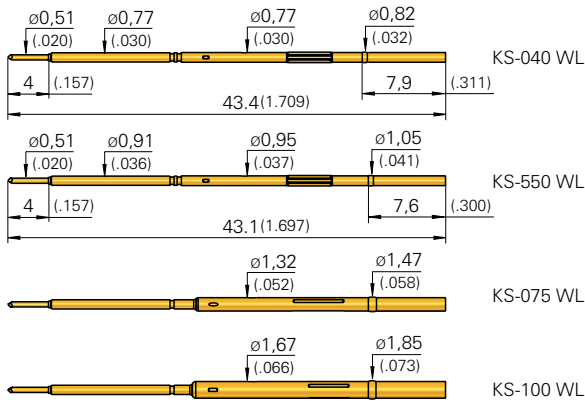



GKS-550

With KS-550 WL the Probe Series GKS-550 is used.

Available Tip Styles and Materials: see GKS-050 on page 25

Mechanical Data GKS-550

Working Stroke: 4,3 mm (.169)
Maximum Stroke: 6,35 mm (.250)
Spring Force at Work. Stroke: 1,5 N (5.4oz)
alternative: 1,0 N (3.6oz)

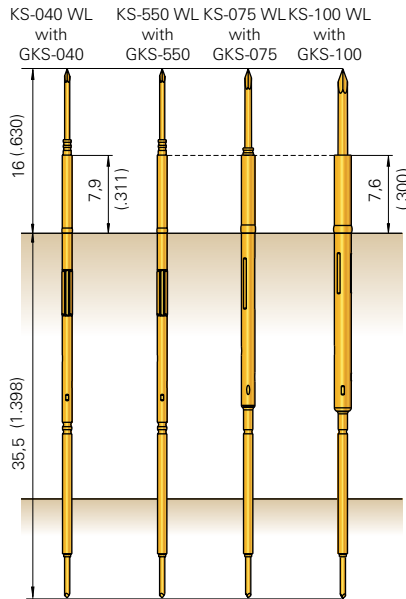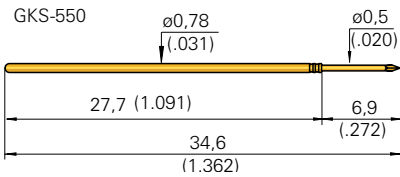

Collar Height and Installation Height

To adjust the Installation Height, Receptacles with a Press-ring are used. The Receptacles can be inserted up to the Press-ring (i.e. acting as a collar-stop) or with the Press-ring being pressed into the mounting hole.

Materials

Plunger: BeCu, gold-plated
Ball: Steel, gold-plated
Spring: Steel, gold-plated
Receptacle: Nickel-silver, gold-plated

Available Tip Styles

Plunger in Receptacle

Material	Tip Style	Plating	Further Versions	
			\varnothing	\varnothing (inch)
3	07	A		

Mechanical Data

Working Stroke: 2,5 mm (.098)
Maximum Stroke: 4,0 mm (.157)
Spring Force at Work. Stroke: 1,0 N (3.6oz)
Pre-load: 0,6 N (2.2oz)
Pre-load KS-040 WL: 0,5 N (1.8oz)
Recommended Guide Plate Hole:
KS-040: $\varnothing 0,81-0,85$ mm (.032 - .033)
KS-050, 075, 100: $\varnothing 0,96-0,99$ mm (.036 - .039)

Electrical Data

Current Rating: 2 - 3 A
R_i typical: < 20 m Ω

Operating Temperature

Standard: -40° up to +80° C

Mounting Hole Sizes

KS-040 WL

by usage of Press-ring or by usage of Press-ring as a collar:

in CEM 1: $\varnothing 0,79-0,80$ mm (.0311-.0315)

in FR 4: $\varnothing 0,79-0,80$ mm (.0311-.0315)

KS-550 WL

by usage of Press-ring or by usage of Press-ring as a collar:

in CEM 1: $\varnothing 0,96-0,98$ mm (.0378 - .0386)

in FR 4: $\varnothing 0,97-0,99$ mm (.0382 - .0390)

KS-075 WL

by usage of Press-ring in:

CEM1/FR4: $\varnothing 1,36-1,40$ mm (.0535-.0551)

by usage of Press-ring as a collar in:

CEM1/FR4: $\varnothing 1,31-1,32$ mm (.0516-.0520)

KS-100 WL

by usage of Press-ring in:

CEM1/FR4: $\varnothing 1,70-1,75$ mm (.0669-.0689)

by usage of Press-ring as a collar:

in CEM 1: $\varnothing 1,68-1,69$ mm (.0661-.0665)

in FR 4: $\varnothing 1,69-1,70$ mm (.0665-.0669)

Tools:

Insertion and Extraction Tools for GKS and KS see Page 118.

Ordering Example

	Series	Tip Material 2 = Steel 3 = BeCu	Tip Style	Tip Diameter (1/100 mm)	Plating A = Gold	Spring Force (dN)	Collar Height (mm)
Test Probe for KS 550 WL:	G K S	2	5 5 0	9 1	A	1 5	0 0
Receptacle for Grid 1,00 mm (40 Mil):	K S - 0 4 0 W L		Test Probes see GKS-040 Page 24				
Receptacle for Grid 1,27 mm (50 Mil):	K S - 5 5 0 W L		Test Probes see GKS-550 above				
Receptacle for Grid 1,91 mm (75 Mil):	K S - 0 7 5 W L		Test Probes see GKS-075 Page 26/27				
Receptacle for Grid 2,54 mm (100 Mil):	K S - 1 0 0 W L		Test Probes see GKS-100 Page 28/29				

The matching Tip-style for your Bead

For Bead Probe Technology – by which small beads of solder can be directly applied onto conductors or onto μ Vias – INGUN has developed special tip-styles in close cooperation with global customers. INGUN has therefore the world's largest assortment of tip-style variants for the ideal contacting of the Beads.


Experience has shown that there is a multiple of different Bead geometries, compositions and surfaces, which need to be contacted.

For this reason, apart from the flat tip-style (# 02) in various diameters, the fine-serrated tip-style (# 60) and the tip-style # 79, with a number of contacting knife-shaped edges have been developed. The fine-serrated tip-style (# 60) is available in a number of tip-diameters and pitches of the points from 0.15 to 0.25 mm. Furthermore, the new star-type tip-style # 79 is available with various tip-diameters and a number of knife-shaped edges and their related angles.




The **Tip-style 02** – flat - is preferably used for flux-free and/or small Beads.

The **Tip-style 60** – fine-serrated – is recommended (due to the fine, aggressive points) for breaking open the surfaces of the Beads, which are coated with flux-deposits as well as for suitably large enough Beads. Decisive for the choice of this tip-style is the matching up of the pitch of the points of the tip in relation to the size of the Bead.




Good matching up of the pitch of the points in relation to size of Bead



Poor matching up of the pitch of the points in relation to size of Bead



The **Tip-style 79** – Star - is recommended (due to the self-cleaning, horizontal arrangement of the knife-type edges) for "elongated/small" and "large" Beads with flux-deposits, that can stick to the tip. Decisive for the choice of the tip-style # 79 is the matching up of the Bead geometry and the angle of the knife-shaped edges as well as the most suitable contacting area (Note: usage of guide-plate in the Fixture is recommended).



Good matching up of contacting area and length of Bead.



Poor matching up of contacting area and angle of knife-edges too large for length of Bead.

The INGUN Bead Probes are 100% compatible to the standard series GKS-050/075/100/135. Therefore all their related Receptacles and Tools can be used without exception.

You can find more information about Bead Probes under www.ingun.com in the Flyer "Bead Probe Contacting".

Bead Probes

GKS-050	NEW	40
GKS-075	NEW	40
GKS-100	NEW	40
GKS-135	NEW	40

GKS 050/075/100/135

Bead Probes

NEW

Grid:

≥ 1,27 / 1,91 / 2,54 mm




≥ 50 / 75 / 100 Mil

Installation Height: 16 mm (.630) / variable


Recommended Stroke: 4,3 mm (.169)

Mounting and Functional Dimensions

ICT-/FCT Test Probes

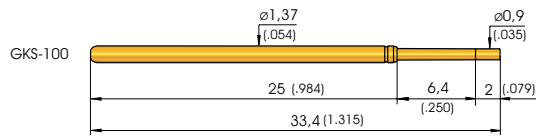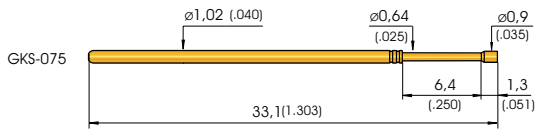

Long-stroke Test Probe for dual-Stage Fixtures

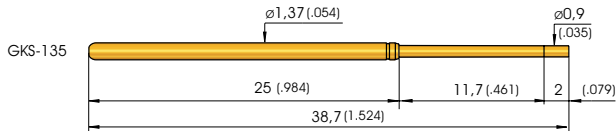

Available Tip Styles GKS-050			
Material	Tip Style	Ø (inch)	Plating
3	02	Ø 0,60 (.024)	A
3	60	Ø 0,50 (.020)	A

Available Tip Styles GKS-050			
Material	Tip Style	Ø (inch)	Plating
3	60	Ø 0,60 (.024)	A
3	60	Ø 0,90 (.035)	A
3	79	Ø 0,50 (.020)	A

Available Tip Styles GKS-075			
Material	Tip Style	Ø (inch)	Plating
3	02	Ø 0,90 (.035)	A
3	60	Ø 0,64 (.025)	A

Available Tip Styles GKS-075			
Material	Tip Style	Ø (inch)	Plating
3	60	Ø 0,90 (.035)	A
3	79	Ø 0,64 (.025)	A

Available Tip Styles GKS-100			
Material	Tip Style	Ø (inch)	Plating
3	02	Ø 0,90 (.035)	A
3	02	Ø 1,50 (.060)	A

Available Tip Styles GKS-100			
Material	Tip Style	Ø (inch)	Plating
3	60	Ø 0,64 (.025)	A
3	60	Ø 0,90 (.035)	A
3	79	Ø 0,90 (.035)	A

Available Tip Styles GKS-135			
Material	Tip Style	Ø (inch)	Plating
3	02	Ø 0,90 (.035)	A
3	60	Ø 0,90 (.035)	A

Available Tip Styles GKS-135			
Material	Tip Style	Ø (inch)	Plating
3	79	Ø 0,64 (.025)	A

Mechanical Data

Work. Stroke: 050/075/100 4,3 mm (.169)

Max. Stroke: 050/075/100 6,35 mm (.250)

Work. Stroke: 135 9,3 mm (.366)

Max. Stroke: 135 11,35 mm (.448)

Materials

Plunger: BeCu, gold-plated

Barrel: Nickel-silver or Bronze, gold-plated

Spring: Steel, gold-plated

Receptacle: Nickel-silver or Brass, gold-plated

Spring Force of GKS-050:

Spring Force at Work. Stroke: 1,5 N (5.4oz)

alternative: 1,0 N (3.6oz); 2,0 N (7.2oz)

Spring Force of GKS-100:

Spring Force at Work. Stroke: 1,5 N (3.6oz)

alternative: 2,0 N (7.2oz); 3,0 N (10.8oz)

Spring Force of GKS-075:

Spring Force at Work. Stroke: 1,5 N (5.4oz)

alternative: 1,0 N (3.6oz); 2,0 N (7.2oz)
2,8 N (10.1oz)

Spring Force of GKS-135:

Spring Force at Work. Stroke: 1,5 N (5.4oz)

alternative: 2,0 N (7.2oz); 3,0 N (10.8oz)

Note:
Collar Height and Installation Height, Receptacles, Electrical Data, Mounting Hole Size: see compatible standard Probe Series.

Tools:
Insertion and Extraction Tools for GKS and KS see Page 118.

Ordering Example

Series	Tip Material 3 = BeCu	Tip Style	Tip Diameter (1/100 mm)	Plating A = Gold N = Nickel	Spring Force (dN)	Collar Height (mm)
G K S	0 5 0	3	6 0	0 6 0	A	1 5 0 0
G K S	0 7 5	3	6 0	0 9 0	A	2 0 0 0
G K S	1 0 0	3	6 0	0 9 0	A	2 0 0 0
G K S	1 3 5	3	6 0	0 9 0	A	2 0 0 0

Test Probes:


Fine Pitch

For Fine Pitch applications it must be decided whether the Test Probe is used with a Receptacle or not. If the Test Probe is used with a Receptacle, then the Test Probe is changed in the common way from above, without removing the electrical connection. To avoid the time-consuming and costly wiring of the Receptacles in the case of Fine-Pitch applications, however, then the use of pre-wired Receptacles is preferred.

When using Test Probes with a plug, then use of a Receptacle is no longer necessary. Subsequently, the Test Probes can be used in a smaller pitch. The plugs are normally pressed or glued into a mounting plate. The Test Probes are float-mounted in a guide plate and are then centered and secured by means of a mounting plate.

This method of customizing has the following advantages:

- Contacting smaller Pads
- Reduced wobble of the Test Probe due to close guidance of the mounting plate.
- Usage in grids smaller than when using Receptacles.
- Sandwich design of the Fixture is possible.
- Larger bore-hole tolerances of the guide plate are allowed.

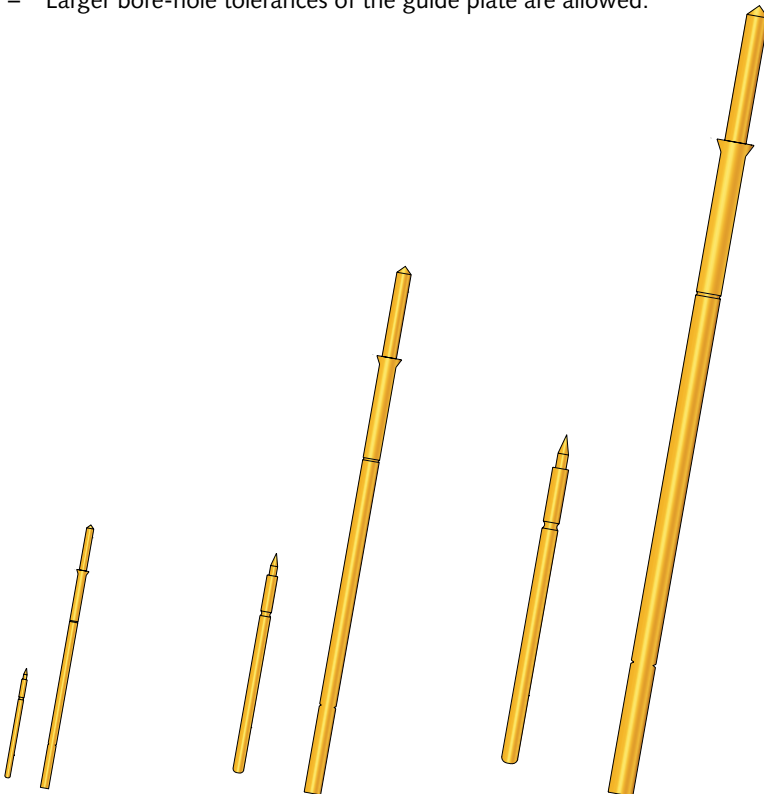

Fine Pitch (≤1,27 mm)

GKS-038	42
GKS-041	42
GKS-061	42
GKS-080	43
GKS-081	44
GKS-069	45
GKS-079	46
GKS-181	47

GKS 038/GKS 041/GKS 061

Micro-Contacting

Grid:


≥ 0,635 mm

≥ 25 Mil

Installation Height: 4,0 mm (.157)

Recommended Stroke: 2,0 mm (.079)

GKS 038

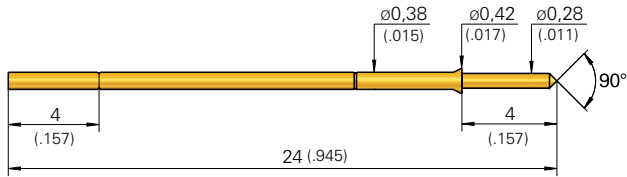


pre-wired Version with Wire AWG 30: see Example below

Available Tip Styles

Material	Tip Style	Plating	Further Versions	
			∅	∅ (inch)
3 02		A		
3 08		A		

GKS 041

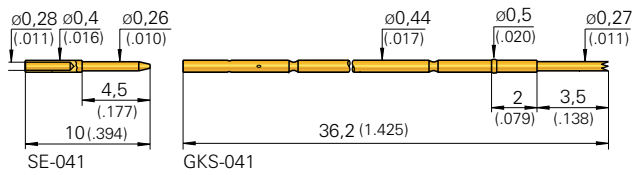

Grid:

≥ 0,7 mm

≥ 28 Mil


Installation Height: 5,5 mm (.217)

Recommended Stroke: 2,5 mm (.098)

Available Tip Styles

Material	Tip Style	Plating	Further Versions	
			∅	∅ (inch)
3 04		A		

GKS 061

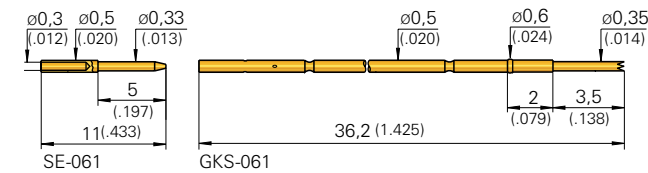

Grid:

≥ 0,8 mm

≥ 30 Mil

Installation Height: 5,5 mm (.217)

Recommended Stroke: 2,5 mm (.098)

Available Tip Styles

Material	Tip Style	Plating	Further Versions	
			∅	∅ (inch)
3 04		A		

Mechanical Data	GKS 038	GKS 041	GKS 061
Working Stroke:	2,0 mm (.079)	2,5 mm (.098)	2,5 mm (.098)
Maximum Stroke:	2,5 mm (.098)	3,5 mm (.138)	3,5 mm (.138)
Spring Force at Work.Stroke:	0,4 N (1.4oz)	0,4 N (1.4oz)	0,6 N (2.2oz)

Electrical Data	GKS 038	GKS 041	GKS 061
Current Rating:	1 A	2 A	2 A
R_i typical:	< 100 mΩ	< 50 mΩ	< 50 mΩ

Mounting Hole Size	GKS 038	GKS 041	GKS 061
	∅ 0,38 mm (.0150)	∅ 0,44 mm (.0173)	∅ 0,5 mm (.0197)

Materials	
Plunger:	BeCu, gold-plated
Barrel:	Bronze, gold-plated
Spring:	Steel, gold-plated
Plug:	Brass, gold-plated

Note:
This Test Probe is available pre-wired with 1 m Wire AWG 30: see Ordering Example.

Ordering Example


	Series	Tip Material 3 = BeCu	Tip Style	Tip Diameter (1/100 mm)	Plating A = Gold	Spring Force (dN)	Collar Height (mm)	Special Designation
Test Probe:	G K S	0 3 8	3	0 8	0 2 8	A	0 4	0 0
Test Probe (pre-wired with AWG 30):	G K S	0 3 8	3	0 8	0 2 8	A	0 4	0 0 V
Test Probe:	G K S	0 4 1	3	0 4	0 2 7	A	0 4	0 2
Test Probe:	G K S	0 6 1	3	0 4	0 3 5	A	0 6	0 2
Plugs for direct connection to GKS:	S E - 0 4 1	S E - 0 6 1						

Grid:
 ≥ 1,00 mm
 ≥ 40 Mil





Installation Height: 10,5 mm (.413)
 Recommended Stroke: 3,0 mm (.118)

Mounting and Functional Dimensions

without Receptacle

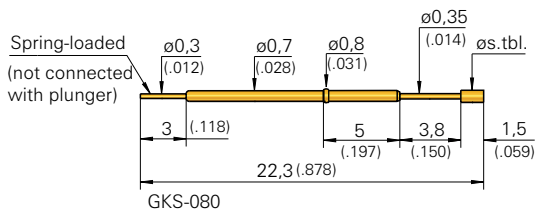

with Receptacle

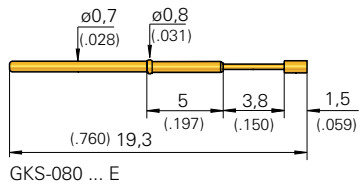

Collar Height and Installation Height

The Installation Height of the Tip (Dimension without KS) is defined by the Collar Height of the Test Probe.

Collar Height 05:
 Installation Height 10,3 mm (.405)
 (without Receptacle)

Mechanical Data

Working Stroke: 3,0 mm (.118)
Maximum Stroke: 3,8 mm (.150)
Spring Force at Work. Stroke: 0,8 N (2.9oz)

Materials

Plunger: BeCu, gold-plated
Barrel: Brass, gold-plated
Spring: Steel, gold-plated
Receptacle: Brass, gold-plated

Note:

When using Receptacles choose Probe version GKS-080 ... E (Version without Solder-cup).

The Receptacle can be used from Grid 1,27 (50 Mil) up.

Electrical Data

Current Rating: 3 A
R_i typical: < 20 mΩ

Mounting Hole Size

with Receptacle: ø 0,99 - 1,00 mm (.039 - .0394)
without Receptacle: ø 0,70 mm (.0276)

Tools:

Insertion and Extraction Tools for GKS and KS see Page 118.

Ordering Example

Series	Tip Material 3 = BeCu	Tip Style	Tip Diameter (1/100 mm)	Plating A = Gold	Spring Force (dN)	Collar Height (mm)	Special Designation („E“)
Test Probe:	G K S	0 8 0	3	0 1	0 3 5	A	0 8 0 5
Receptacle:	K S - 0 8 0						
Plug for Receptacle:	S E - 1 1 1						

GKS 081

Test Probe for contacting in SMD-Technology

Grid:

≥ 1,00 mm


≥ 40 Mil

Installation Height: 10,5/13,0/16,0 mm (.413/ .512/ .630)


Recommended Stroke: 5,5 mm (.217)

Mounting and Functional Dimensions

without Receptacle

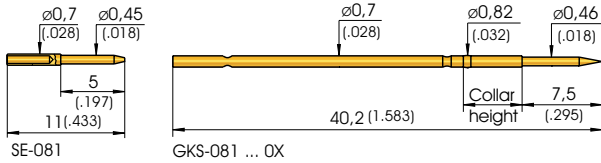

with Receptacle

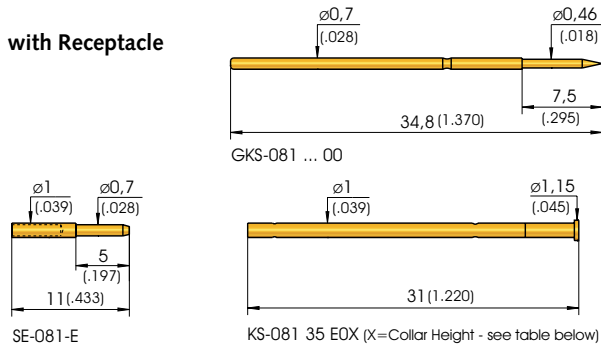


Available Tip Styles

Material	Tip Style	Plating	Further Versions	
			∅	∅ (inch)
3	51	A	∅ 0,50 (.020)	
3	54	A	∅ 0,50 (.020)	
2	91	A	∅ 0,50 (.020)	

Collar Height and Installation Height

To adjust the Installation Height of the Test Probes, Receptacles with various Collar Height are available.

Collar Height	Installation Height
03	10,5 mm (.413)
05	13,0 mm (.512)
08	16,0 mm (.630)



Mechanical Data

Working Stroke: 5,5 mm (.217)

Maximum Stroke: 7,5 mm (.295)

Spring Force at Work. Stroke: 0,8 N (2.9oz)

Materials

Plunger: BeCu or Steel, gold-plated

Barrel: Brass, gold-plated

Spring: Steel, gold-plated

Receptacle: Brass, gold-plated

Note:

The Receptacle can be used from Grid 1,27 (50 Mil) up.

Electrical Data

Current Rating: 3 A

R_j typical: < 30 mΩ

Mounting Hole Size

with Receptacle: ∅ 0,99 - 1,00 mm (.039 - .0394)

without Receptacle: ∅ 0,70 mm (.0276)

Tools:

Insertion and Extraction Tools for GKS and KS see Page 118.

Ordering Example

Series	Tip Material 2 = Steel 3 = BeCu	Tip Style	Tip Diameter (1/100 mm)	Plating A = Gold	Spring Force (dN)	Collar Height (mm)
--------	---------------------------------------	-----------	----------------------------	---------------------	----------------------	-----------------------

Test Probe for usage **without** Receptacle:

G K S 0 8 1 3 5 4 0 5 0 A 0 8 0 3

Test Probe for usage **with** Receptacle:

G K S 0 8 1 3 5 4 0 5 0 A 0 8 0 0

Receptacles:

K S - 0 8 1 3 5 E 0 3 K S - 0 8 1 3 5 E 0 5 K S - 0 8 1 3 5 E 0 8

Plug for direct connection to Probe (GKS):

S E - 0 8 1


Plug for Receptacle:

S E - 0 8 1 E

Grid:
 ≥ 1,27 mm
 ≥ 50 Mil

Installation Height: 6,7 mm (.264) / variable
Recommended Stroke: 2,2 mm (.087)


Mounting and Functional Dimensions

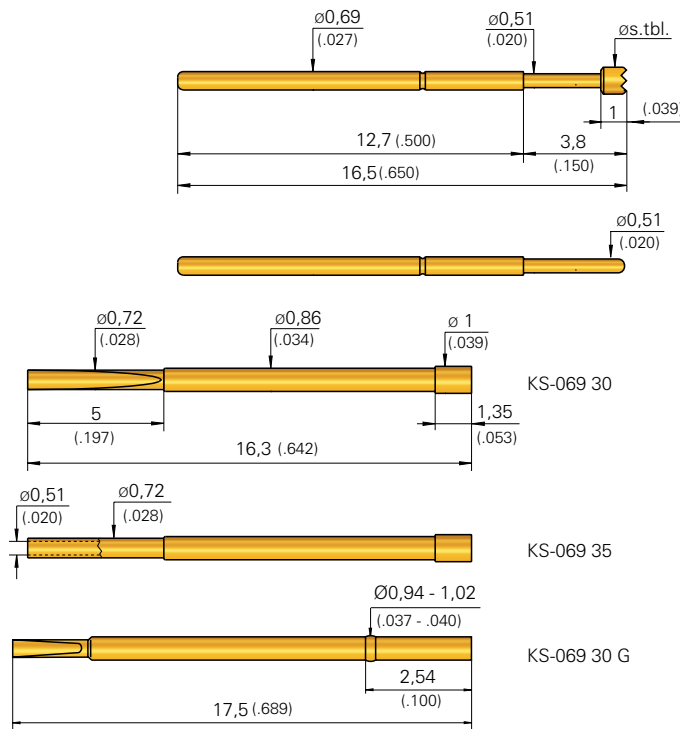

Collar Height and Installation Height

The Installation Height of the Probe is determined by the Receptacle.

Designation	Installation Height
KS-069 30	6,7 mm (.264)
KS-069 35	6,7 mm (.264)
KS-069 30 G	variable



Mechanical Data

Working Stroke: 2,2 mm (.087)
Maximum Stroke: 2,8 mm (.110)
Spring Force at Work. Stroke: 0,7 N (2.5oz)
alternative: 1,0 N (3.6oz)

Materials

Plunger: BeCu or Steel, gold-plated or chemically nickel-plated
Barrel: Nickel-Silver, gold-plated
Spring: Steel, gold-plated
Receptacle: Brass or Nickel-Silver, gold-plated

Electrical Data

Current Rating: 3 A
R_i typical: < 20 mΩ

Mounting Hole Size

for KS-069 30 / 35: $\varnothing 0,85 - 0,86$ mm (.0335 - .0339)
for KS-069 30 G: $\varnothing 0,86 - 0,92$ mm (.0339 - .0362)

		Available Tip Styles			
Material	Tip Style	Plating	Further Versions		
			\varnothing	\varnothing (inch)	
2	01	N	$\varnothing 0,51$ (.020)	0,51 A (.020)	
3	03	A	$\varnothing 0,90$ (.035)	1,52 (.060)	
2	05	N	$\varnothing 0,51$ (.020)		
3	05	A	$\varnothing 0,51$ (.020)		
3	05	A	$\varnothing 0,80$ (.031)		
3	06	A	$\varnothing 0,90$ (.035)		
3	07	A	$\varnothing 0,90$ (.035)		
2	14	A	$\varnothing 0,90$ (.035)		
2	17	A	$\varnothing 0,90$ (.035)		

Note:

The usage of the Series 069 is only possible with a Receptacle.

The KS-069 is available pre-wired with 1 m Wire AWG 26 (see Ordering Example).

Note:

Test Probes of the Series GKS-069 are also available with bent Barrel end (Special Designation „B“)

Tools:

Insertion and Extraction Tools for GKS and KS see Page 118.

Ordering Example

Series	Tip Material 2 = Steel 3 = BeCu	Tip Style	Tip Diameter (1/100 mm)	Plating A = Gold N = Nickel	Spring Force (dN)	Collar Height (mm)	Special Designation („B“)
Test Probe:	G K S	0 6 9	3	0 6	0 9 0	A	0 7 0 0
Receptacles:	K S - 0 6 9 3 0	K S - 0 6 9 3 5	K S - 0 6 9 3 0 G				
Receptacle, pre-wired with AWG 26:	K S - 0 6 9 3 5	V - 2 6					

e-type® Probes
 ICT / FCT
 Bead Probes
 Fine Pitch
 Metric Stand.
 Solderable
 Short-stroke
 Flying Probes
 DKS
 SKS
 PKS / PSK
 RF / Dipole Test Probes
 HSS
 Fixture customizing
 Tools
 Cable Test Probes

GKS 079

Short-Stroke Test Probe

Grid:





≥ 1,27 mm

≥ 50 Mil

Installation Height: 3,2 mm (.126)

Recommended Stroke: 1,0 mm (.039)


Mounting and Functional Dimensions

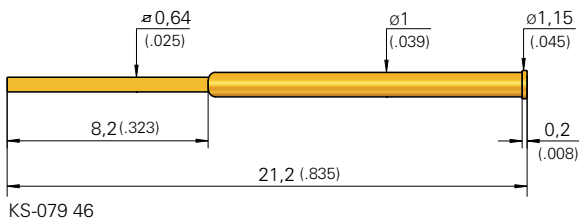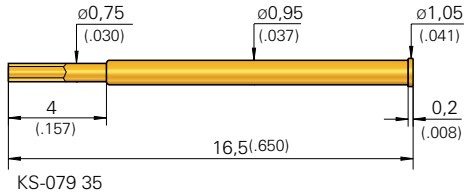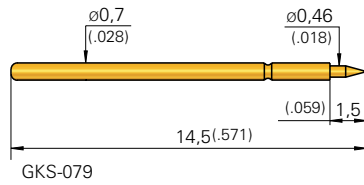

Collar Height and Installation Height

The Installation Height with KS-079 is:
3,2 mm (.126)

Available Tip Styles

Material	Tip Style	Plating	Further Versions	
			∅	∅ (inch)
ω 01		A	∅ 0,50 (.020)	

Mechanical Data

Working Stroke: 1,0 mm (.039)
Maximum Stroke: 1,2 mm (.047)
Spring Force at Work. Stroke: 1,3 N (4.7oz)

Materials

Plunger: BeCu, gold-plated
Barrel: Bronze, gold-plated
Spring: Steel, gold-plated
Receptacle: Brass, gold-plated

Electrical Data

Current Rating: 3 A
R_i typical: < 20 mΩ

Mounting Hole Size

KS-079 35
in CEM 1 and FR 4: ∅ 0,94 - 0,95 mm
 (.0370 - .0374)
KS-079 46
in CEM 1 and FR 4: ∅ 0,99 - 1,00 mm
 (.0390 - .0394)

Note:

The KS-079 is available pre-wired with 1 m Wire AWG 26 (see Ordering Example).

Ordering Example

Series	Tip Material 3 = BeCu	Tip Style	Tip Diameter (1/100 mm)	Plating A = Gold	Spring Force (dN)	Collar Height (mm)
--------	--------------------------	-----------	----------------------------	---------------------	----------------------	-----------------------

Test Probe:

G K S 0 7 9 3 0 1 0 5 0 A 1 3 0 0

Receptacle:

K S - 0 7 9 3 5

Receptacle with Wire-Wrap:

K S - 0 7 9 4 6

Receptacle, pre-wired with AWG 26:

K S - 0 7 9 3 5 V - 2 6

Grid:

≥ 1,27 mm


≥ 50 Mil

Installation Height: 10,5/13,0/16,0 mm (.413/ .512/ .630)


Recommended Stroke: 5,5 mm (.217)

Mounting and Functional Dimensions

without Receptacle

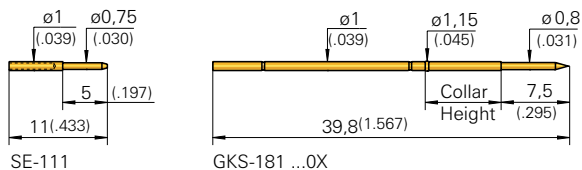


with Receptacle

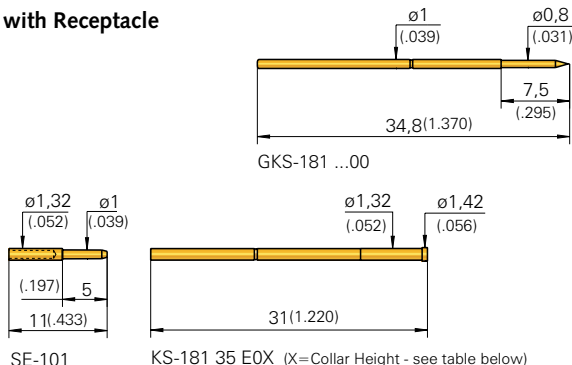

Collar Height and Installation Height

To adjust the Installation Height of the Test Probes, Receptacles with various collar heights are available.

Collar Height	Installation Height
03	10,5 mm (.413)
05	13,0 mm (.512)
08	16,0 mm (.630)



Mechanical Data

Working Stroke: 5,5 mm (.217)
Maximum Stroke: 7,5 mm (.295)
Spring Force at Work. Stroke: 1,5 N (5.4oz)
alternative: 0,8 N (2.9oz)

Electrical Data

Current Rating: 2 - 3 A
R_i typical: < 20 mΩ

Materials

Plunger: BeCu or Steel, gold-plated or chemically nickel-plated
Barrel: Brass, gold-plated
Spring: Steel, gold-plated
Receptacle: Brass, gold-plated

Mounting Hole Size

with Receptacle: ø 1,31 - 1,32 mm (.0516 - .0520)
without Receptacle: ø 1,00 mm (.0394)

Note:
The Receptacle can be used from Grid 1,91 (75 Mil) up.

Tools:
Insertion and Extraction Tools for GKS and KS see Page 118.

Ordering Example

Series	Tip Material 2 = Steel 3 = BeCu	Tip Style	Tip Diameter (1/100 mm)	Plating A = Gold N = Nickel	Spring Force (dN)	Collar Height (mm)
--------	---------------------------------------	-----------	----------------------------	-----------------------------------	----------------------	-----------------------

Test Probe for usage **without** Receptacle:

G K S 1 8 1 3 5 1 0 8 0 A 1 5 0 3

Test Probe for usage **with** Receptacle:

G K S 1 8 1 3 5 1 0 8 0 A 1 5 0 0

Receptacles:

K S - 1 8 1 3 5 E 03 K S - 1 8 1 3 5 E 05 K S - 1 8 1 3 5 E 08

Plug for Direct Connection on to GKS:

S E - 1 1 1

Plug for Receptacle:

S E - 1 0 1

		Available Tip Styles		
Material	Tip Style	Plating	Further Versions	
			ø	ø (inch)
3	05	A	ø 0,80 (.031)	
3	51	A	ø 0,80 (.031)	
3	54	A	ø 0,80 (.031)	
2	91	N	ø 0,80 (.031)	



Metric Standard Probes

As an enhancement of the classical ICT/FCT Test Probe without a collar, the standard metric Test Probes have a pre-defined collar and distinguish themselves with a high level of stability and sturdiness. Depending on the series, the collar is available with different heights and, in combination with the Receptacles, offers maximum flexibility of the installation height.

Apart from the classical applications, these series cover numerous special applications, e.g. Test Probes with continuous, through plungers, short- or long-stroke versions as well as battery charging probes.

Metric Standard Probes (≥ 2,54 mm)

KS-112	50
GKS-112	51
VS-112	51
GKS-912	52
GKS-422	53
GKS-412	54
GKS-204/204 M	55
GKS-102	56
GKS-502	57
GKS-113	58
GKS-913	59
GKS-103/103 M	60
GKS-503/503 M	61
GKS-364	62
GKS-365	63
GKS-366	63
GKS-854	138

Screw-in Test Probes from page 125 on.

Metric Stand.

Solderable

Short-stroke

Flying Probes

DKS

SKS

PKS/PSK

RF/Dipole Test Probes





HSS


Fixture customizing



Tools




Cable Test Probes






Receptacles of the Series KS-112 are available with different Collar Heights. Variable Installation Heights are possible. *The number of variations can be increased when using Spacers. However, it is then possible that the holding force of the Test Probe in the Receptacle could be reduced. In such cases, Test Probes with bent ends (End Designation „B“ = Banana) should be used. The Receptacles KS-112 47 (with wire-wrap-Post) are sufficiently vacuum-sealed for usage in vacuum fixtures.

Receptacles with Solder Terminal		
Order No.:	Receptacle Type	Collar Height in mm (inches)
KS-112 23		0,2 (.008)
KS-112 30		0,2 (.008)
KS-112 30 E2		2 (.079)
KS-112 30 E5		5 (.179)

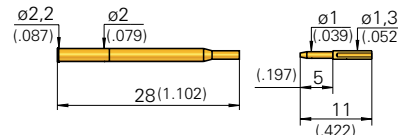
Receptacles with Plug Connection		
KS-112 35 with SE-101		0,2 (.079)

Receptacles with Press-ring		
KS-112 30 G8		1 ... 8 (.039... .315)
KS-112 47 G8		8 (.039... .315)

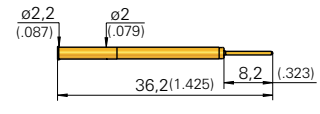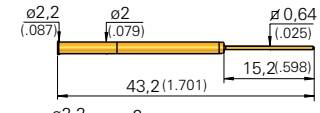
Vacuum-sealed Receptacles with Wire-Wrap-Posts		
KS-112 47		0,2 (.008)
KS-112 47 15		0,2 (.008)
KS-112 47 E2/E5		2/5 (.079 / .197)

* Spacers to vary the installation Height				
				
DS-112-01	DS-112 01	DS-112 02	DS-112 03	DS-112 05


- Receptacles: **KS - 1 1 2 3 0** **KS - 1 1 2 4 7**
- Spacers: **DS - 1 1 2 0 2** **DS - 1 1 2 0 5**
- Insertion Tools for all Receptacles: **SW KS - 1 1 2**



Example for usage of KS-112 with different Collar Heights



Example for usage of KS-112 ... G8 (with Press-ring)



* Example of usage of a Receptacle with and without Spacer (restrictions see above)

Mounting Hole Size

for KS with Collar:

CEM 1: \varnothing 1,98 - 2,00 mm (.0780 - .0787)

FR 4: \varnothing 1,99 - 2,01 mm (.0783 - .0791)

Material

for KS with Collar:

Brass or Nickel-silver, gold-plated

Mounting Hole Size

for KS with Press-ring

(Press-ring pressed in die Mounting Hole)

CEM 1 and FR 4: \varnothing 2,03 - 2,05 mm

(.0799 - .0807)

Material

for KS with Press-ring:

Bronze, gold-plated


Tools:

Insertion and Extraction Tools for GKS and KS see Page 118.

Grid:
 ≥ 2,54 mm
 ≥ 100 Mil


Installation Height: 10,3 - 18,3 mm (.406 - .720)
Recommended Stroke: 4,0 resp. 6,4 mm (.157 resp. .252)

Mounting and Functional Dimensions

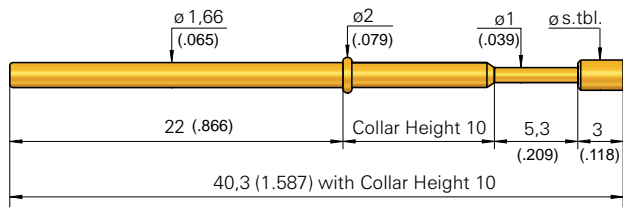

Plug


VS-112 is used instead of a Test Probe and prevents in case of maintenance, that not required Receptacles will accidentally be used.



Collar Height and Installation Height

To adjust the Installation Height off the Tip (Dimension without Receptacle) Test Probes with alternative Collar Heights are available.

Collar Height	Installation Height (without Receptacle)
02	10,3 mm (.406)
03	11,3 mm (.445)
04	12,3 mm (.484)
05	13,3 mm (.524)
06	14,3 mm (.563)
07	15,3 mm (.602)
08	16,3 mm (.642)
09	17,3 mm (.681)
10	18,3 mm (.720)



without KS

Mechanical Data

Working Stroke: 4,0 mm (.157)
Maximum Stroke: 5,3 mm (.209)
Spring Force at Work. Stroke: 1,5 N (5.4oz)
alternative: 0,6 N (2.2oz); 0,8 N (2.9oz); 2,25 N (8.1oz); 3,0 N (10.8oz); 5,0 N (18.1oz)

Test Probes with Tip Diameter ≤ 1,0 mm (.039) have a maximum Working Stroke of 8,0 mm (.315)
 Exception: 5,0 N-Spring (18.1oz): max. Stroke is always 5,3 mm (.209).

Materials

Plunger: BeCu or Steel, gold-plated, rhodium- or chemically nickel-plated
Barrel: Nickel-Silver or Brass, gold-plated
Spring: Steel, gold-plated, Stainless Steel*(C)
Receptacle: Brass, gold-plated

Operating Temperature

Standard: -40° up to +80° C
***with spec. Designation "C":** -100° up to +200° C (0,8 N ; 1,5 N; 2,25 N; 3,0 N)

Electrical Data

Current Rating: 5 - 8 A
R_i typical: < 20 mΩ (* < 100 mΩ)

Available Tip Styles

Material	Tip Style	Plating	Further Versions	
			Ø	Ø (inch)
2	01	R A	0,80	(.031)
3	02	A		
3	02	A	1,00 1,50	(.039) (.059)
3	03	A	1,40 1,80	(.055) (.071)
2	04	R	1,30	(.051)
3	05	A	0,80	(.031)
3	05	A	1,00 1,40 2,30	(.039) (.055) (.091)
0	06**	A		
3	06	A	1,30 R 1,50 R 1,80 R 2,50 R	(.051) (.059) (.071) (.098)
2	07	R A	1,30 A	(.051)
2	09***	N		
2	14	A	1,30 R	(.051)
2	17	N		
3	19	A	2,00 A	(.079)

** also available as Tip Style 0 02 and 0 03,
 Installation Height plus 0,8 mm (.031)

*** pressed-in Steel point in Base Plunger made of Brass

Note to GKS-112 and KS-112:
 For the Test Probes series GKS-112 Receptacles of the series KS-112 are used (see Page 50).

Note:
 Screw-in Versions see Page 132.

Tools:
 Insertion and Extraction Tools for GKS and KS see Page 118.

Ordering Example

Series	Tip Material	Tip Style	Tip Diameter (1/100 mm)	Plating	Spring Force (dN)	Collar Height (mm)	Special Designation („B“, „C“)
0 = Delrin	2 = Steel			N = Nickel			
	3 = BeCu			R = Rhodium			

Test Probe:

G K S 1 1 2 2 0 4 1 3 0 R 1 5 0 2

Receptacle for GKS-112:

K S - 1 1 2 3 0 K S - 1 1 2 4 7

Plug:

V S - 1 1 2

e-type® Probes
 ICT / FCT
 Bead Probes
 Fine Pitch
 Metric Stand.
 Solderable
 Short-stroke
 Flying Probes
 DKS
 SKS
 PKS / PSK
 RF / Dipole Test Probes
 HSS
 Fixture customizing
 Tools
 Cable Test Probes

GKS 912

ICT-/FCT Test Probe

Grid:


≥ 2,54 mm

≥ 100 Mil

Installation Height: 10,0 - 18,0 mm (.394 - .709)

Recommended Stroke: 4,0 mm (.157)


Mounting and Functional Dimensions

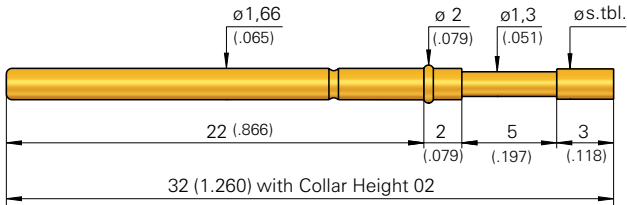

Collar Height and Installation Height

To adjust the Installation Height off the Tip (Dimension without Receptacle) use Test Probes with alternative Collar Heights.

Collar Height	Installation Height (without Receptacle)
02	10,0 mm (.394)
03	11,0 mm (.433)
04	12,0 mm (.472)
05	13,0 mm (.512)
06	14,0 mm (.551)
07	15,0 mm (.591)
10	18,0 mm (.709)



(**Tip Style 00x: Install. Height is 0,8 mm (.031) higher)

Mechanical Data

Working Stroke: 4,0 mm (.157)

Maximum Stroke: 5,0 mm (.197)

Spring Force at Work. Stroke: 1,5 N (5.4oz)

alternative: 0,6 N (2.2oz); 0,8 N (2.9oz);

2,25 N (8.1oz); 3,0 N (10.8oz); 5,0 N (18.1)

Electrical Data

Current Rating: 5 - 8 A

R_i typical: < 20 mΩ (* < 100 mΩ)

Materials

Plunger: BeCu or Steel, gold-plated, rhodium- or chemically nickel-plated

Barrel: Nickel-Silver or Brass, gold-plated

Spring: Steel, gold-plated or Stainless Steel* (C)

Operating Temperature

Standard: -40° bis +80° C

***with Spec. Designation "C":** -100° up to +200° C (0,8 ; 1,5; 2,25; 3,0 N)

Tools:

Insertion and Extraction Tools for GKS and KS see Page 118.

Available Tip Styles

Material	Tip Style	Plating	Further Versions	
			∅	∅ (inch)
2	01	A	0,60 R 0,80 R 1,00 R	(.024) (.031) (.039)
3	02	A	2,50	(.098)
3	03	A	1,80 2,50 3,50	(.071) (.098) (.138)
2	04	A	1,30 2,00 R	(.051) (.079)
3	05	A	0,70 1,40 1,50	(.028) (.055) (.059)
0	06**	A		
3	06	A	1,40 A	(.055)
3	06	R	1,50 1,80 2,50 3,50	(.059) (.071) (.098) (.138)
2	07	A R	1,30 A 1,50 A 1,80 A 2,50 A	(.051) (.059) (.071) (.098)
2	09***	N	0,70 A 0,80 A	(.028) (.031)
2	14	A	1,30 R	(.051)
2	15***	A	1,30 R	(.051)
2	17	N	1,30 A	(.051)
2	24	R	1,30 A	(.051)
2	31	R		
2	33	N		
2	88	A		
2	91	A	1,30 N 1,30 G	(.051) (.051)
2	93	A		


** also available as Tip Style 0 02 or 0 03

*** pressed-in Steel Tip in Base Plunger of Brass

Note:

For Test Probes series GKS-912 Receptacles of the series KS-112 are used (see Page 50).

Ordering Example

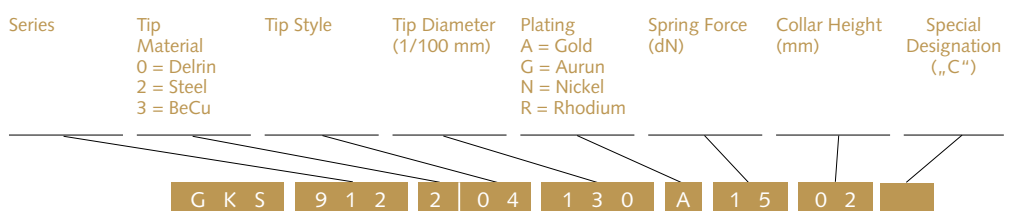


Test Probe

Grid:
 ≥ 2,54 mm
 ≥ 100 Mil

Installation Height: 16,0 mm (.630)
 Recommended Stroke: 6,4 mm (.252)


Mounting and Functional Dimensions

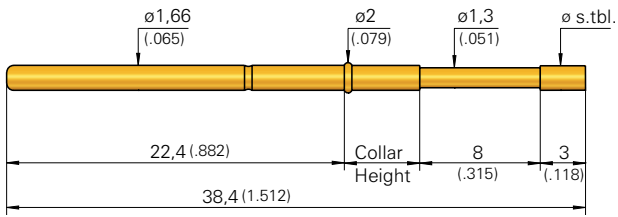

Collar Height and Installation Height

The Test Probes are always supplied with a Collar Height of 5 mm (.197).
 The Test Probes with Tip Style 01 and 09 have a Collar Height of 8 mm (.315) - this to ensure stability of the plunger shaft.

Collar Height	Installation Height (without Receptacles)
05	16 mm (.630)
08	16 mm (.630)
(** Tip Styles 00x: Install. Height 16,8 mm (.661))	



Mechanical Data

Working Stroke: 6,4 mm (.252)
Maximum Stroke: 8,0 mm (.315)
Spring Force at Work. Stroke: 1,5 N (5.4oz)
alternative: 0,8 N (2.9oz); 2,25 N (8.1oz); 3,0 N (10.8oz); 5,0 N (18.1oz)

Materials

Plunger: BeCu or Steel, gold-plated rhodium- or chemically nickel-plated
Barrel: Bronze, gold-plated
Spring: Steel, gold-plated or Stainless Steel* (C)

Electrical Data

Current Rating: 5 - 8 A
R_i typical: < 20 mΩ (* < 100 mΩ)

Operating Temperature

Standard: -40° up to +80° C
***with Spec. Designation "C":** -100° up to +200° C (1,5 N; 3,0 N)

Available Tip Styles

Material	Tip Style	Plating	Further Versions	
			∅	∅ (inch)
2	01	A	1,30 R	(.051)
3	02	A		
2	04	A		
3	05	A	0,70	(.028)
0	06**	A		
3	06	A	1,30 1,60	(.051) (.063)
3	07	A		
2	09***	N	0,80 A/G 0,60 A/N	(.031) (.024)
2	14	A	0,60 2,00	(.024) (.079)
2	17	A		
2	24**	A		
2	33	N	1,30 A	(.051)
2	91	N	0,80 N 1,30 A/G	(.031) (.051)
2	93	A		

** also available as Tip Style 0 02
 *** pressed-in Steel Tip in Base Plunger made of Brass
 **** higher middle tip plus 0,5 mm

Note:

For Test Probes series GKS-422 Receptacles of the series KS-112 are used (see Page 50).

Tools:

Insertion and Extraction Tools for GKS and KS see Page 118.

Ordering Example

Series	Tip Material	Tip Style	Tip Diameter (1/100 mm)	Plating	Spring Force (dN)	Collar Height (mm)	Special Designation („C“)
GKS	0 = Delrin 2 = Steel 3 = BeCu	422	2	A = Gold G = Aurum N = Nickel R = Rhodium	15	05	
Receptacle:	KS - 112 47						

e-type® Probes
 ICT / FCT
 Bead Probes
 Fine Pitch
 Metric Stand.
 Solderable
 Short-stroke
 Flying Probes
 DKS
 SKS
 PKS / PSK
 RF / Dipole Test Probes
 HSS
 Fixture customizing
 Tools
 Cable Test Probes

GKS 412

Long-stroke Test Probe for Dual-stage Fixture

Grid:


≥ 2,54 mm

≥ 100 Mil

Installation Height: 14,8 - 22,8 mm (.583 - .898)

Recommended Stroke: 8,0 mm (.315)

Mounting and Functional Dimensions

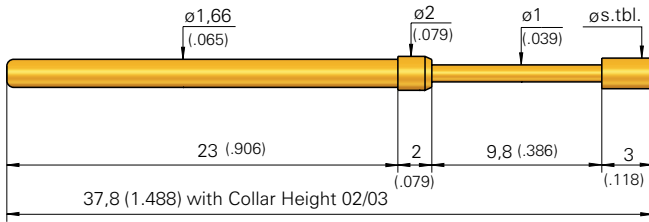


Collar Height and Installation Height

To adjust the Installation Height of the Tip (Dimension without Receptacle), Test Probes with various Collar Heights are available.

Collar Height	Total Length	Installation Height (without KS)
02	37,8 mm (1.488)	14,8 mm (.583)
03	37,8 mm (1.488)	15,8 mm (.622)
05	40,2 mm (1.583)	17,8 mm (.701)
07	41,8 mm (1.646)	19,8 mm (.780)
10	44,8 mm (1.764)	22,8 mm (.898)

(* Tip Style 00x: Install. Height is 0,8 mm (.315) higher)

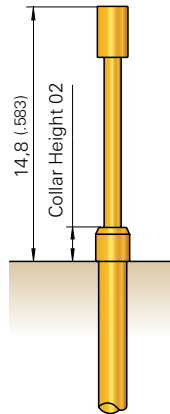

Mechanical Data

Working Stroke: 8,0 mm (.315)
Maximum Stroke: 9,8 mm (.386)
Spring Force at Work. Stroke: 1,5 N (5.4oz)
alternative: 0,6 N (2.2oz); 3,0 N (10.8oz); 5,0 N (18.1oz)

Electrical Data

Current Rating: 5 - 8 A
R_i typical: < 20 mΩ

Materials

Plunger: BeCu or Steel, gold-plated, rhodium- or chemically nickel-plated
Barrel: Brass or Nickel-Silver, gold-plated
Spring: Steel, gold-plated

Note:

For Test Probes series GKS-412 Receptacles of the series KS-112 are used (see Page 50).

Tools:

Insertion and Extraction Tools for GKS and KS see Page 118.

Ordering Example

Series	Tip Material	Tip Style	Tip Diameter (1/100 mm)	Plating	Spring Force (dN)	Collar Height (mm)
GKS	0 = Delrin 2 = Steel 3 = BeCu			A = Gold R = Rhodium N = Nickel		

Test Probe:

G K S 4 1 2 2 0 4 1 3 0 A 1 5 0 2

Receptacle:

K S - 1 1 2 4 7

		Available Tip Styles			
Material	Tip Style	Plating	Further Versions		
			∅	∅ (inch)	
2	01	R	∅ 1,00 (.039)		
3	03	A	∅ 1,80 (.071)	2,00 A (.079)	
0	03*	A	∅ 2,30 (.091)		
2	04	R	∅ 1,30 (.051)		
2	06	R	∅ 1,30 (.051)	2,00 R (.079) NEW	
3	07	R	∅ 1,30 (.051)		
2	09**	N	∅ 0,70 (.028)		
2	14	A	∅ 1,30 (.051)		
2	17	A	∅ 2,00 (.079)		
2	24	R	∅ 2,00 (.079)		
2	25	R	∅ 1,50 (.059)		
2	88	A	∅ 1,80 (.071)		
2	91	A	∅ 1,30 (.051)		


** pressed-in Steel Tip in Base Plunger made of Brass

Grid:
 ≥ 2,54 mm
 ≥ 100 Mil


Installation Height: 16/18/23 mm (.630/ .709/ .906)
Recommended Stroke: 8,0 mm (.315)

Mounting and Functional Dimensions

GKS-204

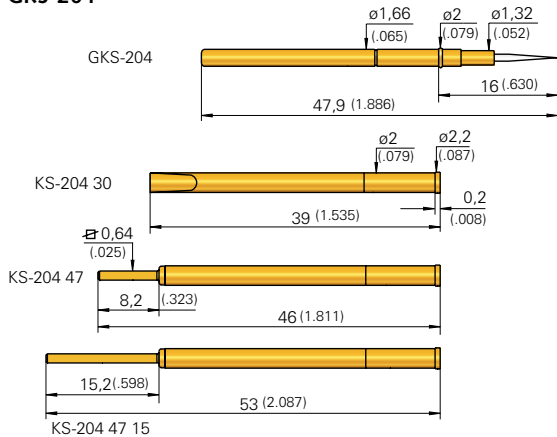


GKS-204 ... M

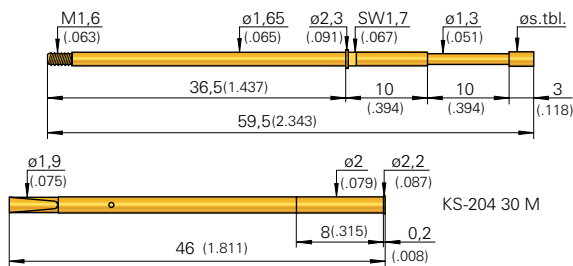

Collar Height and Installation Height

To adjust the Installation Height of the Tip (dimension without Receptacle), use Test Probes with alternative Collar Heights.

Collar Height	Installation Height (without Receptacle)
03	16,0 mm (.630)
05	18,0 mm (.709)
10	23,0 mm (.906)
10 M (with KS)	23,0 mm (.906)



Mechanical Data

Working Stroke: 8,0 mm (.315)
Maximum Stroke: 10,0 mm (.394)
Spring Force at Work. Stroke: 1,5 N (5.4oz)
alternative: 0,8 N (2.9oz); 3,0 N (10.8oz)

Electrical Data

Current Rating: 5 - 8 A
R_i typical: < 20 mΩ

Materials

Plunger: BeCu or Steel, gold-plated, rhodium- or chemically nickel-plated
Barrel: Nickel-Silver or Brass, gold-plated
Spring: Steel, gold-plated
Receptacle: Brass, gold-plated

Mounting Hole Size

KS-112, see Page 50
for KS-204 30 M: ø 1,99 mm (.0783)

Available Tip Styles

Material	Tip Style	Plating	Further Versions	
			Ø	Ø (inch)
2 01		R	Ø 1,30 (.051)	
3 02		A	Ø 1,80 (.071)	
3 03		A	Ø 1,80 (.071)	
2 04		A	Ø 1,30 (.051)	
3 05		A	Ø 1,30 (.051)	
2 06		R	Ø 1,80 (.071)	
2 07		A	Ø 1,30 (.051)	
2 09*		N	Ø 0,70 (.028)	0,70 G (.028)
2 14		A	Ø 1,30 (.051)	
2 15*		A	Ø 1,80 (.071)	
2 24		R	Ø 2,00 (.079)	
2 91		N	Ø 1,30 (.051)	1,30 (.051)
2 93		A	Ø 1,60 (.063)	

* pressed-in Steel Tip in Base Plunger made of Brass

Note:

GKS-204 ... M will be screwed into Receptacle KS-204 30 M using special Tools (see Page 170).

Recommended Screw-in Torque:
 Min.: 3 Ncm / Max.: 5 Ncm

Tools:

Insertion and Extraction Tools for GKS and KS see Page 118.

Ordering Example

Series	Tip Material	Tip Style	Tip Diameter (1/100 mm)	Plating	Spring Force (dN)	Collar Height (mm)	Type (alternative "M")
G K S	2 = Steel 3 = BeCu	2 0 4	1 3 0	A = Gold R = Rhodium N = Nickel	1 5	0 3	
Test Probe: G K S 2 0 4 2 0 4 1 3 0 A 1 5 0 3							
Receptacles: K S - 2 0 4 4 7 K S - 2 0 4 4 7 1 5 K S - 2 0 4 3 0							
Receptacle for Screw-in Version: K S - 2 0 4 3 0 M							

GKS 102

Universal Test Probe for direct Wiring

Grid:


≥ 2,54 mm

≥ 100 Mil


Installation Height: 12,5 resp. 13,5 mm (.492/ .531)

Recommended Stroke: 4,8 mm (.189)


Mounting and Functional Dimensions

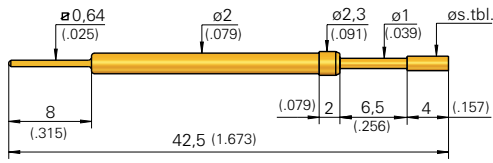


GKS-102 ... W



KS-102 23




DS-102 03



DS-102 06

GKS-102 250 400 P xx02 W

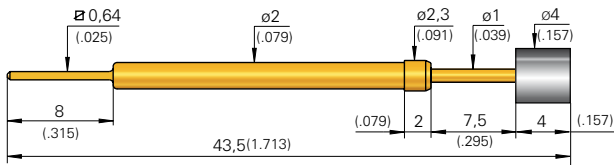

Available Tip Styles


Material	Tip Style	Plating	Further Versions	
			∅	∅ (inch)
2	01	A	∅ 1,00 (.039)	
1	02	A	∅ 1,40 (.055)	2,30 (.091)
1	03	A	∅ 1,40 (.055)	
2	04	A	∅ 1,40 (.055)	
1	05	A	∅ 1,40 (.055)	
2	06	A	∅ 1,40 (.055)	
2	50*	P	∅ 4,00 (.157)	

* PCB Support Probe: insulating Tip made of PVC
Installation Height 13,5 mm (.531)

Collar Height and Installation Height

The Installation Height of the Tip (Dimension without Receptacle) is defined by the Collar Height.

Collar Height	Installation Height (without Receptacle)
02 Tip Style 01 up to 06	12,5 mm (.492)
02 Tip Style 50*	13,5 mm (.531)



Mechanical Data

Working Stroke: 4,8 mm (.189)

Maximum Stroke: 6,5 mm (.256)

Spring Force at Work. Stroke: 1,5 N (5.4oz)

alternative: 3,0 N (10.8oz); 5,0 N (18.1oz)

Electrical Data

Current Rating: 5 - 8 A

R_i typical: < 20 mΩ

Materials

Plunger: Brass or Steel, gold-plated

Barrel: Brass, gold-plated

Spring: Steel, gold-plated

Receptacle: Brass, gold-plated

Mounting Hole Size

with Receptacle: ∅ 2,48 - 2,49 mm (.0976 - .0980)

without Receptacle: ∅ 2,00 mm (.0787)

Note:

The Receptacle can be used from Grid 3,50 mm (140 Mil) up.

Tools:

Insertion and Extraction Tools for GKS and KS see Page 118.

Ordering Example

Series	Tip Material 1 = Brass 2 = Steel	Tip Style	Tip Diameter (1/100 mm)	Plating A = Gold P = PVC	Spring Force (dN)	Collar Height (mm)	Type
--------	--	-----------	----------------------------	--------------------------------	----------------------	-----------------------	------

Test Probe:

G K S 1 0 2 1 0 2 1 4 0 A 1 5 0 2 W

Receptacle:

K S - 1 0 2 2 3


Spacers:

D S - 1 0 2 0 3 D S - 1 0 2 0 6

Grid:
 ≥ 2,54 mm
 ≥ 100 Mil

Installation Height: 12,0 resp. 13,0 mm (.472/ .512)
Recommended Stroke: 5,6 mm (.220)

Mounting and Functional Dimensions

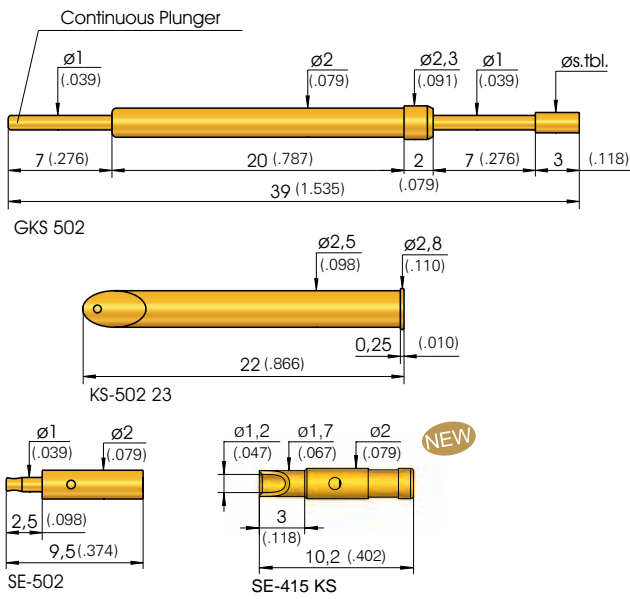

Available Tip Styles


Material	Tip Style	Plating	Further Versions	
			ϕ	ϕ (inch)
3 02		A		
3 03		A		
3 04		A		
2 33 ***		R		
3 53 **		A		
3 56 **		A	2,50 R	(.098)

** Tip Length 4 mm (.157)
 *** Tip Length 4 mm (.157), Special Designation "L"

Collar Height and Installation Height

The Installation Height of the Tip (Dimension without Receptacle) is defined by the Collar Height.

Collar Height	Tip Style	Install. Height (without KS)
02	04 / 03 / 02	12,0 mm (.472)
02	56 / 53 / 33	13,0 mm (.512)



Mechanical Data

Working Stroke: 5,6 mm (.220)
Maximum Stroke: 7,0 mm (.276)
Spring Force at Work. Stroke: 1,5 N (5.4oz)
alternative: 0,8 N (2.9oz); 3,5 N (12.5oz); 5,0 N (18.1oz)

Electrical Data

Current Rating, Conn. to Plunger: 12-15 A
Current Rating, Connection to KS: 5 - 8 A
R_i typical, Connection to Plunger: < 10 m Ω
R_i typical, Connection to KS: < 30 m Ω (* < 100 m Ω)

Materials

Plunger: BeCu or Steel
 gold- or rhodium-plated
Barrel: Brass, gold-plated
Spring: Steel, gold-plated or Stainless Steel*
Receptacle: Brass, gold-plated

Mounting Hole Size

in CEM 1 and FR 4:
with Receptacle: ϕ 2,48 - 2,49 mm (.0976 - .0980)
without Receptacle: ϕ 2,00 mm (.0787)

Note:

The Receptacle can be used from Grid 3,50 mm (140 Mil) up.


Tools:

Insertion and Extraction Tools for GKS and KS see Page 118.

Operating Temperature

Standard: -40° up to +80° C
***with 5,0 N-Spring:** -100° up to +200° C

Ordering Example

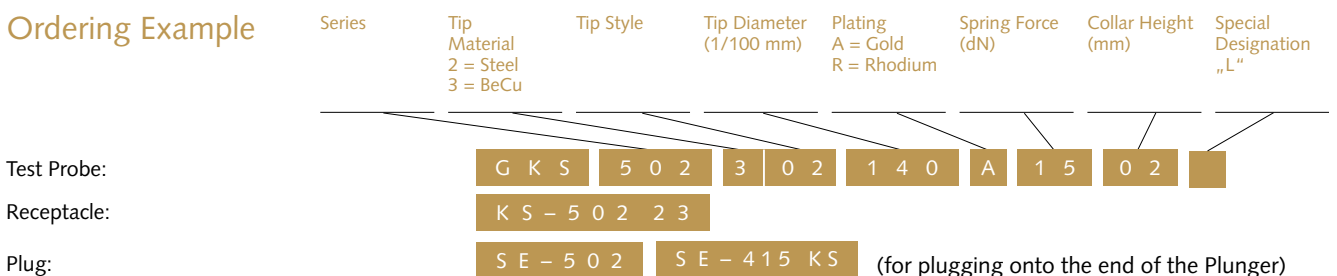

e-type® Probes
 ICT / FCT
 Bead Probes
 Fine Pitch
 Metric Stand.
 Solderable
 Short-stroke
 Flying Probes
 DKS
 SKS
 PK / PSK
 RF / Dipole Test Probes
 HSS
 Fixture customizing
 Tools
 Cable Test Probes

GKS 113

Test Probe

Grid:


≥ 4,00 mm

≥ 160 Mil

Installation Height: 10,5/13,5/18,5 mm (.413/ .531/ .728)

Recommended Stroke: 4,0 mm (.157)


Mounting and Functional Dimensions

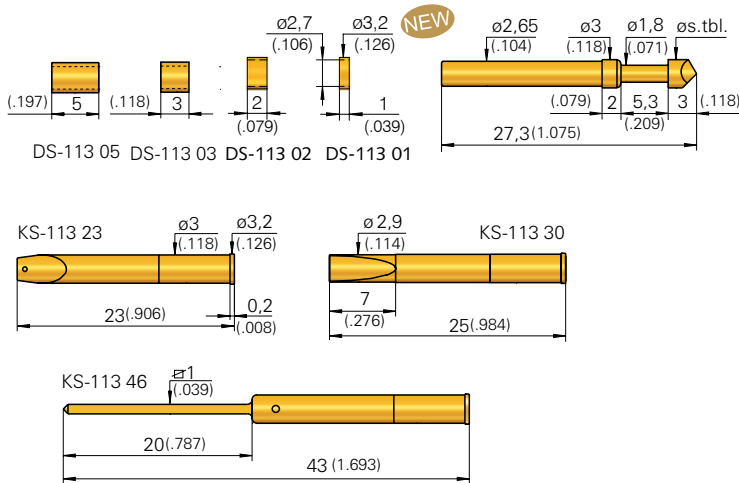

Collar Height and Installation Height

The Installation Height of the Tip (dimension measured with Receptacle) is defined by the Collar Height.

Collar Height	Installation Height (with Receptacle)
02	10,5 mm (.413)
05	13,5 mm (.531)
10	18,5 mm (.728)



Mechanical Data

Working Stroke: 4,0 mm (.157)
Maximum Stroke: 5,3 mm (.209)
Spring Force at Work. Stroke: 1,5 N (5.4oz)
alternative: 0,3 (1.1oz); 0,6 (2.2oz); 1,0 (3.6oz); 2,25 (8.1oz); 3,0 (10.8oz); 5,0 N (18.1oz)

Electrical Data

Current Rating: 5 - 8 A
R_i typical: < 30 mΩ (* < 100 mΩ)

Operating Temperature

Standard: -40° up to +80° C
***with Spec. Designations "C":** -100° up to +200° C (1,5 N; 2,25 N; 3,0 N)

Materials

Plunger: BeCu or Steel, gold-, rhodium- or chemically nickel-plated
Barrel: Brass, gold-plated
Spring: Steel, gold-plated or Stainless Steel*(C)
Receptacles: Brass, gold-plated

Mounting Hole Size

for GKS-113 and KS-113:
with Receptacle: ø 2,98 - 2,99 mm (.1173 - .1177)
without Receptacle: ø 2,65 mm (.1043)

Note:

For Test Probes Series GKS-113 Receptacles of the series KS-113 are used. Screw-in Versions see Page 135.

Available Tip Styles


Material	Tip Style	Plating	Further Versions	
			ø	ø (inch)
2	01	R	ø 1,80 (.071)	
3	02	A	ø 1,40 (.055) ø 2,30 (.091)	0,80 (.031) 1,00 (.039) 1,80 (.071) 3,00 (.118) 4,00 (.157)
2	03	A	ø 3,00 (.118)	
3	03	A	ø 2,30 (.091)	4,00 R (.157)
2	04	R	ø 2,30 (.091)	1,80 A (.071) 3,00 (.118)
3	05	A	ø 2,30 (.091)	0,80 (.031) 1,40 (.055) 3,00 R (.118)
3	55	R	ø 3,00 (.118)	Tip Length 4 mm (.157)
3	06	A	ø 3,00 (.118)	1,60 (.063) 2,30 (.091) 4,00 (.157) 8,00 (.315)
3	06	R	ø 2,30 (.091)	2,50 (.098) 3,50 (.138) 6,00 (.236)
2	07	A	ø 3,00 (.118)	4,20 R (.165)
3	12	A	ø 1,80 (.071)	
3	13	R	ø 1,80 (.071)	
2	14	R	ø 1,40 (.055)	
2	15**	A	ø 1,00 (.039)	Tip Length 5,5 mm
2	17	R	ø 2,30 (.091)	1,80 (.071) 3,00 A (.118)
3	19	A	ø 4,00 (.157)	3,00 (.118)
3	72	A	ø 1,80 (.071)	
2	87	N	ø 2,60 (.102)	4,00 (.157)
2	88	A	ø 2,30 (.091)	

** pressed-in Steel Tip in Base Plunger made of Brass

Tools:

Insertion and Extraction Tools for GKS and KS see Page 118.

Ordering Example

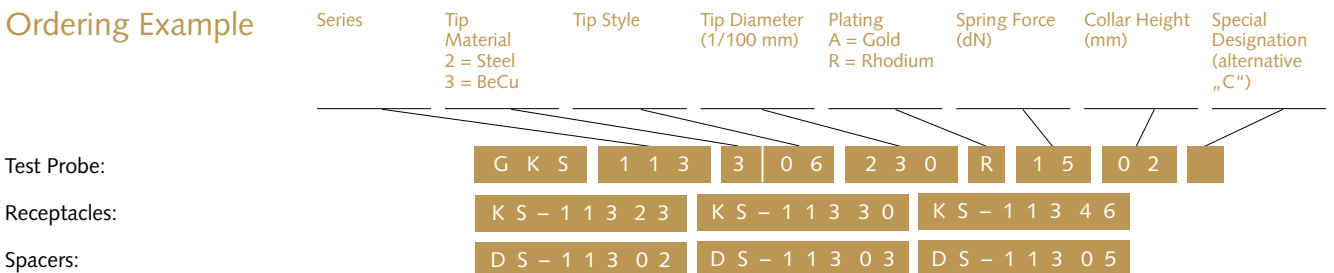


Grid:
 ≥ 4,00 mm
 ≥ 160 Mil

Installation Height: 7,2 / 8,7 mm (.283/ .343)
 Recommended Stroke: 2,8 mm (.110)

Mounting and Functional Dimensions

GKS-913

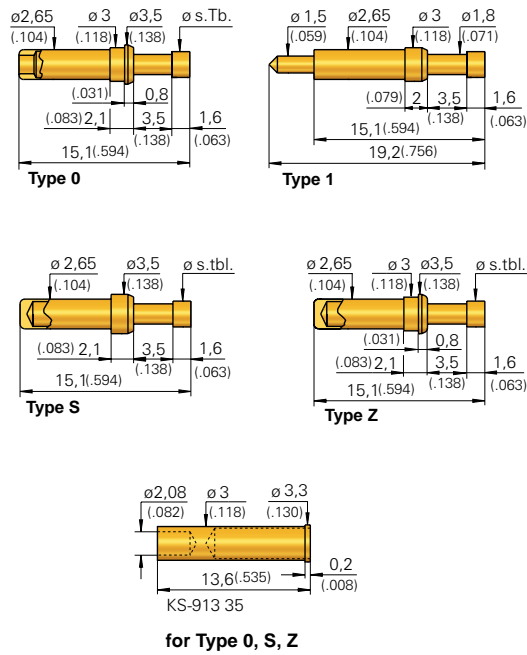

Available Tip Styles

Material	Tip Style	Plating	Further Versions	
			ϕ	ϕ (inch)
1 02		A	3,50	(.138)
3 03		A		
3 05		A		
3 06*		A		
3 06		A	3,50 R 2,30 R	(.138) (.091)
3 08		R		
3 58**		R		

Tip Length: 3,4 mm (.134)

Collar Height and Installation Height

The Installation Height of the Tip is defined by the Collar Height.

Collar Height	Tip Style	Install. Height (without KS) in mm	max. Stroke mm
02	02/05/06/08	7,2 (.283)	3,5 (.138)
02	06 180*	7,2 (.283)	3,2 (.126)
02	58**	8,7 (.343)	3,3 (.130)

Mechanical Data

Working Stroke: 2,8 mm (.110)
Maximum Stroke: see table on the right
Spring Force at Work. Stroke: 1,5 N (5.4oz)
alternative: 0,8 N (2.9oz); 2,5 N (9.0oz)

Materials

Plunger: Brass or BeCu, gold- or rhodium-plated
Barrel: Brass, gold-plated
Spring: Steel, gold-plated or Stainless Steel **** (C)
Receptacle: Brass, gold-plated

Electrical Data

Current Rating: 5 - 8 A (24 A****)
R_j typical: < 20 m Ω (**** < 100 m Ω)

Mounting Hole Size

in Materials CEM 1 and FR 4:
with Receptacle: ϕ 2,98 - 2,99 mm (.1173 - .1177)
without Receptacle: ϕ 2,65 mm (.1043)

Operating Temperature

Standard: -40° up to +80° C
***** with Spec. Designation "C":** -100° up to +200° C (1,5 N)

Note:

Typ	Version
0	End of Probe Barrel open
1	End of Probe Barrel with solder terminal
S	End of Probe Barrel closed; can be soldered into PCB
Z	End of Probe Barrel closed; can be soldered into PCB

Warning: Soldering the Probes demands great care. High temperatures must not reach the inside of the barrel, because this could destroy the spring.

The Receptacle KS-913 35 can only be combined with the Probe Types 0, S and Z.

**** For applications up to 24 A: HSS-520 (see Page 106).

Screw-in Versions see Page 142.

Tools:

Insertion and Extraction Tools for GKS and KS see Page 118.

Ordering Example

Series	Tip Material	Tip Style	Tip Diameter (1/100 mm)	Plating	Spring Force (dN)	Collar Height (mm)	Type
	1 = Brass 3 = BeCu			A = Gold			1, 0, S, Z, 1C, 0C, SC, ZC

Test Probe:

G K S 9 1 3 3 0 8 2 3 0 R 1 5 0 2 0

Receptacles:

K S - 9 1 3 3 5

GKS 103 / 103 M

Universal Test Probe with high stability

Grid:

≥ 4,00 mm


≥ 160 Mil

Installation Height: 12,3 mm (.484)

Recommended Stroke: 4,8 mm (.189)

Mounting and Functional Dimensions


GKS-103 Type „W“

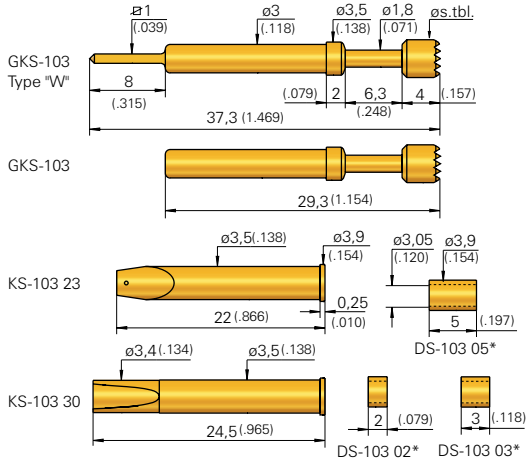

Note:

The Receptacle KS-103 30 is not compatible with GKS-103 Typ „W“.


GKS-103 ... M

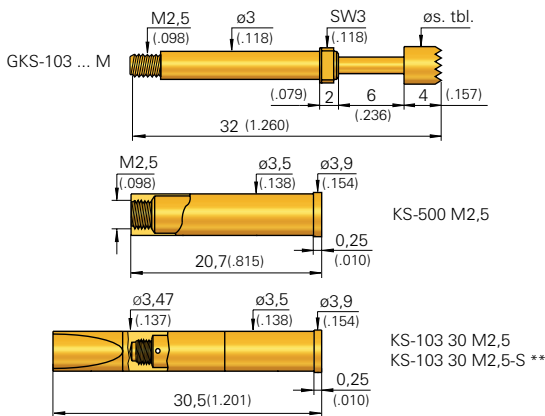

Collar Height and Installation Height

The Installation Height of the Tip is determined by the Collar Height.

Collar Height	Installation Height (without Receptacle)
02	12,3 mm (.484)



Mechanical Data

Working Stroke: 4,8 mm (.189)
Maximum Stroke: 6,0 mm (.236)
Spring Force at Work. Stroke: 1,5 N (5.4oz)
alternative: 0,8 N (2.9oz); 3,0 N (10.8oz), 5,0 N (18.1oz)

Materials

Plunger: Steel or Brass, gold-plated
Barrel: Brass, gold-plated
Spring: Steel, gold-plated or Stainless Steel*** (C)
Receptacle: Brass, gold-plated

Electrical Data

Current Rating: 5 - 8 A
R_i typical: < 30 mΩ (*** < 100 mΩ)

Mounting Hole Size

with Receptacle: ø 3,48 - 3,49 mm (.1370 - .1374)
without Receptacle: ø 3,00 mm (.1181)

Operating Temperature

Standard: -40° bis +80° C
***** with Spec. Designation "C":** -100° up to +200° C (1,5 N; 3,0 N; 5,0 N)

Available Tip Styles

Material	Tip Style	Plating	Further Versions	
			∅	∅ (inch)
2	01	A	∅ 1,80 (.071)	
1	02	A	∅ 2,30 (.091)	4,00 (.157)
2	02	A	∅ 6,50 (.256)	
1	03	A	∅ 2,30 (.091)	4,00 (.157)
2	04	A	∅ 2,30 (.091)	4,00 (.157)
1	05	A	∅ 2,30 (.091)	4,00 (.157)
2	06	A	∅ 2,30 (.091)	4,00 (.157) 6,50 (.256) 9,00 (.354)

* Note:

The Receptacle can be used from Grid 4,50 mm (177 Mil) up.

- Usage of Spacers is not possible with GKS-103 ... M.
- Usage of the Test Probe with Spacer DS-103 03 and DS-103 05 is only possible with KS-103 23-2 (i.e. Receptacle with stronger crimp in upper crimp position.)

** KS-103 30 M2,5-S:

The Test Probes is secured in the Receptacle by means of a crimp.

Note:

GKS-103 ... M will be screwed into Receptacle KS-500 M2,5; using special tools (see Page 170/171).

Test Probes with Tip Diameter > 4,0 mm (.157) cannot be assembled with this tool. Tool upon request

Recommended Screw-in Torque: Min.: 10 Ncm / Max.: 20 Ncm


Ordering Example

	Series	Tip Material 1 = Brass 2 = Steel	Tip Style	Tip Diameter (1/100 mm)	Plating A = Gold	Spring Force (dN)	Collar Height (mm)	Type alternative „W“ „M“, „C“, „WC“, „MC“
Test Probe:	G K S	1	0 3	2	0 1	1 8 0	A	1 5 0 2
Receptacles:	K S - 1 0 3 2 3							K S - 1 0 3 3 0
Receptacles for GKS-103 ... M:	K S - 1 0 3 3 0 M 2.5							K S - 1 0 3 3 0 M 2.5 - S
Spacers*:	D S - 1 0 3 0 2							D S - 1 0 3 0 3
								D S - 1 0 3 0 5


Grid:
 ≥ 4,00 mm
 ≥ 160 Mil

Installation Height: 13,0 mm (.512)
 Recommended Stroke: 5,6 mm (.220)

Mounting and Functional Dimensions

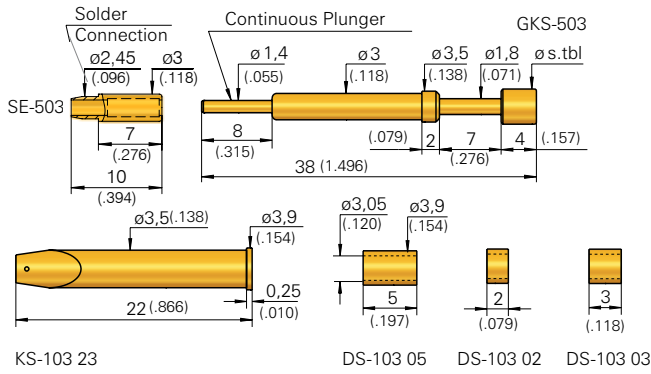


GKS-503 ... M

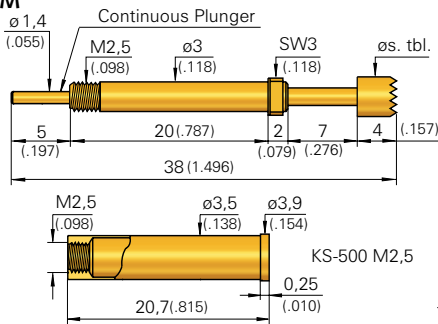

Collar Height and Installation Height

The Installation Height of the Tip is determined by the Collar Height.

Collar Height	Installation Height (without Receptacles)
02	13,0 mm (.512)



Mechanical Data

Working Stroke: 5,6 mm (.220)
 Maximum Stroke: 7,0 mm (.276)
 Spring Force at Work. Stroke: 1,5 N (5.4oz)
 alternative: 3,0 N (10.8oz), 5,0 N (18.1oz)

Electrical Data

Current Rating, Conn. to Plunger: 12-15 A
 Current Rating, Connection to KS: 5 - 8 A
 R_i typical, Connection to Plunger: < 10 m Ω
 R_i typical, Connection to KS: < 30 m Ω
 (** > 100 m Ω)

Operating Temperature

Standard: -40° up to +80° C
 ** with 5,0 N-Spring: -100° up to +200° C

Materials

Plunger: Steel or BeCu, gold- or rhodium-plated
 Barrel: Brass, gold-plated
 Spring: Steel, gold-plated or Stainless Steel**
 Receptacle: Brass, gold-plated

Mounting Hole Size

with Receptacle: ϕ 3,48 - 3,49 mm (.1370 - .1374)
 without Receptacle: ϕ 3,00 mm (.1181)

Available Tip Styles

Material	Tip Style	Plating	Further Versions	
			ϕ	ϕ (inch)
2 01		R	ϕ 1,80 (.071)	
3 03		A	ϕ 4,00 (.157)	
3 04		R	ϕ 4,00 (.157)	
2 05		R	ϕ 1,80 (.071)	
3 06		R A	ϕ 4,00 (.157)	3,00 (.118)
2 06		R	ϕ 1,80 (.071)	

* Note:

The Receptacle can be used from Grid 4,50 mm (177 Mil) up.

- Usage of Spacers is not possible with GKS-503 ... M.
- Usage of the Test Probe with Spacer DS-103 03 and DS-103 05 is only possible with KS-103 23-2 (i.e. Receptacle with stronger crimp in upper crimp position.)

Note:

GKS-503 ... M will be screwed into Receptacle KS-500 M2.5; using special tools (see Page 170/171).

Recommended Screw-in Torque:
 Min.: 10 Ncm / Max.: 20 Ncm

Tools:

Insertion and Extraction Tools for GKS and KS see Page 118.

Ordering Example

	Series	Tip Material 2 = Steel 3 = BeCu	Tip Style	Tip Diameter (1/100 mm)	Plating A = Gold R = Rhodium	Spring Force (dN)	Collar Height (mm)	Type alternative „C“; „M“; „MC“
Test Probe:	G K S	5 0 3	2 0 1	1 8 0	R	1 5	0 2	
Receptacles:	K S - 1 0 3 2 3	K S - 5 0 0 M 2.5						
Spacers*:	D S - 1 0 3 0 2	* D S - 1 0 3 0 3	* D S - 1 0 3 0 5					
Lamellar Plug: (for plugging onto the end of the Plunger)	S E - 5 0 3							

GKS 364

Test Probe with continuous Plunger

Grid:


≥ 6,50 mm

≥ 260 Mil

Installation Height: 6,0 mm (.236)

Recommended Stroke: 4,0 mm (.157)

Mounting and Functional Dimensions

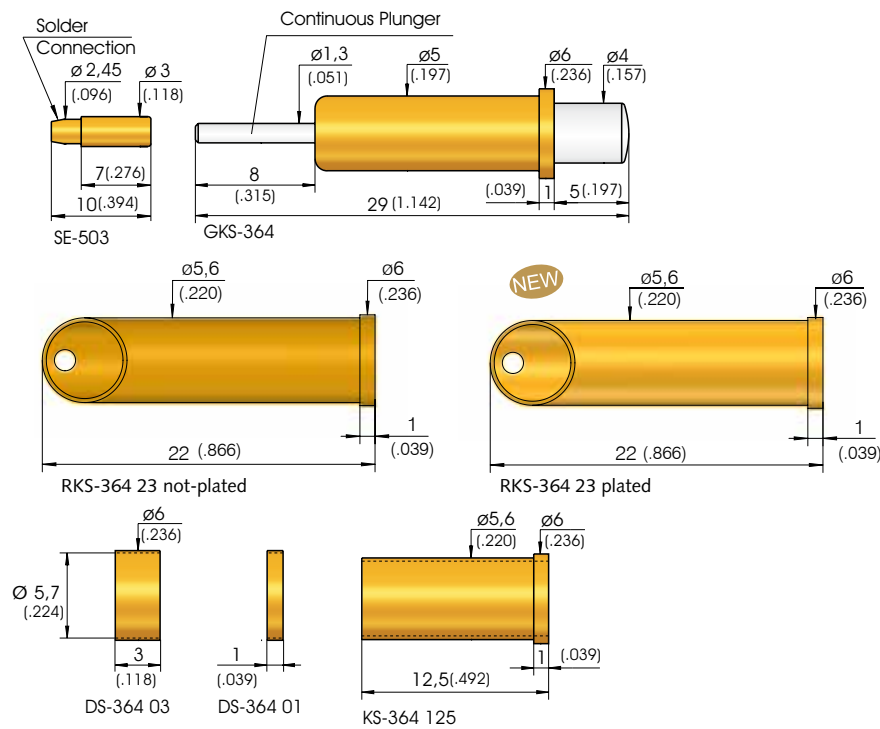

Available Tip Styles

Material	Tip Style	Plating	Further Versions	
			\varnothing	\varnothing (inch)
2 01*		N		
2 04		N		
2 05		N		
2 06		N		

* Angle of Tip 60°

Mechanical Data

Working Stroke: 4,0 mm (.157)
Maximum Stroke: 5,0 mm (.197)
Spring Force at Work. Stroke: 1,5 N (5.4oz)
alternative: 0,6 N (2.2oz); 3,0 N (10.8oz), 8,0 N (28.9oz)

Electrical Data

Current Rating, Conn. to Plunger: 15-20 A
Current Rating, Connection to KS: 5 - 8 A
R_i typical, Connection to Plunger: < 10 mΩ
R_i typical, Connection to KS: < 30 mΩ
 (** < 100 mΩ)

Materials

Plunger: Steel, nickel-plated
Barrel: Brass, gold-plated
Spring: Steel, gold-plated or Stainless Steel**
Receptacles:
 RKS-364 23: Brass, not plated
 KS-364 125: Brass, gold-plated

Mounting Hole Size

with Receptacle: $\varnothing 5,59 - 5,60$ mm (.2201 - .2205)
without Receptacle: $\varnothing 5,00$ mm (.1969)

Operating Temperature

Standard: -40° up to +80° C
****with 1,5 and 3,0 N-Spring:** -100° up to +200° C

Ordering Example


	Series	Tip Material 2 = Steel	Tip Style	Tip Diameter (1/100 mm)	Plating N = Nickel	Spring Force (dN)	Collar Height (mm)
Test Probe:	G K S	3 6 4	2 0 4	4 0 0	N	1 5	0 1
Receptacles:	R K S - 3 6 4 2 3	K S - 3 6 4 2 3	K S - 3 6 4 1 2 5				
Spacer for Receptacle:	D S - 3 6 4 0 3						
Lamellar Plug: (for plugging onto the end of the Plunger)	S E - 5 0 3						

Grid:
≥ 6,50 mm
≥ 260 Mil

Installation Height: 6,0 mm (.236) resp. 11,0 mm (.433)
Recommended Stroke: 3,2 mm (.126) reps. 8,0 mm (.315)

Mounting and Functional Dimensions

GKS 365

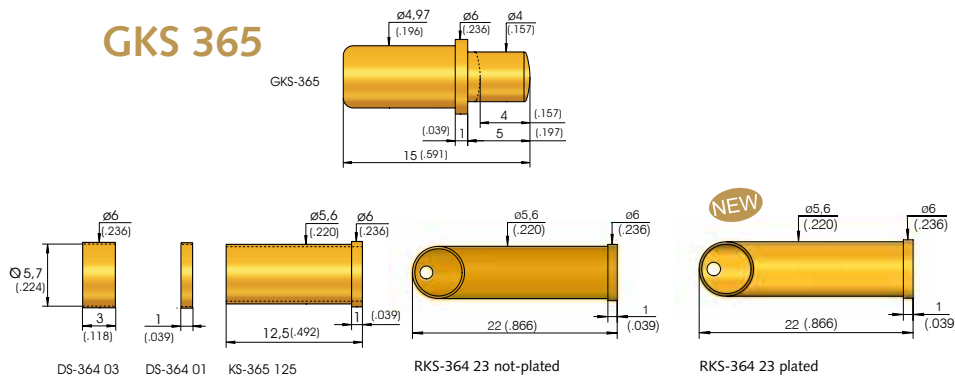


Available Tip Styles GKS 365

Material	Tip Style	Plating	Further Versions	
			∅	∅ (inch)
2 04		N	∅ 4,00 (.157)	
1 05		A	∅ 4,00 (.157)	
2 06		A	∅ 4,00 (.157)	
1 13 *		N	∅ 4,00 (.157)	
1 13S **		A	∅ 4,00 (.157)	

* No radial Forces allowed. Plunger can get stuck
** Ordering Example: GKS-365 113 400 A xx01 S

GKS 366

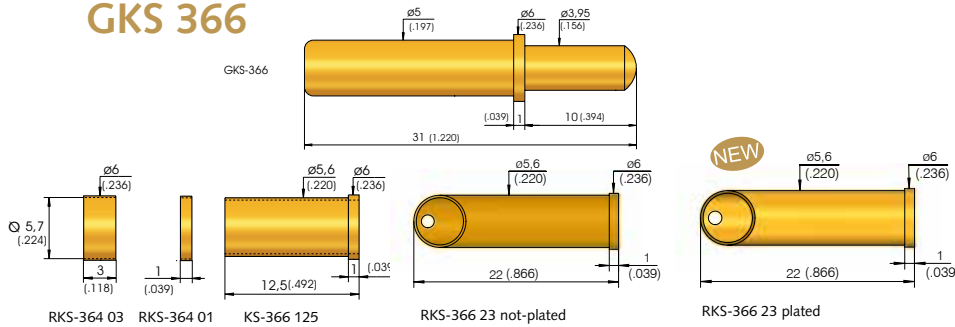

Available Tip Styles GKS 366

Material	Tip Style	Plating	Further Versions	
			∅	∅ (inch)
1 05		N	∅ 4,00 (.157)	
3 05		A	∅ 4,00 (.157)	
3 56 *		A	∅ 4,00 (.157)	

* Total Length = 30 mm, maximum Stroke 9,0 mm

Mechanical Data GKS 365

Working Stroke: 3,2 mm (.126)
Maximum Stroke: 4,0 mm (.157)
Spring Force at Work. Stroke: 1,5 N (5.4oz)
alternative: 0,6 N (2.2oz); 3,0 N (10.8oz), 4,0 N (14.4oz); 8,0 N (28.9oz)

Mechanical Data GKS 366

Working Stroke: 8,0 mm (.315)
Maximum Stroke: 10,0 mm (.394)
Spring Force at Work. Stroke: 1,5 N (5.4oz)
alternative: 3,0 N (10.8oz); 6,0 N (21.6oz); 8,0 N (28.9oz); 16,0 N (57.5oz)

Electrical Data

Current Rating: 5 - 8 A
R_i typical: < 30 mΩ (** < 100 mΩ)

Materials

Plunger: Brass or Steel, gold- or nickel-plated
Barrel: Brass, gold-plated
Spring: Steel, gold-plated or Stainless Steel**

Receptacle for GKS-365:

RKS-365 23: Brass, not plated
KS-365 125: Brass, gold-plated

Receptacle for GKS-366:

RKS-364 23: Brass, not plated
KS-364 125: Brass, gold-plated

Operating Temperature

Standard: -40° up to +80° C
****with 8,0 N-Spring:** -100° up to +200° C (GKS-365)

Mounting Hole Size

with Receptacle: ∅ 5,59 - 5,60 mm (.2201 - .2205)
without Receptacle for GKS-365: ∅ 4,97 mm (.1957)

without Receptacle for GKS-366:

∅ 5,00 mm (.1969)

Note:

Other comparable Versions on request.

Ordering Example

Series	Tip Material 1 = Brass 2 = Steel	Tip Style	Tip Diameter (1/100 mm)	Plating A = Gold N = Nickel	Spring Force (dN)	Collar Height (mm)	Special Designation "S"
Test Probe:	G K S	3 6 5	1 0 5	4 0 0	A	1 5	0 1
Test Probe:	G K S	3 6 6	1 0 5	4 0 0	N	1 5	0 1
Receptacles for GKS-365:	R K S - 3 6 5	2 3	K S - 3 6 5	1 2 5		K S - 3 6 5	2 3
Receptacles for GKS-366:	R K S - 3 6 6	2 3	K S - 3 6 6	1 2 5		K S - 3 6 6	2 3
Spacer for Receptacle:	D S - 3 6 4	0 1	D S - 3 6 4	0 3			

e-type® Probes
ICT / FCT
Bead Probes
Fine Pitch
Metric Stand.
Solderable
Short-stroke
Flying Probes
DKS
SKS
PKS / PSK
RF / Dipole Test Probes
HSS
Fixture customizing
Tools
Cable Test Probes

Spring-loaded Test Probes for Medical Technology



The increasing quality demands in the Medical Technology require high-grade solutions. If conventional contacts cannot satisfy the application requirements, then the usage of spring-loaded Test Probes from INGUN becomes necessary. The design of an INGUN Test Probe, which is based on many years of experience, consists of a Barrel, a contacting Plunger and a spiral-shaped Compression Spring, offers a wide range of advantages.

Your demands – our solutions

Advantages of spring-loaded Test Probes:


- Balancing out of heights and tolerances
- Compensation of errors in regard to parallelism and unevenness.
- Long-life cycle
- Resistant to impact and vibration
- Assembly also in restricted areas and conditions
- High level of conductivity
- Especially adapted gold-plating
- Very good chemical resistance
- Available in small and large quantities
- Standard and customized solutions

Application areas for spring-loaded Contacts:

- Battery charging
- Signal Transfer Contact
- Transferring of RF signals
- Transferring of high-current
- Every type of mechanical and electrical application

You can find typical series for Medical Technology here in the catalog: GKS-064, 364, 365, 366, 761 M, 913 (M), 941, 961, 967 (M), 970, 986, HSS-520 (M)


Example of battery charging contact (cross-section)

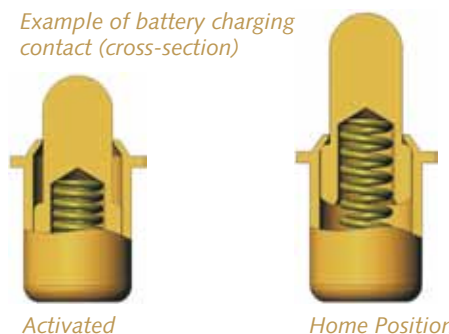

Solderable Probes

Spring-loaded Test Probes can be used not only for test purposes in the ICT/FCT field but can also be soldered directly into or onto PC-Boards and Electronic Units. In such cases the Test Probes normally provide a current or allow an exchange of the Unit during maintenance without any soldering work. The Test Probes are soldered directly into the PC-Board and are used without a Receptacle.

Note: Soldering of the Test Probes demands greater care. High temperatures are not allowed to get inside the barrel, because otherwise the spring could be damaged.

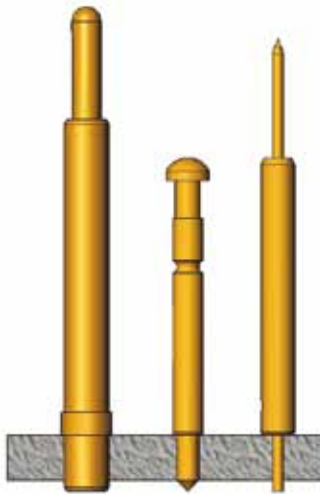

Solderable Probes

GKS-941	66
GKS-064	66
GKS-986	66

GKS 941/GKS 064/GKS 986

Solderable Test Probes

Grid:


≥ 1,91 mm

≥ 75 Mil

Installation Height: 17,5 mm (.689)

Recommended Stroke: 3,2 mm (.126)


GKS 941

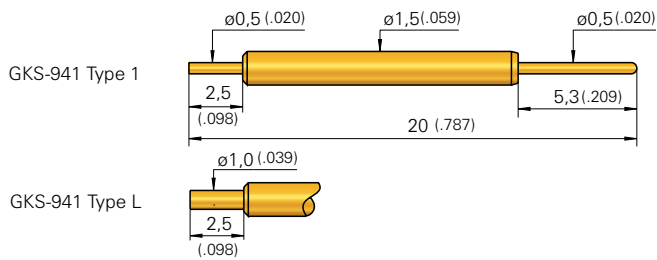

Available Tip Styles

Material	Tip Style	Plating	Further Versions	
			∅	∅ (inch)
3	01	R		
3	05	A		

GKS 064

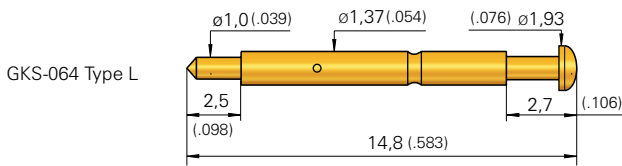

Grid:

≥ 2,54 mm

≥ 100 Mil


Installation Height: 12,3 mm (.484)

Recommended Stroke: 1,4 mm (.055)

Available Tip Styles

Material	Tip Style	Plating	Further Versions	
			∅	∅ (inch)
3	05	A		

GKS 986

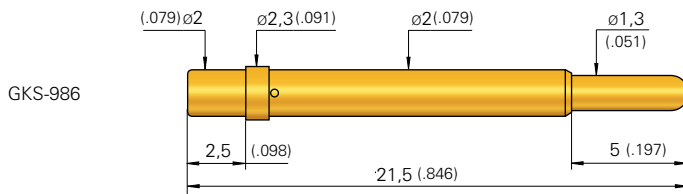

Grid:

≥ 2,54 mm

≥ 100 Mil

Installation Height: 19,0 mm (.748)

Recommended Stroke: 3,0 mm (.118)

Available Tip Styles

Material	Tip Style	Plating	Further Versions	
			∅	∅ (inch)
1	05	A		

Mechanical Data	GKS 941	GKS 064	GKS 986	Operating Temperature
Working Stroke:	3,2 mm (.126)	1,4 mm (.055)	3,0 mm (.118)	Standard: -40° up to +80° C
Maximum Stroke:	4,0 mm (.157)	1,7 mm (.067)	5,0 mm (.197)	*with 0,8 N + 1,0 N-Spring:
Spring Force at Work. Stroke:	*0,8 N (2.9oz)	0,4 N (1.4oz)	*1,0 N (3.6oz)	-100° up to +200° C
alternative:	1,7 N (6.1oz); 3,5 N (12.6oz)	0,2 N (0.7oz); 0,6 N (2.2oz)		

Electrical Data	GKS 941	GKS 064	GKS 986
Current Rating:	5 - 8 A	5 - 8 A	5 - 8 A
R_i typical:	<100 mΩ	<100 mΩ	<100 mΩ

Other Solderable Test Probes:
see GKS-913 and others on request

Materials	GKS 941	GKS 064	GKS 986
Plunger:	BeCu, gold- or rhodium-plated	see GKS 941	Brass, gold-plated
Barrel:	Brass, gold-plated	see GKS 941	Brass, gold-plated
Spring:	Steel, gold-plated *0,8 N, Stainless Steel, gold-plated	see GKS 941	Steel, gold-plated *0,8 N, Stainless Steel, gold-plated

Warning:
Soldering the Probes demands great care. High temperatures must not reach the inside of the barrel, because this could destroy the spring.

Ordering Example

	Series	Tip Material 1 = Brass 3 = BeCu	Tip Style	Tip Diameter (1/100 mm)	Plating A = Gold R = Rhodium	Spring Force (dN)	Collar Height (mm)	Type „1“ resp. „L“
Test Probe with Terminal Post ∅ 0,5 or 1,0 mm:	G K S	9 4 1	3 0 1	0 5 0	R	0 8	0 0	1 or L
Test Probe with Terminal Post ∅ 1,0 mm:	G K S	0 6 4	3 0 5	1 9 3	A	0 4	0 0	L
Test Probe GKS-986:	G K S	9 8 6	1 0 5	1 3 0	A	1 0	0 1	

Short-stroke Probes / Charging Probes


Short-stroke Probes are used as battery contacts or as a transfer pin in charging units. The Test Probes have not only a very compact design but also a short installation height in conjunction with a high spring-force.

For usage directly on the PC-Board, INGUN recommends the series **GKS-967** with a closed barrel end, so that no solder can get into the barrel during the soldering process.

Should the Test Probes need to be exchanged sometimes, then these Test Probes can be installed with a Receptacle.

Due to the extremely short design of the Receptacle (only 2.5mm long), exchange solutions are possible even when installed directly in the PC-Board.

Special versions as well as non-magnetic variants are available on request.

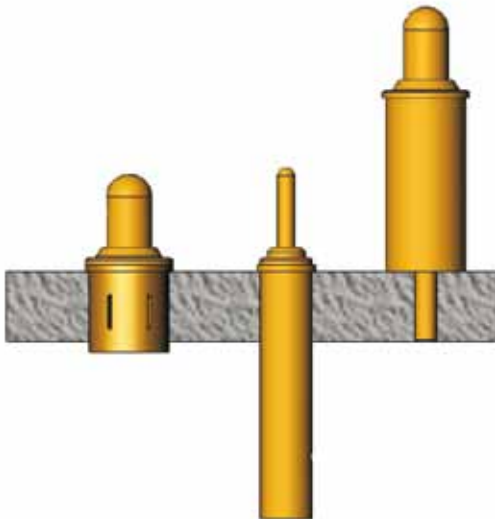

Short-stroke Probes / Charging Probes

GKS-967 / 967 M	68
GKS-761M	69
GKS-970	69
GKS-961	69

GKS 967

Short-stroke and Charging Test Probes

Grid:




≥ 3,00 mm

≥ 120 Mil

Installation Height: 2,6 resp. 4,1 mm (.102/ .161)

Recommended Stroke: 1,0 mm (.039)

Mounting and Functional Dimensions

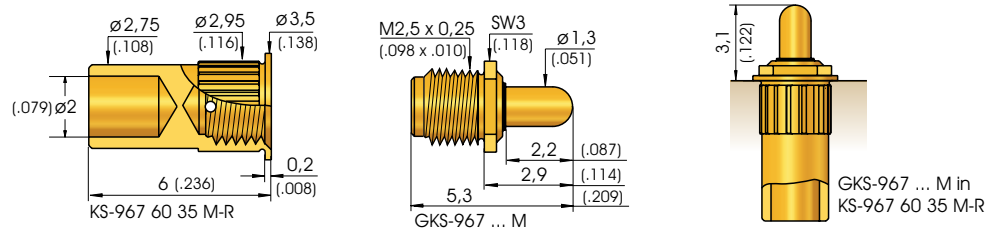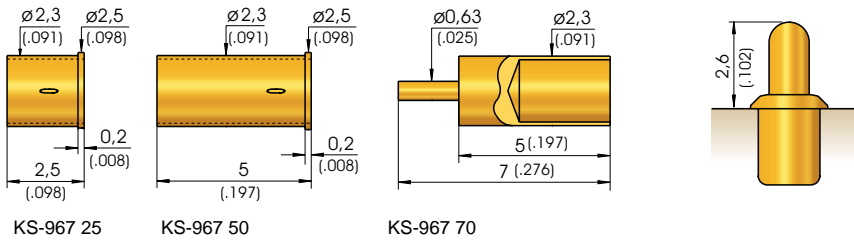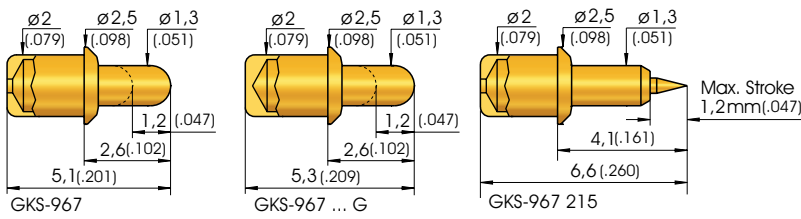

Available Tip Styles

Material	Tip Style	Plating	Further Versions	
			∅	∅ (inch)
3 02		A	∅ 1,30 (.051)	
3 03		A	∅ 1,30 (.051)	
3 04		A	∅ 1,30 (.051)	
3 05		A	∅ 1,30 (.051)	
3 06		A	∅ 1,30 (.051)	
2 15*		A	∅ 1,30 (.051)	

* Installation Height: 4,1 mm (.161)

Mechanical Data

Working Stroke: 1,0 mm (.039)
Maximum Stroke: 1,2 mm (.047)
Spring Force at Work. Stroke: 2,0 N (7.2oz)
alternative: 1,0 N (3.6oz)

Electrical Data

Current Rating: 5 - 8 A
R_i typical: < 10 mΩ
 (* < 100 mΩ)

Materials

Plunger: BeCu or steel, gold-plated
Barrel: Brass, gold-plated
Spring: Stainless Steel*, Steel, gold-plated
Receptacle: Brass, gold-plated

Mounting Hole Size

GKS 967
in CEM1 and FR4
with Receptacle: ∅ 2,28 - 2,29 mm
 (.0898 - .0902)
without Receptacle: ∅ 2,00 mm (.0787)

Mounting Hole Size

GKS 967 ... M
in CEM1 und FR4
with Receptacle: ∅ 2,92 - 2,94 mm
 (.1150 - .1157)

Operating Temperature

Standard: -40° up to +80° C
***with Special Designation „C“ or „G“:**
 -100° up to +200° C (1,0 N; 2,0 N)


Note:

GKS-967 ... M will be screwed into Receptacle KS-967 60 35 M-R; using special tools (see Page 170/171).

Recommended Screw-in Torque:
 Min.: 3 Ncm / Max.: 5 Ncm

Ordering Example

	Series	Tip Material 1 = Brass 3 = BeCu	Tip Style	Tip Diameter (1/100 mm)	Plating A = Gold R = Rhodium	Spring Force (dN)	Collar Height (mm)	Type „C“, „G“, „M“ or „MC“
Test Probe:	G K S	9 6 7	3	0 4	1 3 0	A	2 0	0 1
Receptacles:	K S - 9 6 7 2 5	K S - 9 6 7 5 0	K S - 9 6 7 7 0					
Test Probe (Page 69):	G K S	7 6 1	3	0 5	0 8 0	A	1 0	0 1 M
Receptacle (Page 69):	K S - 7 6 1 6 0 3 5 M - R							
Test Probe (Page 69):	G K S	9 7 0	3	0 5	1 3 0	A	2 0	0 1
Test Probe (Page 69):	G K S	9 6 1	3	0 5	0 5 0	A	0 6	0 1
Receptacle (Page 69):	K S - 9 6 1 3 5							

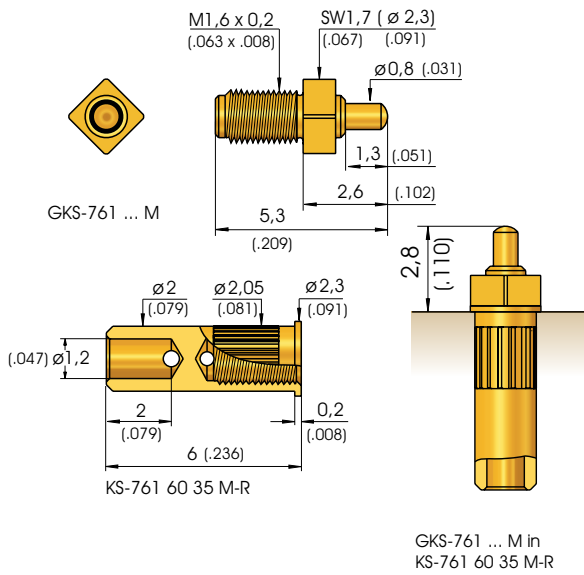

Note:
GKS-761 ... M will be screwed into Receptacle KS-761 60 35 M-R; using special tools (see Page 170/171).

Recommended Screw-in Torque:
Min.: 3 Ncm / Max.: 5 Ncm

GKS 761 M

Grid:
≥ 2,54 mm
≥ 100 Mil

Installation Height: 2,6 mm (.102) resp. 2,8 mm (.110)
Recommended Stroke: 1,0 mm (.039)


Available Tip Styles

Material	Tip Style	Plating	Further Versions	
			∅	∅ (inch)
3 05		A	∅ 0,80 (.032)	

GKS 970

Grid:
≥ 3 mm
≥ 120 Mil

Installation Height: 2,6 mm (.102) bzw. 5,1 mm (.201)
Recommended Stroke: 1,0 mm (.039) bzw. 2,8 mm (.110)

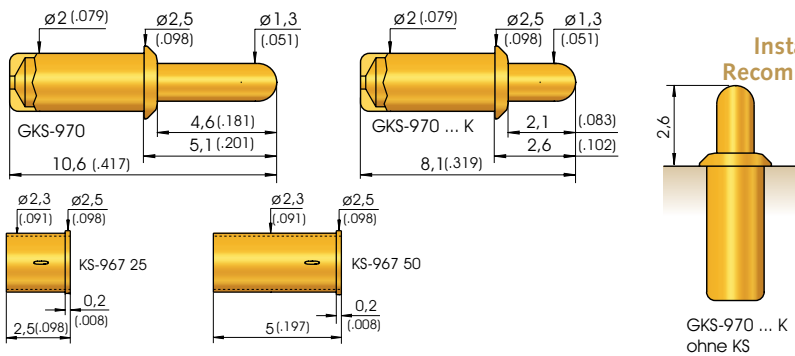


Available Tip Styles

Material	Tip Style	Plating	Further Versions	
			∅	∅ (inch)
3 05		A	∅ 1,30 (.051)	

GKS 961

Grid:
≥ 1,91 mm
≥ 75 Mil

Installation Height: 2,8 mm (.110)
Recommended Stroke: 1,0 mm (.039)

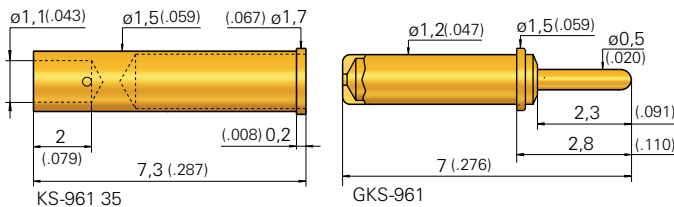

Available Tip Styles

Material	Tip Style	Plating	Further Versions	
			∅	∅ (inch)
3 05		A	∅ 0,50 (.020)	

Mechanical Data

GKS 761 M
Working Stroke: 1,0 mm (.039)
Maximum Stroke: 1,2 mm (.047)
Spring Force at Work.Stroke: 1,0 N (3.6oz)

Mechanical Data

GKS 961
Working Stroke: 1,0 mm (.039)
Maximum Stroke: 1,3 mm (.051)
Spring Force at Work.Stroke: 0,6 N (2.2oz)

Mechanical Data

GKS 970 (970...K)
Work. Stroke: 2,8 mm (.110) (1,0 mm(.039))
Max. Stroke: 3,3 mm (.130) (1,7 mm (.067))
Spring Force at Work.Stroke: 1,0 N (3.6oz); 2,0 N (7.2oz); (2,0 N (7.2oz))
alternative: *1,0 N; 2,0 N (not 970...K)

Electrical Data

GKS 761 M
Current Rating: 5 A
R_j typical: < 20 mΩ

Electrical Data

GKS 961
Current Rating: 2 A
R_j typical: < 100 mΩ

Electrical Data

GKS 970
Current Rating: 5 - 8 A
R_j typical: < 20 mΩ
* < 100 mΩ

Materials

GKS 761 M
Plunger: BeCu, gold-plated
Barrel: Brass, gold-plated
Spring: Steel, gold-plated
Receptacle: Brass, gold-plated

Materials

GKS 961
Plunger: BeCu, gold-plated
Barrel: Brass, gold-plated
Spring: Stainless Steel, gold-plated
Receptacle: Brass, gold-plated

Materials

GKS 970
Plunger: BeCu, gold-plated
Barrel: Brass, gold-plated
Spring: Stainless Steel, Steel, gold-plated
Receptacle: Brass, gold-plated

Mounting Hole Size

GKS 761 M
in CEM1 and FR4
with KS-761 60 35 M-R ∅ 2,00 - 2,02 mm (.0787 - .0866)

Mounting Hole Size

GKS 961
in CEM1 and FR4
with Receptacle: ∅ 1,49 - 1,50 mm (.0587 - .0591)
without Receptacle: ∅ 1,2 mm (.0472)

Mounting Hole Size

GKS 970
in CEM1 and FR4
with Receptacle: ∅ 2,28 - 2,29 mm (.0898 - .0902)
without Receptacle: ∅ 2,0 mm (.0787)

Operating Temperature

Standard: -40° up to +80° C

Operating Temperature

Standard: -100° up to +200° C

Operating Temperature


Standard: -40° up to +80° C
***with Special Designation „C“:** -100° up to +200° C (1,0 N; 2,0 N)



Flying Probes

For usage with Flying Probe Systems from Scorpion/Acculogic and Digitaltest INGUN recommends the series GKS-112 MD.

The geometry of the barrel was especially designed for this special Probe so that maximum precision and contacting accuracy is achieved. A special beading design enables contacting in a grid of 0.15 mm.

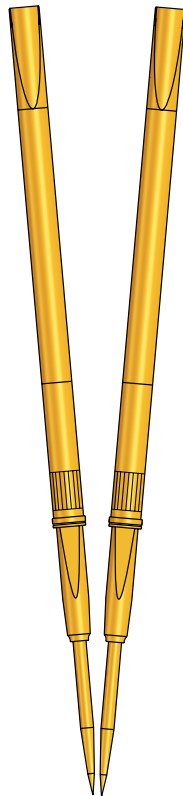

Flying Probes

GKS-112 MD

72

GKS 112 MD

Test Probes for Flying Probe
Test Systems Scorpion/Acculogic and Digitaltest

Grid:


≥ 2,54 mm

≥ 100 Mil


Installation Height: 14,7 - 21,6 mm (.579 - .850)

Recommended Stroke: 4,0 / 6,4 mm (.157 / .252)


Mounting and Functional Dimensions

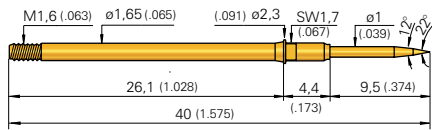


GKS-112 201 112 A xx05 MD




GKS-112 291 130 A xx05 MD




GKS-112 253 140 A xx05 MD




GKS-112 259 060 A xx05 MD

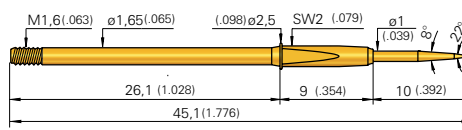


GKS-112 201 108 A xx10 MDL



GKS-112 251 108 A xx10 MDL




GKS-112 291 130 A xx10 MDL



GKS-112 303 130 A xx10 MDL

Type	Oper. stroke in mm (inch)	Max. Stroke in mm (inch)	Inst.- Height with KS in mm (inch)
01...05 MD	4,0 (.157)	8,0 (.315)	14,7 (.579)
91...05 MD	4,0 (.157)	5,3 (.209)	14,7 (.579)
53...05 MD	4,0 (.157)	5,3 (.209)	14,7 (.579)
59...05 MD	4,0 (.157)	8,0 (.315)	18,2 (.717)
01...10 MDL	4,0 (.157)	8,0 (.315)	19,8 (.780)
51...10 MDL	4,0 (.157)	8,0 (.315)	21,6 (.850)
91...10 MDL	4,0 (.157)	6,5 (.256)	19,8 (.780)
03...10 MDL	4,0 (.157)	8,0 (.315)	19,8 (.780)

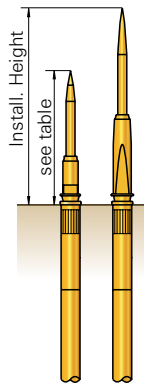

Materials

Plunger: Steel or BeCu, gold-plated
Barrel: Brass, gold-plated
Spring: Steel, gold-plated
Receptacle: Brass, gold-plated

Mechanical Data

Spring Force at Work. Stroke: 1,5 N (5.4oz)
alternative: 0,6 (2.2oz); 0,8 (2.9oz); 2,25 (8.1oz); 3,0 N (10.8oz)

Available Tip Styles

Version GKS-112 ... 05 MD

Material	Tip Style	Plating	Further Versions	
			∅	∅ (inch)
2 01		A	∅ 1,12 (.044)	
2 91		A	∅ 1,30 (.051)	
2 53		A	∅ 1,40 (.055)	
2 59		A	∅ 0,60 (.024)	

Available Tip Styles

Version GKS-112 ... 10 MDL

Material	Tip Style	Plating	Further Versions	
			∅	∅ (inch)
2 01		A	∅ 1,08 (.043)	
2 51		A	∅ 1,08 (.043)	
2 91		A	∅ 1,30 (.051)	
3 03		A	∅ 1,30 (.051)	

Note:

GKS-112 ... MD and MDL will be screwed in KS-112 ... M using special Tools > see example below and other tools on Page 170/171.

Receptacles KS-112 ... M:
see Page 132.

Recommended Screw-in Torque:
Min.: 3 Ncm / Max.: 5 Ncm

Electrical Data

Current Rating: 5 - 8 A
R_i typical: < 20 mΩ

Operating Temperature

Standard: -40° up to +80° C

Mounting Hole Size

for KS-112 xx M and KS-112 xx M-T
in CEM 1 and FR 4: ∅ 1,99 mm (.0783)
for KS-112 xx M-R
in CEM 1 and FR 4: ∅ 2,00 - 2,02 mm (.0787 - .0795)

Ordering Example

Series	Tip Material	Tip Style	Tip Diameter	Plating	Spring Force	Collar Height	Special Designation
	2 = Steel 3 = BeCu		(1/100 mm)	A = Gold	(dN)	(mm)	alternative „MDL“

Test Probe:

G K S 1 1 2 2 0 1 1 1 2 A 1 5 0 5 M D

Receptacles (see Page 132):

K S - 1 1 2 3 0 M - T K S - 1 1 2 3 0 M - R

Receptacles for Leakage test (see Page 132):

K S - 1 1 2 3 0 M

Screw-in Tool for GKS-112 ... 05 MD:

B I T - G K S 1 1 2 M - B


Screw-in Tool for GKS-112 ... 10 MDL:

B I T - G K S 1 1 2 M - B - F P

Rotating Probes

In the case of badly contaminated components or e.g. anodized aluminium and similar surfaces, common Test Probes cannot guarantee a reliable contact.

To enable reliable contacting of such surfaces INGUN recommends Rotating Probes that have a rotating plunger, which digs itself into the surface. The rotating movement of the Plunger provides reliable breaking open of the surface. However, maintenance should take into consideration that this could lead to a higher level of contamination due to particles set free during contacting.

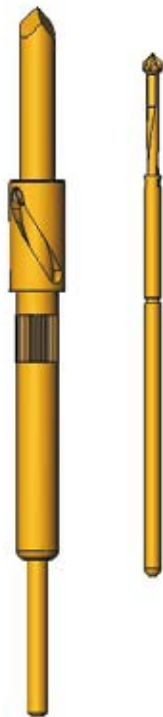

Rotating Probes

DKS-050	74
DKS-075	74
DKS-100	74
GKS-725	75
GKS-713	76

DKS Rotating Probe

Test Probes for problematic contacting demands

Grid:


≥ 1,27/1,91/2,54 mm

≥ 50/75/100 Mil

Installation Height: 16,0 mm (.630) / variable

Recommended Stroke: 4,3 mm (.169)

Mounting and Functional Dimensions

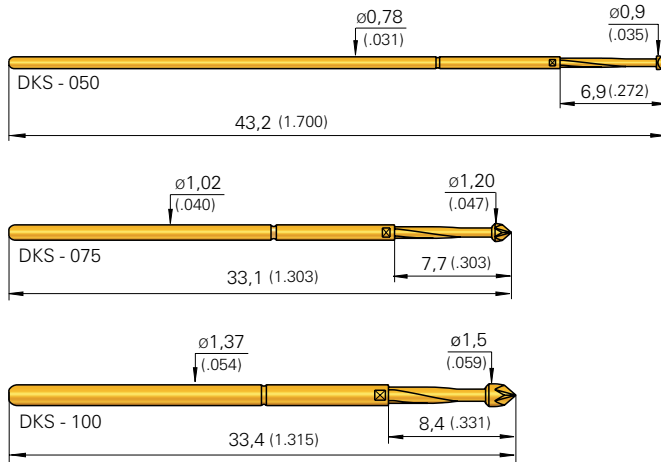

Available Tip Styles

DKS-050

Material	Tip Style	Plating	Further Versions	
			\varnothing	\varnothing (inch)
2 07		G	$\varnothing 0,90$ (.035)	

Available Tip Styles

DKS-075


Material	Tip Style	Plating	Further Versions	
			\varnothing	\varnothing (inch)
2 17		G	$\varnothing 1,20$ (.047)	
3 07		G	$\varnothing 0,76$ (.030)	

Available Tip Styles

DKS-100

Material	Tip Style	Plating	Further Versions	
			\varnothing	\varnothing (inch)
2 17		G	$\varnothing 1,50$ (.059)	
3 07		G	$\varnothing 1,00$ (.039)	

Collar Height and Installation Height, Receptacles, Electrical Data, Mounting Hole Sizes and Materials:
see compatible Standard Probe Series

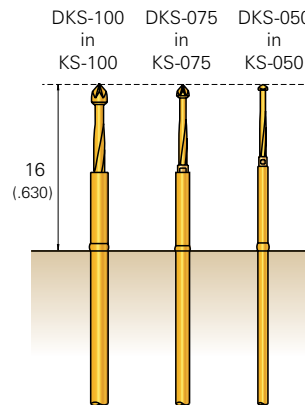

DKS	Compatible Probe	Page
DKS-050	GKS-050	23
DKS-075	GKS-075	24/25
DKS-100	GKS-100	26/27

Mechanical Data

Working Stroke: 4,3 mm (.169)

Maximum Stroke: 6,35 mm (.250)

Spring Forces of DKS-050

Spring Force at Work. Stroke: 1,5 N (5.4oz)

alternative: 2,0 N (7.2oz)

Spring Forces of DKS-075

Spring Force at Work. Stroke: 1,0 N (3.6oz)

alternative: 2,0 N (7.2oz)

Spring Forces of DKS-100

Spring Force at Work. Stroke: 1,0 N (3.6oz)

alternative: 2,0 N (7.2oz) ; 3,0 N (10.8oz)

Materials

Plunger: BeCu or Steel, gold-plated

Barrel: Nickel-Silver or Bronze, gold-plated

Spring: Steel, gold-plated

Receptacle: Nickel-Silver or Brass, gold-plated

Operating Temperature

Standard: -40° up to +80° C

Tools:

Insertion and Extraction Tools for GKS and KS see Page 118.


Ordering Example

Series	Tip Material	Tip Style	Tip Diameter (1/100 mm)	Plating	Spring Force (dN)	Collar Height (mm)
DKS	2 = Steel 3 = BeCu			G = Aurun		
DKS	050	2 07	090	G	15	00
DKS	075	2 17	120	G	20	00
DKS	100	2 17	150	G	20	00

Grid:
 ≥ 2,54 mm
 ≥ 100 Mil

Installation Height: 13,0 resp. 16,0 mm (.512/ .630)
Recommended Stroke: 4,8 resp. 4,0 mm (.189/ .157)

Mounting and Functional Dimensions

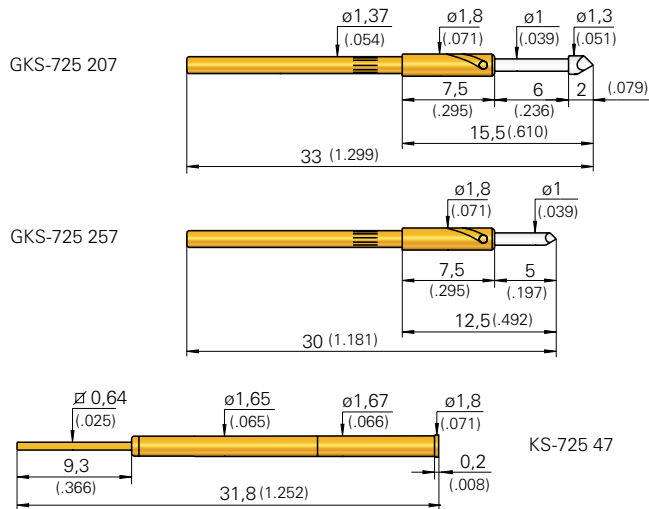


Available Tip Styles

Material	Tip Style	Plating	Further Versions	
			ϕ	ϕ (inch)
2	57* *3 mm (.118) shorter	R	$\phi 1,00$ (.039)	
2	07	R	$\phi 1,30$ (.051)	

Collar Height and Installation Height

Tip Style	Installation Height with KS (inch)	Working Stroke (inch)	Maximum Stroke (inch)
07	16 mm (.630)	4,8 (189)	6,0 mm (.236)
57*	13 mm (.512)	4,0 (157)	5,0 mm (.197)

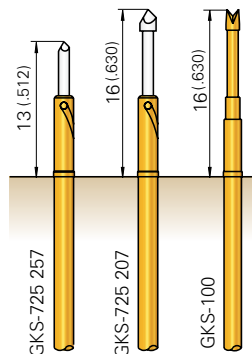

Mechanical Data

Working Stroke: see table above
Maximum Stroke: see table above
Spring Force at Work. Stroke: 1,5 N (5.4oz)

Materials

Plunger: Steel, rhodium-plated
Barrel: Brass, gold-plated
Spring: Steel, gold-plated
Receptacle: Brass, gold-plated

Electrical Data

Current Rating: 3 - 4 A
R_i typical: < 20 m Ω

Mounting Hole Size

in Material CEM 1 and FR 4:
with Receptacle: ϕ 1,67 mm (.0657)
without Receptacle: ϕ 1,37 mm (.0539)

Note:

The Knurl on the Rotating Test Probe guarantees sure fitting in the Receptacle or in the Probe Plate.

The Receptacle KS-725 47 can be used with the standard Test Probe series GKS-100 (see assembly drawing).

Tools:

Insertion and Extraction Tools for GKS and KS see Page 118.

Ordering Example

Series	Tip Material 2 = Steel	Tip Style	Tip Diameter (1/100 mm)	Plating R = Rhodium	Spring Force (dN)	Collar Height (mm)	Type
--------	---------------------------	-----------	-------------------------	------------------------	-------------------	--------------------	------

Test Probe:

G K S 7 2 5 2 0 7 1 3 0 R 1 5 0 7 S

Receptacle:

K S - 7 2 5 4 7

GKS 713

Rotating Test Probe with continuous Plunger

Grid:






≥ 4,50 mm

≥ 177 Mil

Installation Height: 13,0 resp. 18,0 mm (.512/ .709)

Recommended Stroke: 4,0 mm (.157)

Mounting and Functional Dimensions

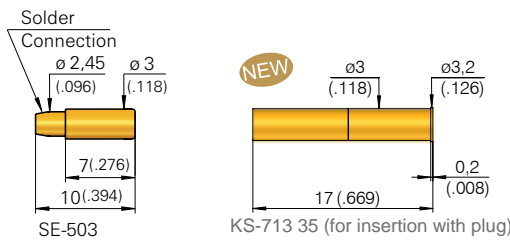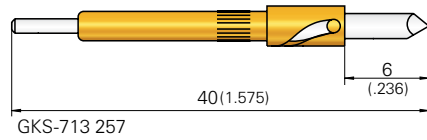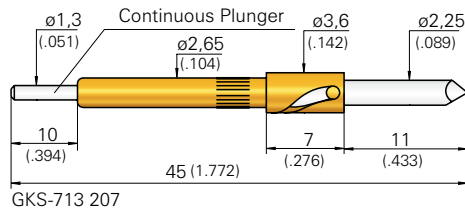

Collar Height and Installation Height

GKS	Installation Height
713 206/207	18 mm (.709)
713 256/257	13 mm (.512)

Mechanical Data

Working Stroke: 4,0 mm (.157)
Maximum Stroke: 5,0 mm (.197)
Spring Force at Work. Stroke: 1,5 N (5.4oz)
alternative: 3,0 N (10.8oz); 5,0 N (18.1oz)

Electrical Data

Current Rating, Connection to KS: 5 - 8 A
Current Rating, Conn. to Plunger: 8 A
R_i typical, Connection to KS: < 30 mΩ
R_i typical, Connection to Plunger: < 10 mΩ

Materials

Plunger: Steel, rhodium-plated
Barrel: Brass, gold-plated
Spring: Steel, gold-plated
Receptacle: Brass, gold-plated

Mounting Hole Size

with Receptacle: ∅ 2,98 - 2,99 mm (.1173 - .1177)
without Receptacle: ∅ 2,66 mm (.1047)

Note:

The Knurl on the Rotating Test Probe guarantees sure fitting in the Receptacle or in the Probe Plate.

Tools:

Insertion and Extraction Tools for GKS and KS see Page 118.

Material	Tip Style	Plating	Further Versions	
			∅	∅ (inch)
2 07		R		
2 57*		R		
2 06		R	4,00	(.157)
2 56*		R		

* 5 mm (.197) shorter

Ordering Example

Series Tip Material Tip Style Tip Diameter (1/100 mm) Plating R = Rhodium Spring Force (dN) Collar Height (mm)

Test Probe:

G K S 7 1 3 2 0 6 2 2 5 R 1 5 0 7

Receptacle:

K S - 7 1 3 2 3 K S - 7 1 3 3 5

Lamellar Plug:

(for plugging onto the end of the Plunger)


S E - 5 0 3

Switching Probes

INGUN Switching Probes are so-called "closing probes", i.e. the interrupted circuit is closed when the plunger is activated. The plunger is pushed down past the actual switching point to provide the necessary contact force. The stated rated current can be transferred in the state 2 (closed).

Application Examples

- Presence-check of components on a PC-Board (see following section)
- Presence-check of the PC-Board on the Test Fixture
- Compact switching unit for assembly in many areas
- Signal input for procedure check of moving items on automates and other machines
- Electroless check with insulated tip

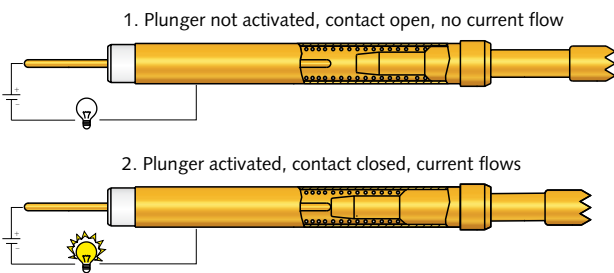


"Quick-exchange" Receptacle for Switching Probes

To simplify the changing of Switching Probes - especially in the case of maintenance – so-called "Quick-exchange Receptacle" are available for the most common series (i.e. SKS-215 and SKS-415/465).

Advantages

- One-time wiring of the Receptacle at the time of customizing the Test Fixture or Unit
- Insertion of the SKS from above (Test Fixture need not be opened)
- Reduction of the maintenance costs
- No wiring faults in the case of maintenance

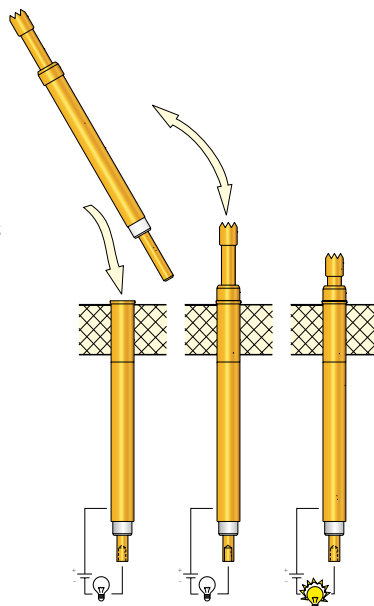

Switching Probes

SKS-100	78
SKS-215	79
SKS-415	80
SKS-425	81
SKS-419	82
SKS-429	82

Screw-in SKS from page 147 on

SKS 100

Switching Probe

Grid:




≥ 2,54 mm

≥ 100 Mil

Installation Height: 16,4 / 19.1 mm (.646/ .752)

Switching Path: 4,0 mm (.157)

Mounting and Functional Dimensions

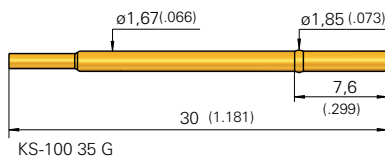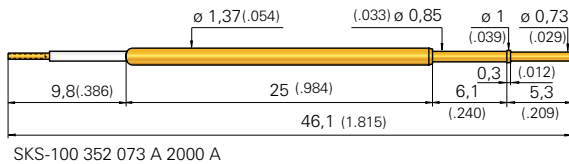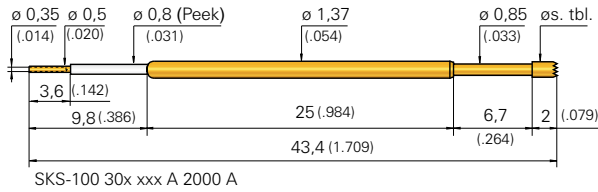

Collar Height and Installation Height

To adjust the Installation Height Receptacles with a Press-ring are used. The Receptacles can be inserted up to the Press-ring or with the Press-ring pressed into the mounting hole.

Tip Style	Installation Height with KS (inch)	Maximum Stroke (inch)
02	16,4 mm (.646) / var.	6,3 mm (.248)
06		
52	19,1 mm (.752) / var.	6,0 mm (.236)

Mechanical Data

Switching Path: 4,0 mm (.157) ± 0,2 (.008)

Recomm. Working Stroke: 5,0 mm (.197)

Maximum Stroke: 6,0 mm (.236)
resp. 6,3 mm (.248)

Spring Force at Switch. Point: 1,0 N (3.6oz)

Spring Force at Work. Stroke: 2,0 N (7.2oz)

Electrical Data

Current Rating: 3 A
(see page 77)

Materials

Plunger: BeCu, gold-plated

Barrel: Bronze, gold-plated

Spring: Steel, gold-plated

Receptacle: Nickel-silver, gold-plated

Contact Terminal: Brass, gold-plated

Insulator: Peek

Mounting Hole Size

when pressing the Pressring into the Mounting hole

in CEM 1 and FR 4: ∅ 1,70 - 1,75 mm (.0669 - .0689)

Press-ring as a Collar-stop

in CEM 1: ∅ 1,68 - 1,69 mm (.0661-.0665)


in FR 4: ∅ 1,69 - 1,70 mm (.0665-.0669)

Available Tip Styles

Material	Tip Style	Plating	Further Versions	
			∅	∅ (inch)
0 02		A		
3 02		A		
3 06		A		
3 52		A		

SKS-100 X02 100 ...
SKS-100 306 100 ...
in KS-100 35 G

SKS-100 352 073 ...
in KS-100 35 G

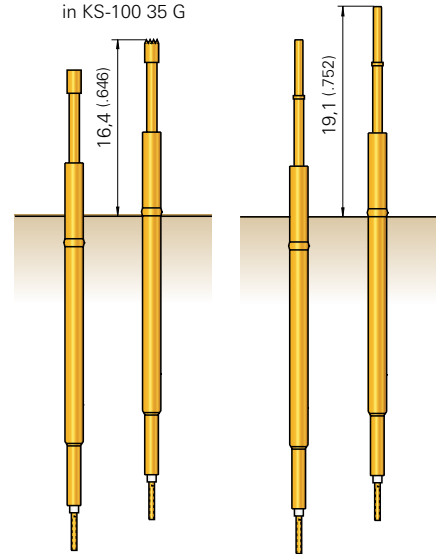

Application Areas:

- combined component test with presence check
- active switching element

Warning:

Do not solder the cable to the crimp points of the Receptacle.

Tools:

Insertion and Extraction Tools for SKS and KS see Page 118.

Ordering Example

Series	Tip Material 0 = Delrin 3 = BeCu	Tip Style	Tip Diameter (1/100 mm)	Plating A = Gold	Spring Force at Working Stroke (dN)	Collar Height (mm)	Type
--------	--	-----------	----------------------------	---------------------	---	-----------------------	------

Test Probe:

SKS 100 3 06 100 A 20 00 A

Receptacle:


KS-100 35 G

Grid:
 ≥ 2,54 mm
 ≥ 100 Mil


Installation Height: 10,0 mm (.394)
Switching Path: 1,5 mm (.059)

Mounting and Functional Dimensions


SKS-215

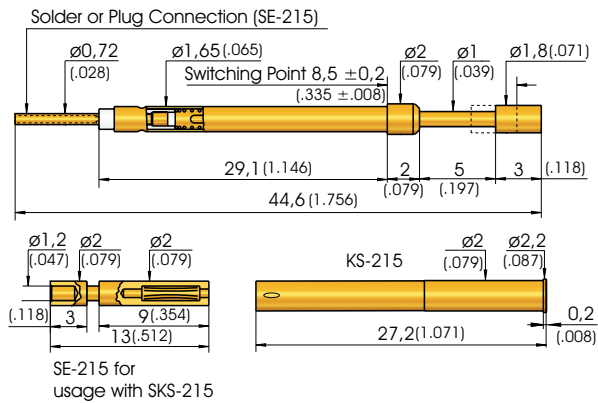

SKS-215 ... E

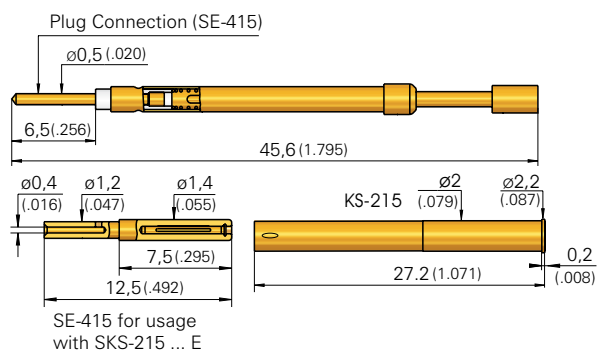

Quick-exchange System with SKS-215 ... E

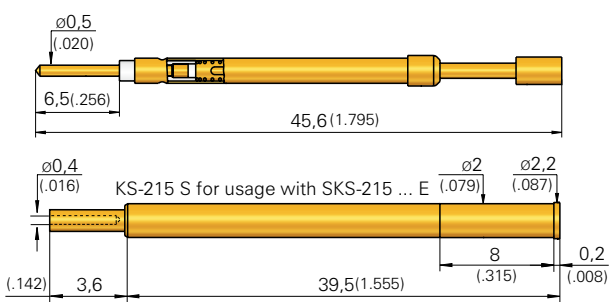

Mechanical Data

Switching Path: 1,5 mm (.059) ± 0,2 (.008)
Maximum Stroke: 5,0 mm (.197)
Spring Force: 0,8 / 1,5 / 3,0 N
Spring Force at Switch.Point: 0,23N (0.8oz); 0,45 N (1.6oz); 0,9 N (3.2oz)
Spring Force at 80% Stroke: 0,8 N (2.9oz); 1,5 N (5.4oz); 3,0 N (10.8oz)

Electrical Data

Current Rating: 3 A
 (see page 77)

Materials

Plunger: BeCu, gold- or nickel-plated (or gold-plated with Insulator Cap)
Barrel: Brass, gold-plated
Spring: Steel, gold-plated
Receptacle: Brass, gold-plated
Contact Terminal: Brass, gold-plated

Mounting Hole Size

with Receptacle: s. KS-112 Page 50
without Receptacle: ∅ 1,65 mm (.0650)

Available Tip Styles

Material	Tip Style	Plating	Further Versions	
			∅	∅ (inch)
0 02		A		
3 02		A	1,00	(.039)
3 03		A		
NEW 3 05		A	0,80	(.031)
3 05		A		
3 06		N		
NEW 3 19		A		

Collar Height and Installation Height

The Installation Height of the Tip (Dimension without KS) is determined by the Collar Height.

Collar Height	Installation Height (without Receptacle)
02	10,0 mm (.394)

Application Areas:

- combined component test with presence check
- active switching element

Warning:

Do not solder the cable to the crimp points of the Receptacle.

The Receptacle KS-215 S enables easy changing of the Switching Probe without removing the wiring connection. This Receptacle can only be used with SKS-215 ... E.

Note:

The special Tool "SW/ZW GKS-112" must be used to install the Switching Probe (see Page 118).

Note:

Screw-in Version see SKS-215 M on Page 148.

Ordering Example

	Series	Tip Material	Tip Style	Tip Diameter (1/100 mm)	Plating	Spring Force at 80% Stroke (dN)	Collar Height (mm)	Type (alternative E)
Test Probe:	SKS	215	302	180	A	30	02	
Receptacle:	KS-215		KS-215 S					
Lamellar Plug:	SE-215							

SKS 415

Switching Probe

Grid:

≥ 3,50 mm


≥ 140 Mil

Installation Height: 10,2 - 24,7 mm (.402 - .972)


Switching Path: 1,7 mm (.067)

Mounting and Functional Dimensions


SKS-415 ... 2

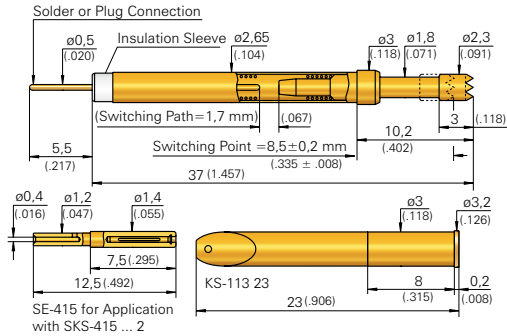

SKS-415 ... E

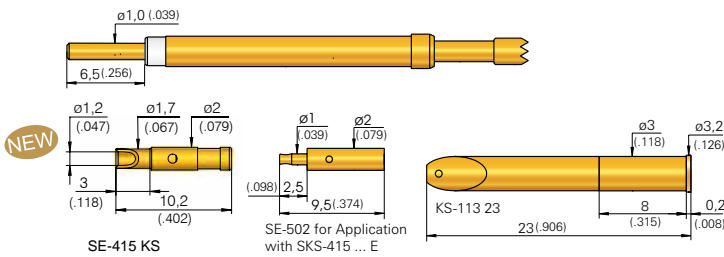

Quick-exchange System with SKS-415 ... 02 E

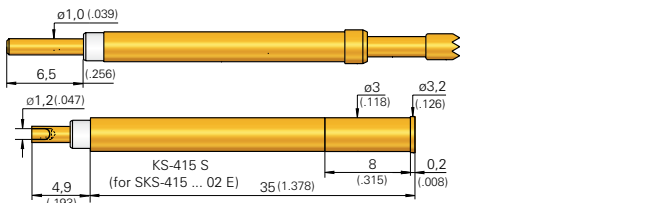

Collar Height	Installation Height (without KS) with Tip Style 02/03/06	Installation Height (without KS) with Tip Style 53/56
02	10,2 mm (.402)	16,7 mm (.657)
05**	13,2 mm (.520)	19,7 mm (.776)
10**	18,2 mm (.717)	24,7 mm (.972)

** not usable with KS-415 S

Mechanical Data

Switching Path: 1,7 mm (.067) ± 0,2 (.008)
Maximum Stroke: 5,2 mm (.205)
Spring Force at Switch.Point: 0,7 N (2.5oz)
Spring Force 80% Stroke: 2,3 N (8.3oz)

Materials

Plunger: BeCu, gold-plated (or gold-plated with Insulator Cap)
Barrel: Brass, gold-plated
Spring: Steel, gold-plated
Receptacle: Brass, gold-plated

Electrical Data

Current Rating: 5 A (see page 77)

Mounting Hole Size

with Receptacle: ∅ 2,98 - 2,99 mm (.1173 - .1177)
without Receptacle: ∅ 2,65 mm (.1043)

Ordering Example

	Series	Tip Material	Tip Style	Tip Diameter (1/100 mm)	Plating	Spring Force at 80% Stroke (dN)	Collar Height (mm)	Type (alternative E)
Test Probe:	SKS	4	15	3	06	230	A	23
Receptacle:	KS-113	23	KS-415	S				
Lamellar Plugs:	SE-415	SE-502	SE-415	KS				

Available Tip Styles

Material	Tip Style	Plating	Further Versions	
			∅	∅ (inch)
0 02		A	5,00 2,30	(.197) (.091)
NEW 3 02		A		
3 02		A		
3 03		A		
3 06		A		
NEW 3 06		A		
3 06		A	4,00	(.157)
NEW 3 19		A		
3 53*		A		
3 56*		A		
NEW 3 56*		A		
3 56*		A		

* Tip Length 9,5 mm (.374)

Collar Height and Installation Height

To adjust the Installation Height (Dimension without KS) Test Probes with different Collar Heights are available.

Note:


The Receptacle can be used from Grid 4,50 mm (177 Mil) up.

Screw-in Version:

see SKS-465 MF and SKS-465 SF on Page 149/150.
 The Receptacle KS-415 S enables easy changing of the Switching Probe SKS-415 ... 02 E without removing the wiring connection.

Tools:



Insertion and Extraction Tools for SKS and KS see Page 118.





Grid:
 ≥ 3,50 mm
 ≥ 140 Mil

Installation Height: 13,0 mm (.512)
Switching Path: 2,4 mm (.094)

Mounting and Functional Dimensions

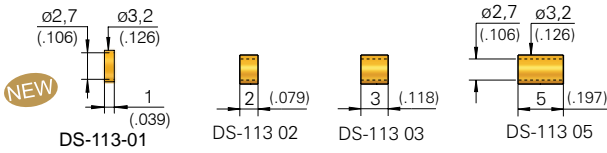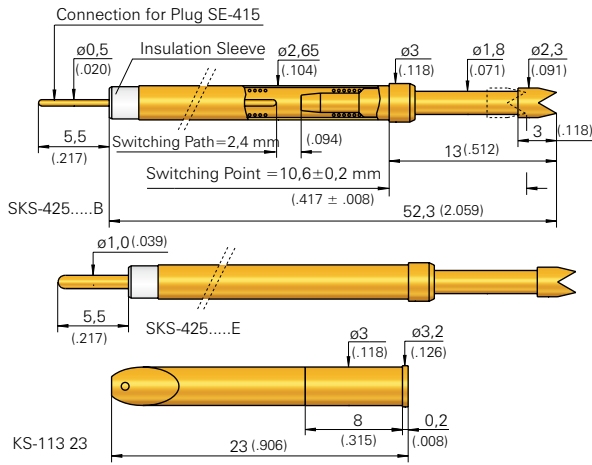

SE-415 for usage with SKS-425 ... B SE-502 for usage with SKS-425 ... E

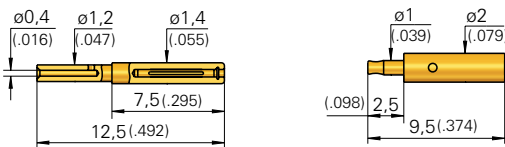

Collar Height and Installation Height

The Installation Height of the Tip (Dimension without KS) is determined by the Collar Height.

Collar Height	Installation Height (without Receptacle)
02	13,0 mm (.512)

Mechanical Data

Switching Path: 2,4 mm (.094) ± 0,2 (.008)
Maximum Stroke: 8,0 mm (.315)
Spring Force at Switch Point: 0,9 N (3.2oz)
Spring Force 80% Stroke: 2,5 N (9.0oz)

Electrical Data

Current Rating: 5 A
 (see page 77)

Materials

Plunger: BeCu, gold-plated
 (or gold-plated with Insulator Cap)
Barrel: Brass, gold-plated
Spring: Steel, gold-plated
Receptacle: Brass, gold-plated

Mounting Hole Size

with Receptacle: ∅ 2,98 - 2,99 mm
 (.1173 - .1177)
without Receptacle: ∅ 2,65 mm (.1043)

Note:

The Receptacle can be used from Grid 4,5 mm (180 Mil) up.

Tools:

Insertion and Extraction Tools for GKS and KS see Page 118.

Ordering Example

	Series	Tip Material 0 = Delrin 3 = BeCu	Tip Style	Tip Diameter (1/100 mm)	Plating A = Gold	Spring Force at 80% Stroke (dN)	Collar Height (mm)	Type (alternative E)				
Test Probe:	SKS	4	25	3	04	230	A	2502B				
Receptacle:	KS	1	13	23								
Spacers:	DS	1	13	02	DS	1	13	03	DS	1	13	05
Lamellar Plugs:	SE	4	15	SE	5	02						

e-type® Probes
 ICT / FCT
 Bead Probes
 Fine Pitch
 Metric Stand.
 Solderable
 Short-stroke
 Flying Probes
 DKS
 SKS
 PK / PSK
 RF / Dipole Test Probes
 HSS
 Fixture customizing
 Tools
 Cable Test Probes

SKS 419 / 429

Switching Probe with long Stroke, high Stability

Grid:





≥ 7,5/10,0 mm

≥ 300/400 Mil

Installation Height: 27,0 mm (1.063)

Switching Path: 2,0 mm (.079)

Mounting and Functional Dimensions

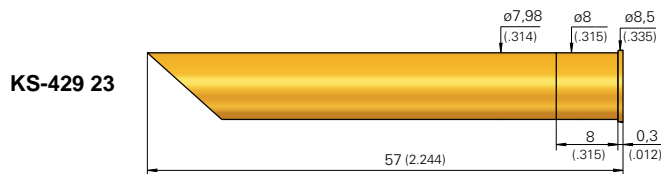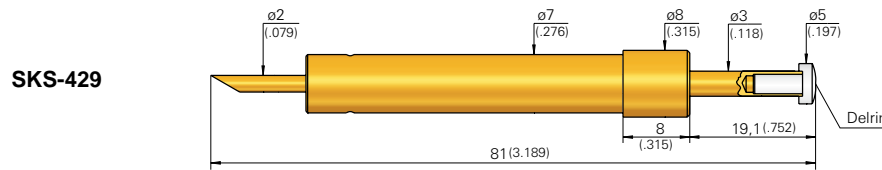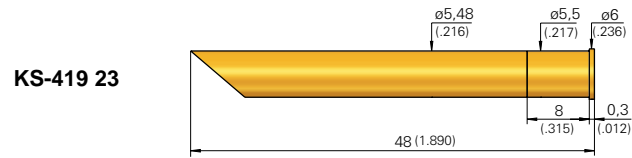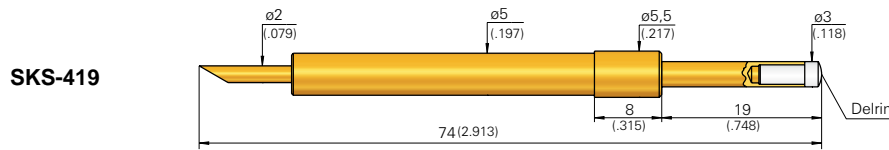

SKS 419

Mechanical Data

Switching Path: 2,0 mm (.079) ± 0,2 (.008)
Maximum Stroke: 14,0 mm (.551)
Spring Force at Switch.Point: 2,6 N (9.4oz)
Spring Force 80% Stroke: 5,2 N (18.8oz)
Spring Force max. Stroke: 6,5 N (26.0oz)

Electrical Data

Current Rating: 5 A
 (see Page 77)

Mounting Hole Size

with Receptacle: ø 5,49 mm (.2161)
without Receptacle: ø 5,00 mm (.1969)

Materials

Plunger: BeCu, gold-plated
 with Insulator Cap (Delrin)
Barrel: Brass, gold-plated
Spring: Steel, gold-plated
Receptacle: Brass, gold-plated

SKS 429

Mechanical Data

Switching Path: 2,0 mm (.079) ± 0,2 (.008)
Maximum Stroke: 16,0 mm (.630)
Spring Force at Switch.Point: 2,9N (10.5oz)
Spring Force 80% Stroke: 6,4 N (23.2oz)
Spring Force max. Stroke: 8,0 N (31.0oz)

Electrical Data

Current Rating: 5 A
 (see page 77)

Mounting Hole Size

with Receptacle: ø 7,99 mm (.3146)
without Receptacle: ø 7,00 mm (.2756)

Materials

Plunger: BeCu, gold-plated
 with Insulator Cap (Delrin)
Barrel: Brass, gold-plated
Spring: Steel, gold-plated
Receptacle: Brass, gold-plated

Tools:

The special Insertion tools for SKS must be used to install the Switching Probes (see Page 118).

Ordering Example

	Series	Tip Material 0 = Delrin	Tip Style	Tip Diameter (1/100 mm)	Plating A = Gold	Spring Force at max. Stroke (dN)	Collar Height (mm)								
Test Probe:	SKS	4	1	9	0	0	5	3	0	0	A	6	5	0	8
Test Probe:	SKS	4	2	9	0	0	5	5	0	0	A	8	0	0	8
Receptacle for SKS-419:	KS	4	1	9	2	3									
Receptacle for SKS-429:	KS	4	2	9	2	3									

Pneumatic Test Probes and Switching Probes

Pneumatic Test Probes are operated with compressed air. Before activation, the plunger is in the home position. On applying the compressed air, the plunger shoots out. The spring inside the barrel retrieves the plunger after releasing the compressed air.

Application Examples

- Individual contacting of single test points
- Can be controlled individually or in groups
- Contacting of test points, which are difficult to access
- Flexible application as a type of push-rod in Test Fixtures
- Movement of components in explosive areas (instead of Electro-Motors)

Advantages

- Fixtureless contacting possible
- Later enhancement of test points (layout change) possible
- Individual set-up of the test procedures possible
- Quick set-up of flexible test requirements
- In the case of a small number of test points, cheap alternative to a Test Fixture
- High level of contacting accuracy due to short installation height and stationary basic set-up

1. Compressed air 0 bar, Plunger at home-position



2. Compressed air 6 bar, Plunger shoots out, working-position



Pneumatic Test Probes / Switching Probes

PKS-355 M	84
PKS-388 M	85
PSK-350 M Pneumatic Switching Probe	86
PKS-171	87
PKS-200	88
PKS-220	89
PKS-299	90
PKS-300	91
PKS-399	92
PKS-420	93
PKS Accessories	94+95

PKS 355 M

Screw-in Pneumatic Test Probe

Grid:



≥ 3,5 mm

≥ 140 Mil




Installation Height (with KS): 5,7 mm (.224)

Recommended Stroke: 6,0 mm (.236)

Mounting and Functional Dimensions

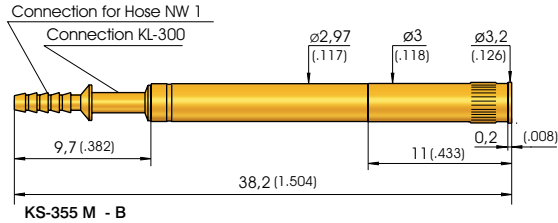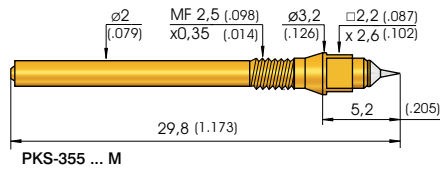

Assembly PKS-355 M in KS-355 M-B

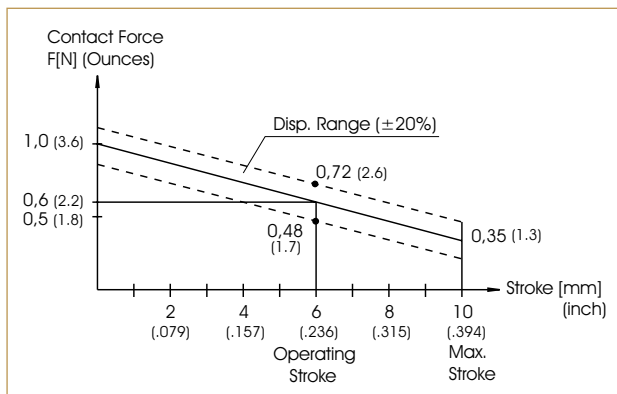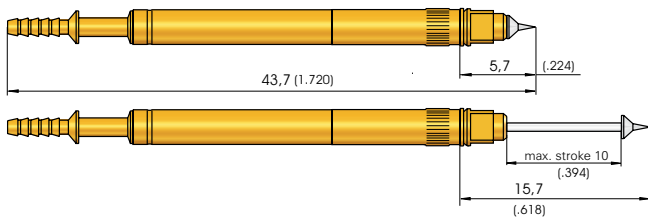

Available Tip Styles

Material	Tip Style	Plating	Further Versions	
			∅	∅ (inch)
2 01 ***		R	∅ 1,50 (.059)	
2 04 **		R	∅ 1,30 (.051)	
2 06 **		A	∅ 1,00 (.039)	
2 33 **		A	∅ 1,30 (.051)	
2 91 *		A	∅ 1,00 (.039)	

Collar Diameter:

* = 1,20 mm (.047)

** = 1,30 mm (.051)

*** = 1,50 mm (.059)

**** = 1,80 mm (.071)

Note:

Electrical and pneumatic connections are carried out only once at the time of customizing. The exchangeable unit PKS-355 M is screwed into the ready-wired and pneumatically connected up Receptacle KS-355 M-B. The Test Probe can be changed from above. The Test Fixture must not be opened. The wiring and pneumatic connections are not affected.

Note:

Pneumatic Accessories and general Instructions see Page 94/95.

Note to PKS-355 and KS-355 M-B:

PKS-355 are screwed into KS-355 using special tools (see Page 170/171.).

Recommended Screw-in Torque:
Min.: 10 Ncm / Max.: 20 Ncm

Mechanical Data

Working Stroke: 6,0 mm (.236)

Maximum Stroke: 10,0 mm (.394)

Cont. Force at Work.Stroke: 0,6 N (2.2oz)

Operating Medium: Compressed Air (filtered, oil-free)

Operating Pressure: 6 bar (86 psi)

Materials

Plunger: Steel, rhodium- or gold-plated

Barrel: Brass, gold-plated

Restoring Spring: Steel, gold-plated

Receptacle: Brass, gold-plated

O-Rings: Perbunan

Electrical Data

Current Rating: 1 - 2 A

R_i typical: < 30 mΩ

Mounting Hole Size for Receptacle

in CEM 1: ∅ 3,15 - 3,17 mm (.1240-.1248)

in FR 4: ∅ 3,17 - 3,18 mm (.1248-.1252)

Ordering Example

Series	Tip Material 2 = Steel	Tip Style	Tip Diameter (1/100 mm)	Plating A = Gold R = Rhodium	Spring Force (dN)	Collar Height (mm)	Type
--------	---------------------------	-----------	----------------------------	------------------------------------	----------------------	-----------------------	------

Test Probe:

PKS 355 2 01 150 R 06 02 M

Receptacle for PKS-355 M:

KS - 355 M - B


Clip Connection with Solder Terminal for KS-355:

KL - 300




Grid:
 ≥ 5,08 mm
 ≥ 200 Mil

Installation Height (with KS): 6,1 mm (.240)
Recommended Stroke: 12,0 mm (.472)

Mounting and Functional Dimensions

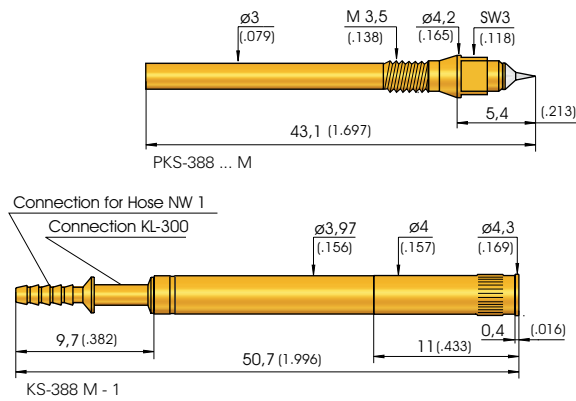

Assembly PKS-388 M in KS-388 M-1

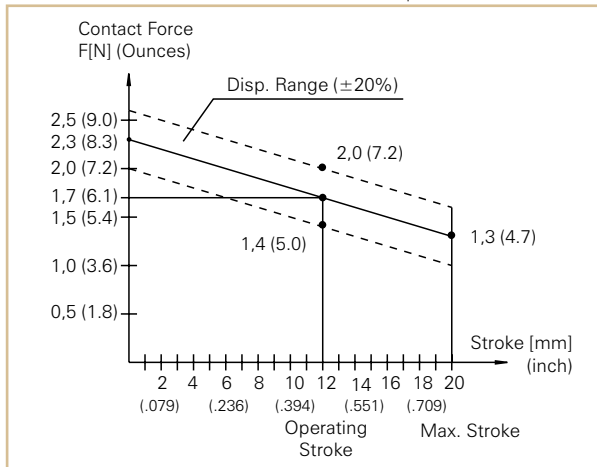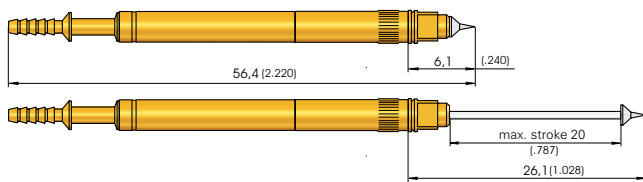

Available Tip Styles

Material	Tip Style	Plating	Further Versions	
			∅	∅ (inch)
2	01**	R	∅ 2,00 (.079)	
3	02	A	∅ 2,50 (.098)	
2	04**	R	∅ 1,30 (.051)	2,00 (.079)
2	15**	A	∅ 2,00 (.079)	

* pressed-in HM-Tip, Installation Height with KS: 7,1 mm (.280)
 ** Collar Diameter: 2,0 mm (.0799)

Available Tip Styles

Special Versions without Collar

Material	Tip Style	Plating	Further Versions	
			∅	∅ (inch)
2	01***	R	∅ 1,50 (.059)	
2	04***	R	∅ 1,50 (.059)	
3	05***	A	∅ 1,30 (.051)	

*** Shaft Diameter 1,50 mm (.059)

Note:

Electrical and pneumatic connections are carried out only once at the time of customizing. The exchangeable unit PKS-388 M is screwed into the ready wired and pneumatically connected up Receptacle KS-388 M-1. The Test Probe can be changed from above. The Test Fixture must not be opened. The wiring and pneumatic connections are not affected.

Note:

Pneumatic Accessories and general Instructions see Page 94/95.

Note to PKS-388 and KS-388 M-1:

PKS-388 are screwed into KS-388 M-1 using special tools (see Page 170/171).

Recommended Screw-in Torque:
 Min.: 10 Ncm / Max.: 20 Ncm

Mechanical Data

Working Stroke: 12,0 mm (.472)
Maximum Stroke: 20,0 mm (.787)
Cont. Force at Work. Stroke: 1,7 N (6.1oz)
Operating Medium: Compressed Air (filtered, oil-free)
Operating Pressure: 6 bar (86 psi)

Materials

Plunger: Steel or BeCu, rhodium- or gold-plated
Barrel: Brass, gold-plated
Restoring Spring: Steel, gold-plated
Receptacle: Brass, gold-plated
O-Rings: Perbunan

Electrical Data

Current Rating: 2 - 3 A
R_i typical: < 30 mΩ

Mounting Hole Size

in CEM 1 and FR 4: ∅ 4,00 - 4,02 mm (.1575 - .1583)

Ordering Example

Series	Tip Material 2 = Steel 3 = BeCu	Tip Style	Tip Diameter (1/100 mm)	Plating A = Gold R = Rhodium	Spring Force (dN)	Collar Height (mm)	Type
--------	---------------------------------------	-----------	----------------------------	------------------------------------	----------------------	-----------------------	------

Test Probe:

PKS 388 2 01 200 R 17 02 M

Receptacle for PKS-388:

KS - 388 M - 1

Clip Connection with Solder Terminal for KS-388:

KL - 300

PSK 350 M

Screw-in Pneumatic Switching Probe (opener)

Grid:



≥ 3,5 mm

≥ 140 Mil




Installation Height (with KS): 5,7 mm (.224)

Switching Path: 6,0 mm (.236)

Mounting and Functional Dimensions

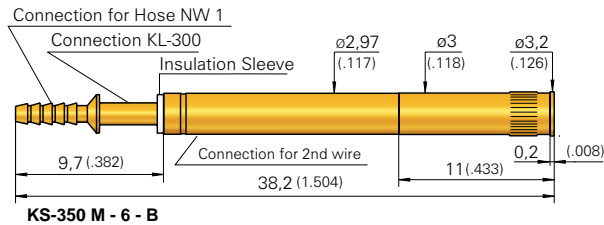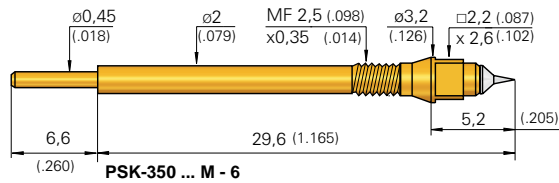

Assembly PSK-350 M in KS-350 M-6-B

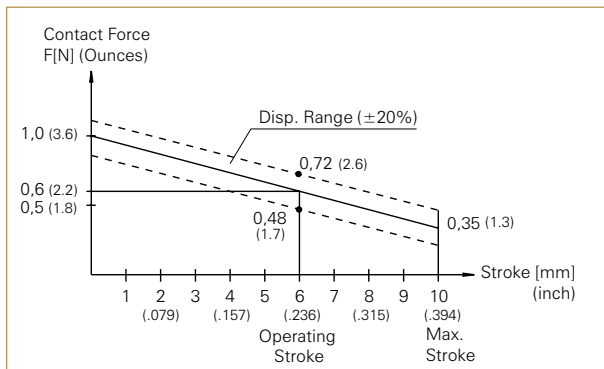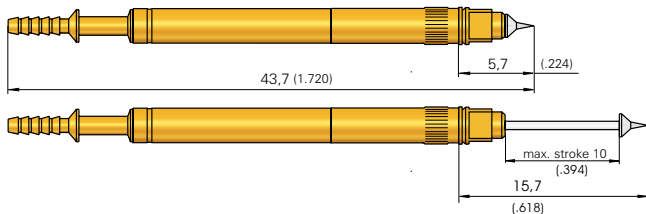

Available Tip Styles

Material	Tip Style	Plating	Further Versions	
			∅	∅ (inch)
2 01 ***		R	∅ 1,50 (.059)	
3 02		A	∅ 2,00 (.079)	
2 04 **		R	∅ 1,30 (.051)	
2 06 **		A	∅ 1,00 (.039)	
2 33 **		A	∅ 1,30 (.051)	
2 91 *		A	∅ 1,00 (.039)	

Collar Diameter:

* = 1,20 mm (.047)

** = 1,30 mm (.051)

*** = 1,50 mm (.059)

**** = 1,80 mm (.071)

Functionality:

The pneumatic Switching Probe PSK 350 is designed as an „opener“. In the home position there is an electric contact between the Pneumatic Probe and the Terminal of the Receptacle. After 6 mm (.236) Stroke this connection is interrupted.

Note:

Electrical and pneumatic connections are carried out only once at the time of customizing. The exchangeable unit PSK-350 M is screwed into the ready wired and pneumatically connected up Receptacle KS-350 M-6-B. The Test Probe can be changed from above. The Test Fixture must not be opened. The wiring and pneumatic connections are not affected.

Pneumatic Accessories and general Instructions see Page 94/95).

Note to PSK-350 + KS-350 M-6-B:

PSK-350 are screwed into KS-350 using special tools (see Page 170/171).

Recommended Screw-in Torque:
Min.: 10 Ncm / Max.: 20 Ncm

Mechanical Data

Switch. Path/Work. Stroke: 6,0 mm (.236)

Maximum Stroke: 10,0 mm (.394)

Cont. Force at Work.Stroke: 0,6 N (2.2oz)

Operating Medium: Compressed Air

(filtered, oil-free)

Operating Pressure: 6 bar (86 psi)

Materials

Plunger: Steel, rhodium- or gold-plated

Barrel: Brass, gold-plated

Restoring Spring: Steel, gold-plated

Receptacle: Brass, gold-plated

O-Rings: Perbunan

Insulation: Peek

Terminal: Brass, gold-plated

Electrical Data

Current Rating: 1 - 2 A

R_i typical: < 30 mΩ

Mounting Hole Size for Receptacle

in CEM 1: ∅ 3,15 - 3,17 mm (.1240-.1248)

in FR 4: ∅ 3,17 - 3,18 mm (.1248-.1252)

Ordering Example

Series	Tip Material	Tip Style	Tip Diameter (1/100 mm)	Plating	Spring Force (dN)	Collar Height (mm)	Type
	2 = Steel 3 = CuBe			A = Gold R = Rhodium			

Test Probe:

PSK 350 2 04 130 R 06 02 M-6

Receptacle for PSK-350 ... M-6:

KS - 350 M - 6 - B



Clip-Connection with Solder Terminal for KS-350:

KL - 300

Grid:
 ≥ 1,91 mm
 ≥ 75 Mil

Installation Height: 5,5 mm (.217)
Recommended Stroke: 6,0 mm (.236)





Mounting and Functional Dimensions

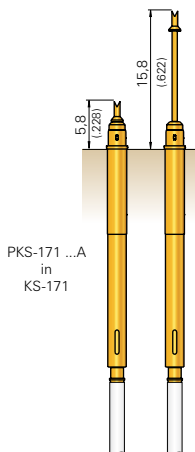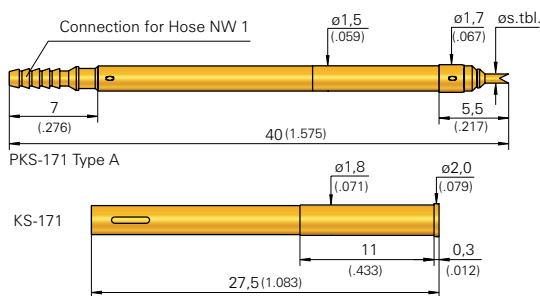

Available Tip Styles

Material	Tip Style	Tip Diameter	Plating	Further Versions	
				Ø	Ø (inch)
2 04*		Ø 1,00 (.039)	A		
2 14*		Ø 0,50 (.020)	A		
3 19		Ø 1,50 (.059)	A		
2 91*		Ø 1,00 (.039)	A		

* Diameter of Collar: 1,3 mm (.051)

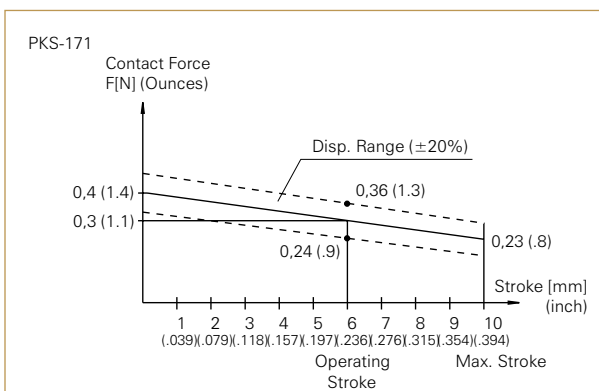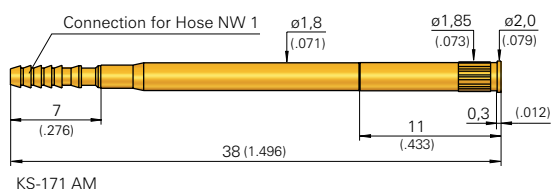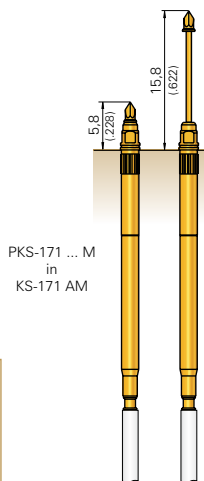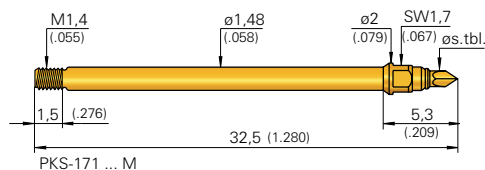

Note to PKS-171 M and KS-171 AM:
 PKS-171 M are screwed into KS-171 AM using special tools (see Page 170/171).

Recommended Screw-in Torque:
 Min.: 2 Ncm / Max.: 3 Ncm

Warning:
 Do not solder the cable to the crimp points of the Receptacle.

Note:
 The assembly in Grid 1,91 mm (75 Mil) is only possible up to a double row, and then only without use of Receptacles.

Note:
 The Receptacles can be used from Grid 2,54 mm (100 Mil) up.

Note:
 Pneumatic Accessories and general Instructions see Page 94/95.

Mechanical Data

Switch. Path/Work. Stroke: 6,0 mm (.236)
Maximum Stroke: 10,0 mm (.394)
Cont. Force at Work.Stroke: 0,3 N (1.1oz)
Operating Medium: Compressed Air (filtered, oil-free)
Operating Pressure: 6 bar (86 psi)

Electrical Data

Current Rating: 1 - 2 A
R_i typical: < 30 mΩ

Materials

Plunger: Steel, gold-plated
Barrel: Brass, gold-plated
Restoring Spring: Steel, gold-plated
Receptacle: Brass, gold-plated
O-Rings: Perbunan

Mounting Hole Size

with Receptacle KS-171: Ø 1,79 - 1,80 mm (.0705 - .0709)
with Receptacle KS-171 AM: Ø 1,80 - 1,82 mm (.0709 - .0717)
without Receptacle: Ø 1,49 mm (.0587)

Ordering Example

Series	Tip Material	Tip Style	Tip Diameter (1/100 mm)	Plating A = Gold	Spring Force (dN)	Collar Height (mm)	Type alternative „M“
PKS	2 = Steel 3 = BeCu						

Test Probe:

PKS 171 2 04 100 A 03 02 A

Receptacles for PKS-171:

KS-171 KS-171 AM

PKS 200

Pneumatic Test Probe

Grid:


≥ 2,54 mm

≥ 100 Mil


Installation Height: 5,5 mm (.217)

Recommended Stroke: 6,0 mm (.236)


Mounting and Functional Dimensions

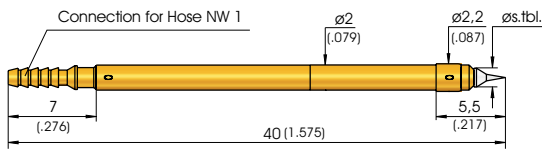



PKS-200 Type A

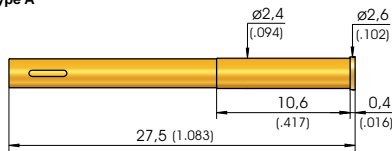

KS-200

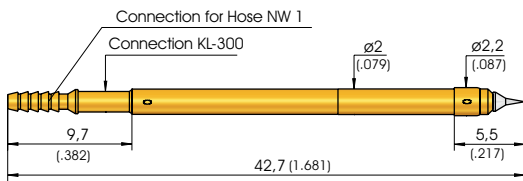

PKS-200 Type B

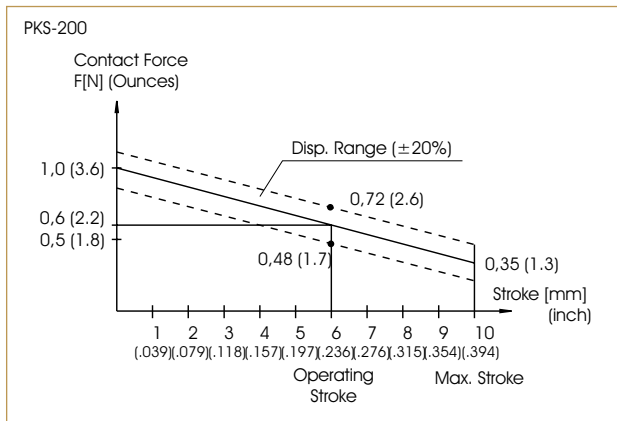

Mechanical Data

Working Stroke: 6,0 mm (.236)
Maximum Stroke: 10,0 mm (.394)
Cont. Force at Work.Stroke: 0,6 N (2.2oz)
Operating Medium: Compressed Air (filtered, oil-free)
Operating Pressure: 6 bar (86 psi)

Materials

Plunger: Steel, rhodium- or gold-plated
Barrel: Brass, gold-plated
Restoring Spring: Steel, gold-plated
Receptacle: Brass, gold-plated
O-Rings: Perbunan

Electrical Data

Current Data: 1 - 2 A
R_i typical: < 30 mΩ

Mounting Hole Size

with Receptacle: ø 2,38 - 2,39 mm (.0937 - .0941)
without Receptacle: ø 2,00 mm (.0787)

Available Tip Styles

Material	Tip Style	Plating	Further Versions	
			ø	ø (inch)
2 01 ***		R	ø 1,50 (.059)	
2 04 **		R	ø 1,30 (.051)	
2 06 **		A	ø 1,00 (.039)	
2 33 **		A	ø 1,30 (.051)	
2 91 *		A	ø 1,00 (.039)	

Collar Diameter:

* = 1,20 mm (.047)

*** = 1,50 mm (.059)

** = 1,30 mm (.051)

**** = 1,80 mm (.071)

Warning:

Do not solder the cable to the crimp points of the Receptacle.

Note:

The assembly in Grid 2,54 mm (100 Mil) is only possible up to a double row, and then only without use of Receptacles and KL-300. Then pre-wired PKS-200 ... V (with flexible Wire AWG 34, Length 500 mm (20.000")) must be used.

Note:

The Receptacles and KL-300 can be used from Grid 3,00 mm (120 Mil) up.

Note:

Pneumatic Accessories and general Instructions see Page 94/95.

Ordering Example

Series	Tip Material 2 = Steel	Tip Style	Tip Diameter (1/100 mm)	Plating A = Gold R = Rhodium	Spring Force (dN)	Collar Height (mm)	Type (alternative B or V)
--------	---------------------------	-----------	----------------------------	------------------------------------	----------------------	-----------------------	------------------------------

Test Probe:

PKS 200 2 01 150 R 06 02 A

Receptacle for PKS-200:

KS - 200


Clip Connection with Solder Terminal for Series 200:

KL - 300


Grid:
 ≥ 2,54 mm
 ≥ 100 Mil

Installation Height: 5,5 mm (.217)
Recommended Stroke: 6,0 mm (.236)


Mounting and Functional Dimensions

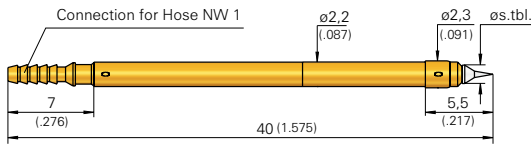



PKS-220 Type A

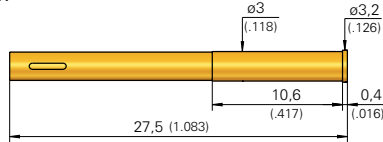

KS-220

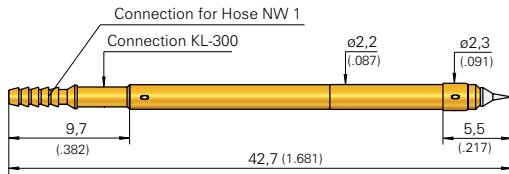

PKS-220 Type B

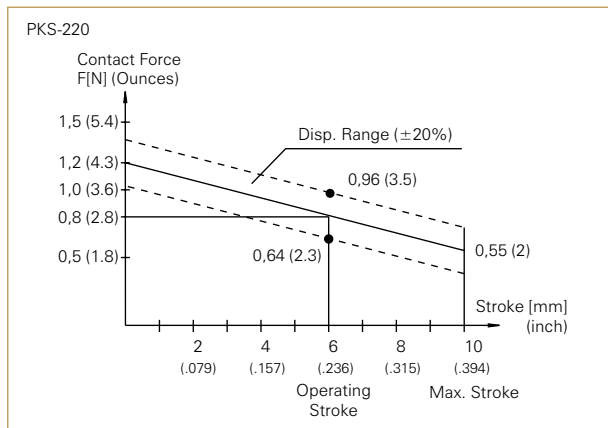

Mechanical Data

Working Stroke: 6,0 mm (.236)
Maximum Stroke: 10,0 mm (.394)
Cont. Force at Work.Stroke: 0,8 N (2.9oz)
Operating Medium: Compressed Air (filtered, oil-free)
Operating Pressure: 6 bar (86 psi)

Electrical Data

Current Data: 2 - 3 A
R_i typical: < 30 mΩ

Materials

Plunger: Steel or BeCu, rhodium- or gold-plated
Barrel: Brass, gold-plated
Restoring Spring: Steel, gold-plated
Receptacle: Brass, gold-plated
O-Rings: Perbunan

Mounting Hole Size

with Receptacle: ø 2,98 - 2,99 mm (.1173 - .1177)
without Receptacle: ø 2,20 mm (.0866)

Available Tip Styles

Material	Tip Style	Plating	Further Versions	
			ø	ø (inch)
2 01 **		R	ø 1,50 (.059)	
3 03		R	ø 2,00 (.079)	
2 04 *		R	ø 1,30 (.051)	
2 05 ***		A	ø 1,00 (.039)	
2 06		A	ø 2,50 (.098)	
3 06		R	ø 2,00 (.079)	
2 07		R	ø 2,00 (.079)	
2 91 ** **		N	ø 1,00 (.039)	

Collar Diameter:

* = 2,00 mm (.079) ** = 1,50 mm (.059)
 *** = 1,30 mm (.051) **** = 1,20 mm (.047)

Warning:

Do not solder the cable to the crimp points of the Receptacle.

Note:

The assembly in Grid 2,54 mm (100 Mil) is only possible up to a double row, and then only without use of Receptacles and KL-300. The Receptacle and KL-300 can be used from Grid 3,5 mm (140 Mil) up.

Note:

Pneumatic Accessories and general Instructions see Page 94/95.

Ordering Example

Series	Tip Material	Tip Style	Tip Diameter (1/100 mm)	Plating	Spring Force (dN)	Collar Height (mm)	Type (alternative B)
PKS	2 = Steel 3 = BeCu			A = Gold R = Rhodium			

Test Probe:

PKS 220 2 01 150 R 08 02 A

Receptacle for PKS-220:

KS - 220

Clip Connection with Solder Terminal for Series 220:

KL - 300

PKS 299

Pneumatic Test Probe

Grid:


≥ 3,50 mm

≥ 140 Mil


Installation Height: 5,5 mm (.217)

Recommended Stroke: 12,0 mm (.472)


Mounting and Functional Dimensions

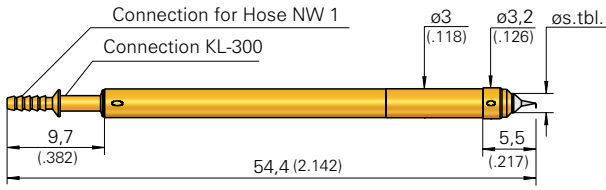


PKS-299 Type B

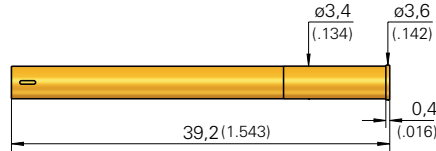

KS-299



KL-300

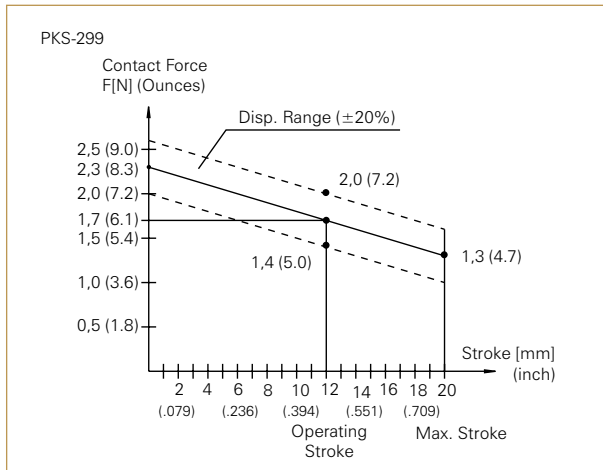

Available Tip Styles

Material	Tip Style	Plating	Further Versions	
			∅	∅ (inch)
2	01**	R		
3	02	A		
2	04**	R	2,00	(.079)
2	15**	A		

* pressed-in HM-Tip, Installation Height 6,5 mm (.256)

** Collar Diameter: 2,0 mm (.079)

Available Tip Styles

Special Versions without Collar

Material	Tip Style	Plating	Further Versions	
			∅	∅ (inch)
2	01***	R		
2	04***	R		
3	05***	A		

*** Shaft Diameter: 1,50 mm (.059)

Warning:

Do not solder the cable to the crimp points of the Receptacle.

Note:

For High-Current Applications up to 10 A, order with Special Designation „BH“ (Terminal „B“).

Note:

The Receptacle can be used from Grid 4,00 mm (160 Mil) up.

Note:

Pneumatic Accessories and general Instructions see Page 94/95.

Mechanical Data

Working Stroke: 12,0 mm (.472)
Maximum Stroke: 20,0 mm (.787)
Cont. Force at Work.Stroke: 1,7 N (6.1oz)
Operating Medium: Compressed Air (filtered, oil-free)
Operating Pressure: 6 bar (86 psi)

Materials

Plunger: Steel or BeCu, rhodium- or gold-plated
Barrel: Brass, gold-plated
Restoring Spring: Steel, gold-plated
Receptacle: Brass, gold-plated
O-Rings: Perbunan

Electrical Data

Current Rating: 2 - 3 A (see Note below)
R_i typical: < 30 mΩ

Mounting Hole Size

with Receptacle: ∅ 3,38 - 3,39 mm (.1331 - .1335)
without Receptacle: ∅ 3,00 mm (.1181)

Ordering Example

Series	Tip Material	Tip Style	Tip Diameter (1/100 mm)	Plating	Spring Force (dN)	Collar Height (mm)	Type (alternative B or BH)
2 = Steel	3 = BeCu			A = Gold R = Rhodium			

Test Probe:

P K S 2 9 9 2 0 1 2 0 0 R 1 7 0 2 B

Test Probe for usage up to 10 A:

P K S 2 9 9 2 0 4 1 3 0 R 1 7 0 2 BH

Receptacle for PKS-299:

K S - 2 9 9


Clip connection with Solder Terminal:

K L - 3 0 0



Grid:
 ≥ 3,50 mm
 ≥ 140 Mil

Installation Height: 5,5 mm (.217)
Recommended Stroke: 6,0 mm (.236)



Mounting and Functional Dimensions

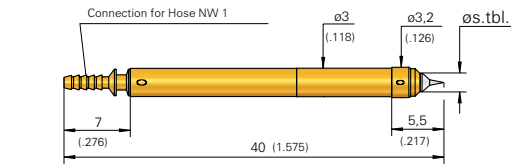

PKS-300 Type A

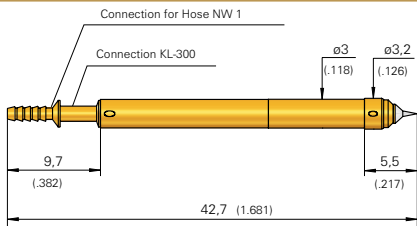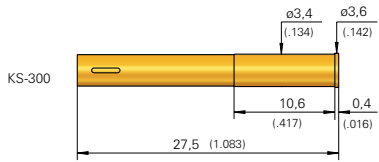

PKS-300 Type B

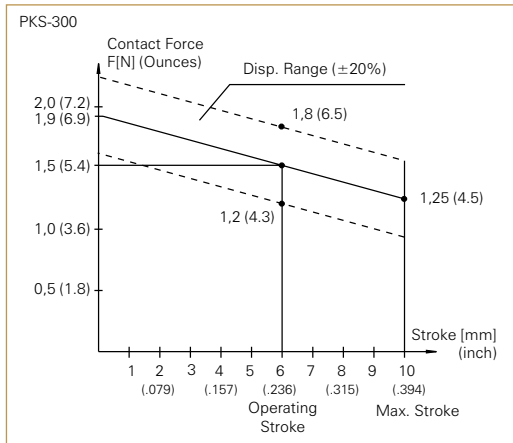

Available Tip Styles

Material	Tip Style	Plating	Further Versions	
			Ø	Ø (inch)
2 01 **		R		
2 04 **		R	2,00	(.079)
2 05 **		R	1,30	(.051)
2 06 **		A	2,50 3,50	(.098) (.138)
2 15*		A		
2 33 **		A		
2 91 **		A		

* pressed-in HM-Tip, Installation Height 6,5 mm (.256)
 ** Collar Diameter: 2,0 mm (.079)

Warning:

Do not solder the cable to the crimp points of the Receptacle.

Note:

For High-Current Applications up to 10 A, order with Special Designation „AH“ (Terminal „A“) resp. „BH“ (Terminal „B“).

Note:

The Receptacle can be used from Grid 4,00 mm (160 Mil) up.

Note:

Pneumatic Accessories and general Instructions see Page 94/95.

*** Note:

Tip 15, 01, 91 F = 1,1 N (4.0oz)
 Tip 04, 05, 06, 33 F = 1,5 N (5.4oz)

Mechanical Data

Working Stroke: 6,0 mm (.236)
Maximum Stroke: 10,0 mm (.394)
Contact Force at Work.Stroke: 1,1 N (4.0oz) or 1,5 N (5.4oz)
Operating Medium: Compressed Air (filtered, oil-free)
Operating Pressure: 6 bar (86 psi)

Materials

Plunger: Steel, rhodium- or gold-plated
Barrel: Brass, gold-plated
Restoring Spring: Steel, gold-plated
Receptacle: Brass, gold-plated
O-Rings: Perbunan

Electrical Data

Current Rating: 2 - 3 A (up to 10 A see Note below)
R_i typisch: < 30 mΩ

Mounting Hole Size

with Receptacle: Ø 3,38 - 3,39 mm (.1331 - .1335)
without Receptacle: Ø 3,00 mm (.1181)

Ordering Example

Series	Tip Material 2 = Steel	Tip Style	Tip Diameter (1/100 mm)	Plating A = Gold R = Rhodium	Spring Force (dN)	Collar Height (mm)	Type (alternative AH, B, BH)
--------	---------------------------	-----------	----------------------------	------------------------------------	----------------------	-----------------------	---------------------------------

Test Probe:

PKS 300 2 01 200 R 11 02 A

Test Probe for usage up to 10 A:

PKS 300 2 06 130 A 15 02 AH

Receptacle for PKS-300:

KS - 300

Clip Connection with Solder Terminal for Series 300:

KL - 300

PKS 399

Pneumatic Test Probe

Grid:


≥ 4,50 mm

≥ 177 Mil

Installation Height: 5,5 mm (.217)



Recommended Stroke: 12,0 mm (.472)

Mounting and Functional Dimensions

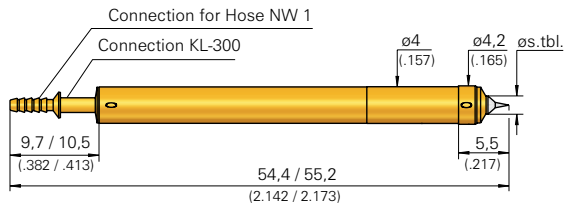

PKS-399 Type 1: with Connection for Hose NW 1

PKS-399 Type 2: with Connection for Hose NW2 (lengths see 2nd value)

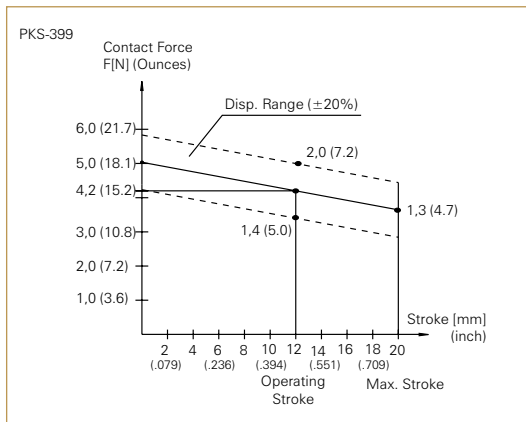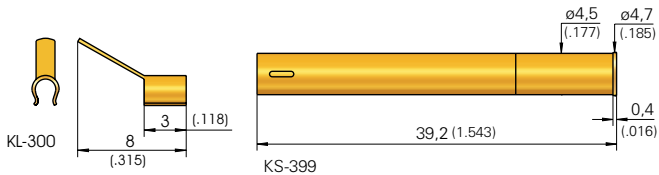

Available Tip Styles

Material	Tip Style	Plating	Further Versions	
			∅	∅ (inch)
2	01**	R	∅ 2,00 (.079)	
3	02	A	∅ 2,50 (.098)	
2	04**	R	∅ 1,30 (.051)	2,00 (.079)
2	15*	A	∅ 2,00 (.079)	

* pressed-in HM-Tip, Installation Height 6,5 mm (.256)

** Collar Diameter: 2,0 mm (.079)

Available Tip Styles

Special Versions without Collar

Material	Tip Style	Plating	Further Versions	
			∅	∅ (inch)
2	01***	R	∅ 1,50 (.059)	
2	04***	R	∅ 1,50 (.059)	
3	05***	A	∅ 1,30 (.051)	

*** Shaft Diameter: 1,50 mm (.059)

**** Note:

Tip 01, 15 F = 3,7 N (13.4oz)
Tip 02, 04, 05 F = 4,2 N (15.2oz)

Warning:

Do not solder the cable to the crimp points of the Receptacle.

Mechanical Data

Working Stroke: 12,0 mm (.472)
Maximum Stroke: 20,0 mm (.787)
Cont. Force at Work.Stroke: 3,7 N (13.4oz) or 4,2 N (15.2oz)****
Operating Medium: Compressed Air (filtered, oil-free)
Operating Pressure: 6 bar (86 psi)

Materials

Plunger: Steel or BeCu, rhodium- or gold-plated
Barrel: Brass, gold-plated
Restoring Spring: Steel, gold-plated
Receptacle: Brass, gold-plated
O-Rings: Perbunan

Note:

For High-Current Applications up to 10 A, order with Special Designation „1H“ (Terminal „1“) resp. „2H“ (Terminal „2“).

Note:

The Receptacle can be used from Grid 5,08 mm (200 Mil) up.

Electrical Data

Current Rating: 2 - 3 A (up to 10 A see Note below)
R_i typisch: < 30 mΩ

Mounting Hole Size

with Receptacle: ∅ 4,48 - 4,49 mm (.1764 - .1768)
without Receptacle: ∅ 4,00 mm (.1575)

Note:

Pneumatic Accessories and general Instructions see Page 94/95.

Ordering Example

Series	Tip Material	Tip Style	Tip Diameter (1/100 mm)	Plating	Spring Force (dN)	Collar Height (mm)	Type (alternative 2 or 2H)
PKS	2 = Steel	01	2,00	R = Rhodium	3,7	0,2	1

Test Probe:

PKS 399 2 01 200 R 37 02 1

Test Probe for usage up to 10 A:

PKS 399 2 04 130 R 42 02 1H

Receptacle for PKS-399:

KS - 399


Clip Connection with Solder Terminal for Type 1:

KL - 300

Grid:
 ≥ 4,50 mm
 ≥ 177 Mil


Installation Height: 5,5 mm (.217)
Recommended Stroke: 6,0 mm (.236)

Mounting and Functional Dimensions


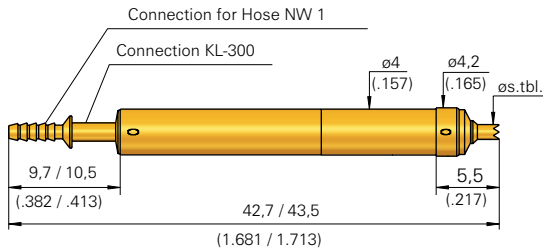


PKS-420 Type 1: with Connection for Hose NW 1

PKS-420 Type 2: with Connection for Hose NW2 (lengths see 2nd value)

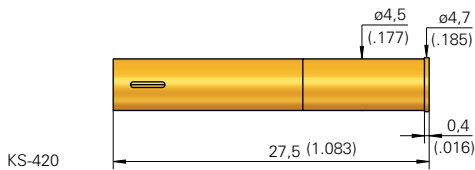

KS-420

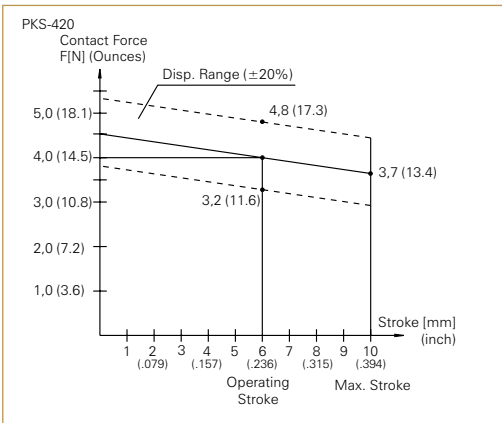

Available Tip Styles

Material	Tip Style	Tip Diameter	Plating	Further Versions	
				Ø	Ø (inch)
2	01**	Ø 2,00 (.079)	R		
2	04**	Ø 1,30 (.051)	R	2,00	(.079)
2	05	Ø 2,50 (.098)	R	1,30**	(.051)
2	06**	Ø 1,30 (.051)	A	2,50	(.098)
2	15*	Ø 2,00 (.079)	A	3,50	(.138)
2	33**	Ø 1,30 (.051)	A		
2	91**	Ø 1,30 (.051)	A		

* pressed-in HM-Tip, Installation Height 6,5 mm (.256)
 ** Collar Diameter: 2,0 mm (.079)

Warning:

Do not solder the cable to the crimp points of the Receptacle.

Note:

For High-Current Applications up to 10 A, order with Special Designation „1H“ (Terminal „1“) resp. „2H“ (Terminal „2“).

Note:

The Receptacle can be used from Grid 5,08 mm (200 Mil) up.

Note:

Pneumatic Accessories and general Instructions see Page 94/95.

*** Note:

Tip 15, 01, 91 F = 3,7 N (13.4oz)
 Tip 04, 05, 06, 33 F = 4,2 N (15.2oz)

Mechanical Data

Working Stroke: 6,0 mm (.236)
Maximum Stroke: 10,0 mm (.394)
Cont. Force at Work.Stroke: 3,7 N (13.4oz) or 4,2 N (15.2oz)**
Operating Medium: Compressed Air (filtered, oil-free)
Operating Pressure: 6 bar (86 psi)

Materials

Plunger: Steel, rhodium- or gold-plated
Barrel: Brass, gold-plated
Restoring Spring: Steel, gold-plated
Receptacle: Brass, gold-plated
O-Rings: Perbunan

Electrical Data

Current Rating: 2 - 3 A (up to 10 A see Note below)
R_i typisch: < 30 mΩ

Mounting Hole Size

with Receptacle: Ø 4,48 - 4,49 mm (.1764 - .1768)
without Receptacle: Ø 4,00 mm (.1575)

Ordering Example

Series	Tip Material 2 = Steel	Tip Style	Tip Diameter (1/100 mm)	Plating A = Gold R = Rhodium	Spring Force (dN)	Collar Height (mm)	Type (alternative 2 or 2H)
--------	---------------------------	-----------	----------------------------	------------------------------------	----------------------	-----------------------	-------------------------------

Test Probe:

PKS 420 2 06 130 A 42 02 1

Test Probe for usage up to 10 A:

PKS 420 2 04 130 R 42 02 1H

Receptacle for PKS-420:


KS - 420

Clip Connection with Solder Terminal for Type 1:

KL - 300

Pneumatic Test Probes can be actuated and controlled individually or in groups.

Possible set-up and layout:

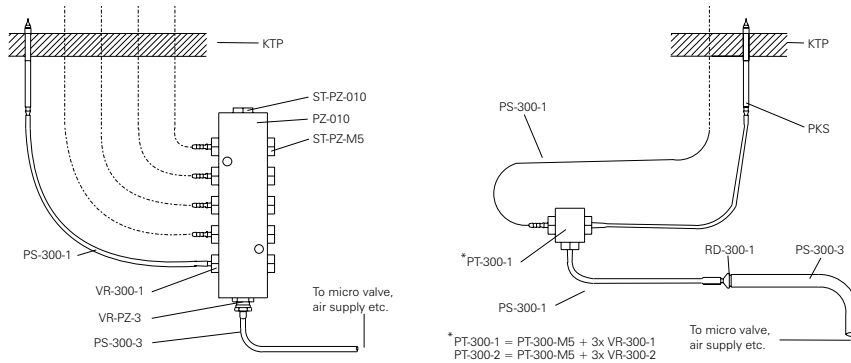

General Notes:

To connect up Pneumatic Probes, a compressed-air hose with a normal width of 1 mm (NW1) or 2 mm (NW2) is necessary. A range of adapters (see table below) are offered to establish air feed lines from commercially available compressed-air hose NW3 or from compressed-air distributors with threaded terminals M5.


The hose NW1 should only be used for short distances. The larger diameter of 3 mm guarantees good Operating Pressure.

The electrical connection is established by first soldering the wire to the Clip KL-300 and then fixing the Clip onto the end of the Pneumatic Probe. (Refer to marked positions in the drawings on the previous data sheets).

To avoid damage to the ends of the hose, only use a special cutter tool.

The various connections plates are controlled via micro-valves. Instead of a micro-valve a sealing plate (DP-1) can be used to seal the air outlet holes.


Item	tech. Designation	Order No.
Reducer piece	NW 3 / NW 1	RD-300-1
Reducer piece	NW 1 / NW 2	RD-300-1-2
Reducer piece	NW 3 / NW 2	RD-300-2
Threaded Terminal	M 5 / NW 1	VR-300-1
Threaded Terminal	M 5 / NW 2	VR-300-2
Threaded Terminal	M 5 / NW 3	VR-300-3
Threaded Terminal	M 3 / NW 1	VR-200-1
Threaded Terminal	M 3 / NW 2	VR-200-2
Threaded Terminal	M 3 / NW 3	VR-200-3
T-Piece (without Threaded Term.)	3 x M 5	PT-300-M5
T-Piece incl. 3 x VR-300-1	3 x NW 1	PT-300-1
T-Piece incl. 3 x VR-300-2	3 x NW 2	PT-300-2
Ten-fold Distributor	10 x M 5	PZ-010
Compressed-air Hose, Ø _i 1,2; Ø _o 2,0	NW 1	PS-300-1
Compressed-air Hose, Ø _i 2,0; Ø _o 3,9	NW 2	PS-300-2
Compressed-air Hose, Ø _i 2,9; Ø _o 4,3	NW 3	PS-300-3
Special Cutting Tool		SS-010
Dummy Plug for Distributor	B1/8	ST-PZ-010
Dummy Plug for Distributor	M 5	ST-PZ-M 5
Plug for Distributor	M 5-1/8a	ST-PZ-VR
Terminal for Hose NW 3	NM 5-PK 3	VR-PZ-3
Terminal for Hose NW 4	NM 5-PK 4	VR-PZ-4
3/2 Micro-Valve 12V (0,95 W)		MV 12
3/2 Micro-Valve 24V (0,95 W)		MV 24
Single-connection Plate	for 1 Valve	ASP-1
Multi-connection Plate	for 2-10 Valves	ASP-X
Sealing Plate	for conn. Plate	DP-1
Silencer	M3	28574
Silencer	M5	3981

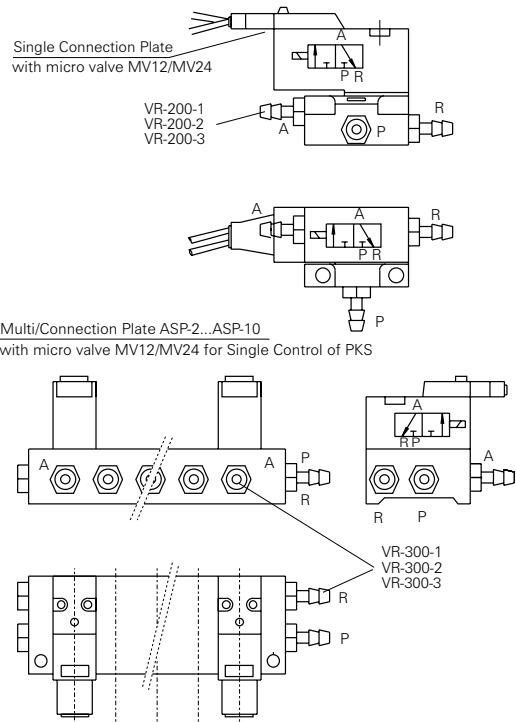




Ordering Example: To activate and control 5 pcs. Series PKS-300 simultaneously

5	PKS-300 xxx xxx x xx02 x	
x m	PS-300-1	Compressed-air Hose NW 1
1	PZ-010	Ten-fold Distributor
1	ST-PZ-010	Dummy Plug
1	VR-PZ-3	Terminal for Hose NW 3
5	VR-300-1	Terminal for Hose NW 1
x m	PS-300-3	Compressed-air Hose NW 3
1	MV 24	Micro-Valve 24V (incl. Stecker)
1	ASP-1	Single-connection Plate MV
2	VR-200-3	Terminal for Hose NW 3
5	ST-PZ-M5	Dummy Plug for Distributor


Single Connection Plate (ASP-1)

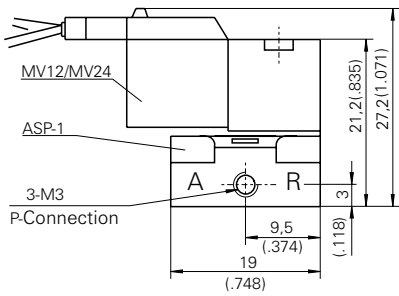

Multi Connection Plate (ASP-2...-10)

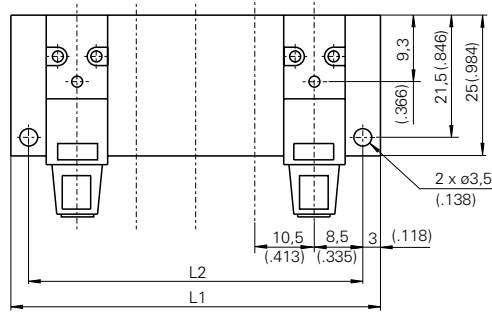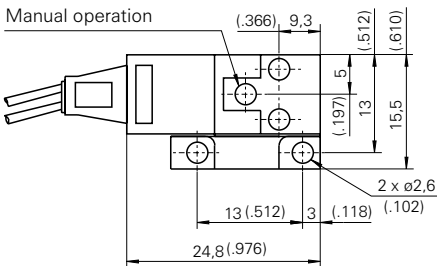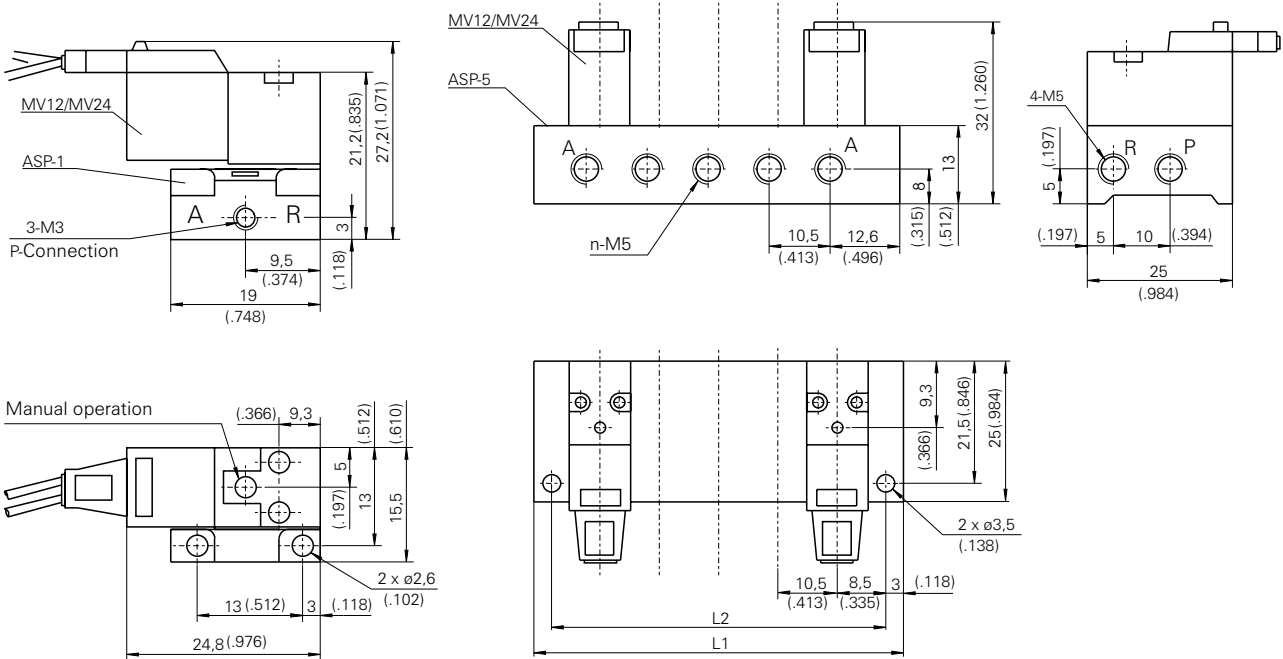

Ten-fold distributors (PZ-010)

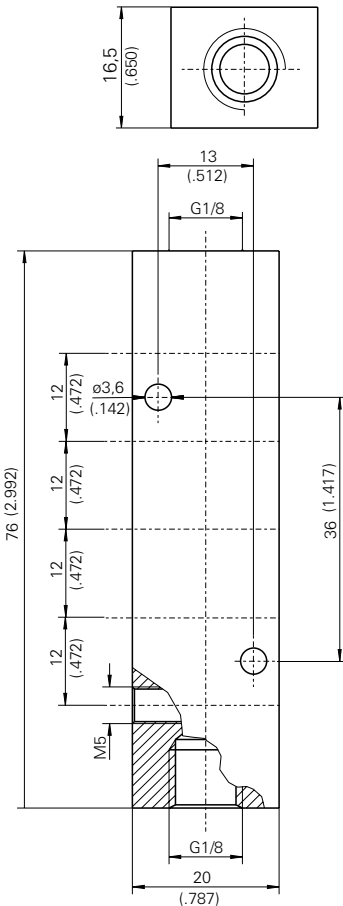

T-piece (PT-300-M5)

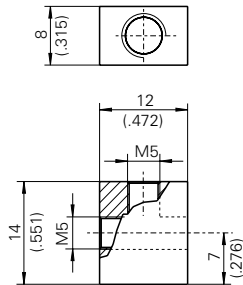



Table of Dimensions for Multi Connection Plate

Number Valves	L1	L2
2	33,5 (1.319)	27,5 (1.083)
3	44,0 (1.732)	38,0 (1.496)
4	54,5 (2.146)	48,5 (1.909)
5	65,0 (2.559)	59,0 (2.323)
7	86,0 (3.386)	80,0 (3.150)
8	96,0 (3.780)	90,5 (3.563)
9	107,0 (4.213)	101,0 (3.976)
10	117,5 (4.626)	111,5 (4.390)

Threaded Terminal M3	Threaded Terminal M5	Reducers	Plugs for Distributors PZ-010
VR-200-1 	VR-300-1 	RD-300-1 	ST-PZ-VR
VR-200-2 	VR-300-2 	RD-300-1-2 	VR-PZ-3
VR-200-3 	VR-300-3 	RD-300-2 	VR-PZ-4



The new RF-Probes Catalog

Optimal test solutions for your ambitious analog and digital RF-Applications.

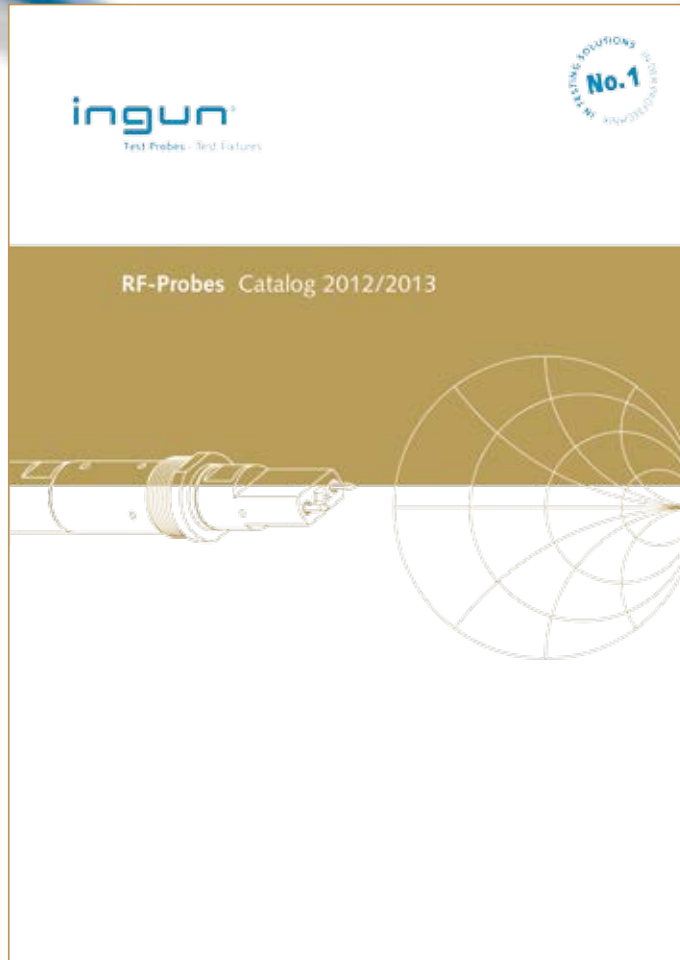

Besides general mechanical and electrical data, INGUN provides Scattering Parameter for several product types.

You can find a downloadable version of the RF-Probes catalog 2012/2013 on our website www.ingun.com

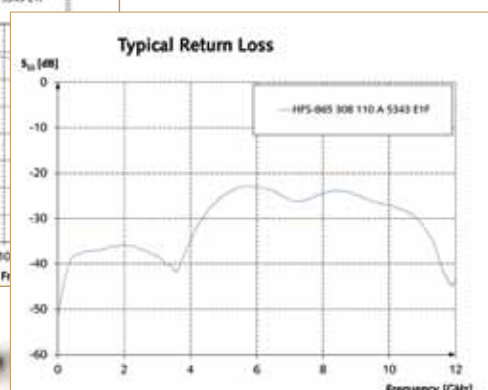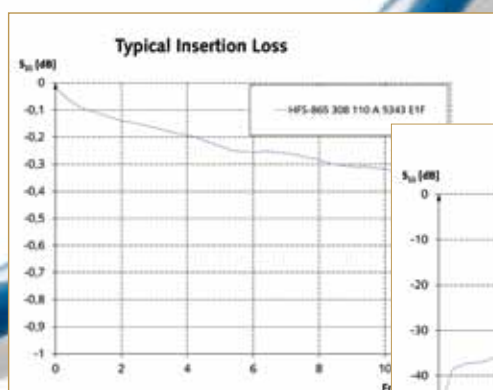

Radio-frequency Test Probes/ Dipole Test Probes

Radio-frequency Test Probes are mainly used for measuring high-frequency signals (up to 6 GHz.). These Test Probes are designed co-axially, i.e. the measurement signals flow via the inner conductor and the outer conductor is used for the shielding of the signals. For the connection to the Test System the applicable co-axial cables are available.



Application Examples:

- Sensitive measurement tasks with high measurement frequencies
- 4-pole measurements
- Contacting of common RF-Plugs and RF-Jacks
- Contacting of RF Test Points on PC-Boards
- Available in non-rotating version with a cut-out on the GND-Tip (i.e. for when the signal track on the PC-Board has been laid out accordingly)

Advantages

- Very good measurement reliability
- Compact and stable design
- Modular design for flexible exchange of individual components (Note: in the series HFS-810 the inner and outer conductors are interchangeable)
- Large variety of different tip-styles for various RF-Plugs and RF-Jacks

Radio-frequency Test Probes/ Dipole Test Probes

HFS NEW	
PC-Board Contacting (PCB)	98
HFS NEW	
Connector Contacting	99
HFS-010	100
HFS-110	101

Radio-frequency Test Probes

Contacting of PC-Boards (PCB)

Frequency: up to 6 GHz
Impedance: 50 Ω or 75 Ω

Contacting of PC-Board Layouts with different test points


For a complete overview of all available testing solutions for contacting PC-Boards please see current RF-Catalog.



PCB-coax-closed




PCB-coax-open



PCB-coax-kidney-shaped





PCB Signal-Ground Structures




PCB Contacting from the side

Customizing and connecting example

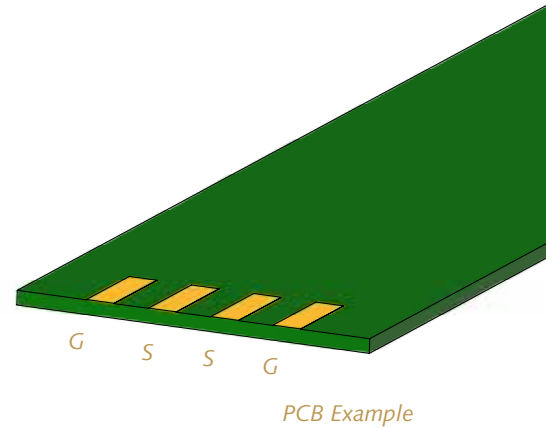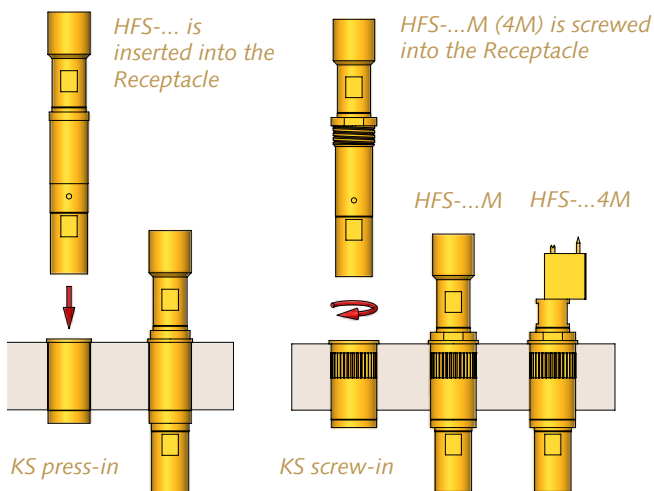


The HFS-...4M variants with asymmetric contacting tip have special securing crimps on the Probe. Subsequently, after the Probe has been screwed in completely, it can be rotated backwards into the right position within a range of 360°.

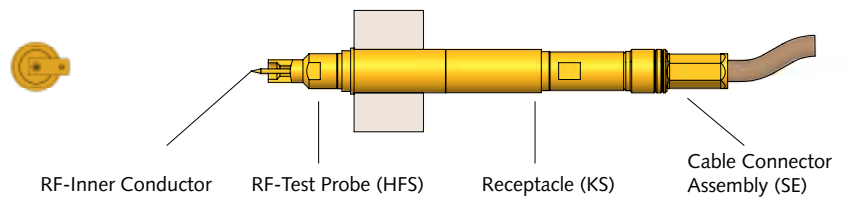

Contacting of Connectors



Customizing and connecting example

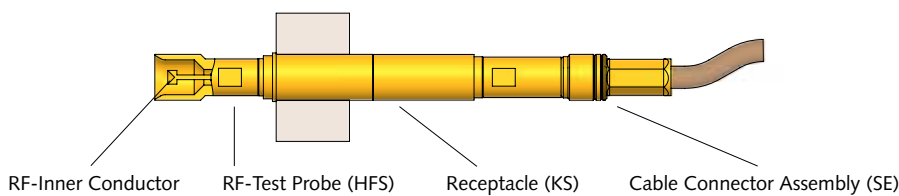

For a complete overview of all available testing solutions for contacting Connectors please see current RF-Catalog.

HFS 010

Coaxial Dipole Probe/RF-Test Probe, 50 Ω, 200 MHz

Grid:




≥ 2,54 mm

≥ 100 Mil

Installation Height: 9,5 mm (.374)

Recommended Stroke: 5,5 mm (.217)

Mounting and Functional Dimensions

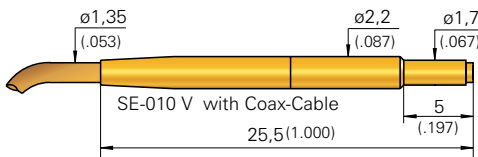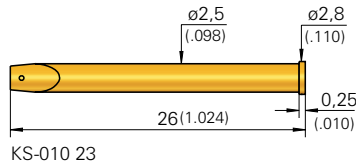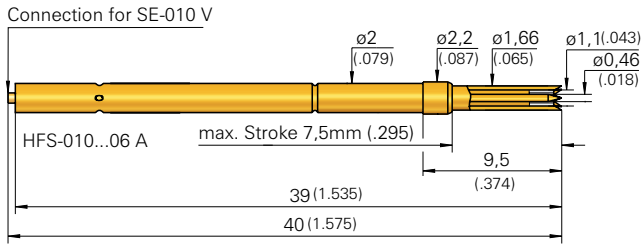

Available Tip Styles

Inner Conductor

Material	Tip Style	Plating	Further Versions	
			∅	∅ (inch)
3 51		A		
3 54		A		

Available Tip Styles

Outer Plunger

02	
06	

Mechanical Data

Working Stroke:	5,5 mm (.217)
Maximum Stroke:	7,5 mm (.295)
Spring Force at Working Stroke	
- Outer Conductor:	1,2 N (4.3oz)
- Inner Conductor:	0,8 N (2.9oz)

Materials

Plunger:	BeCu, gold-plated
Barrel:	Brass, gold-plated
Spring:	Steel, gold-plated
Receptacle:	Brass, gold-plated
Insulation:	Delrin

Note:

The Receptacle KS-010 23 can be used from Grid 3,00 mm (120 Mil) up.

Electrical Data

Frequency Range:	up to 200 MHz
Current Rating:	3 A
R _i typical:	< 20 mΩ
Impedance Test Probe:	25 - 30 Ω
	200 MHz
Impedance Cable:	50 Ω/200 MHz
	90 pf/m

Mounting Hole Size

with Receptacle:	∅ 2,48 - 2,49 mm (.0976 - .0980)
without Receptacle:	∅ 2,00 mm (.0787)

Operating Temperature

Standard:	-40 up to +80 °C
-----------	------------------

Note:

The Inner Conductor has a fixed connection with the Probe and therefore cannot be changed.

The spring-loaded Outer Plunger of the HFS-010 is also available with a shorter assembly-length on request.





Ordering Example

Series	Tip Material	Tip Style	Tip Diameter (1/100 mm)	Plating	Spring Force (dN)	Outer Plunger (alternative 06)	Type
HFS	3 = BeCu	010	3 51	A = Gold	20	02	A
Test Probe:							
Plug with RF-Coaxial Cable pre-wired, Length 0,75 m (Special Length on request):							
Receptacle:							

Grid:
 ≥ 4,50 mm
 ≥ 177 Mil

Installation Height: 9,5 mm (.374)
Recommended Stroke: 4,0 mm (.157)

Mounting and Functional Dimensions

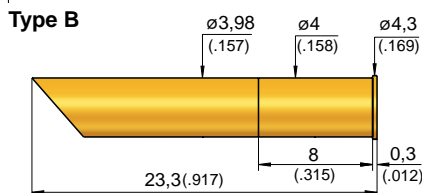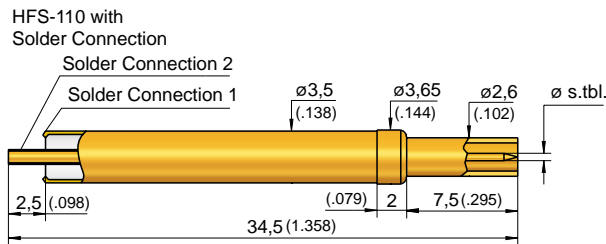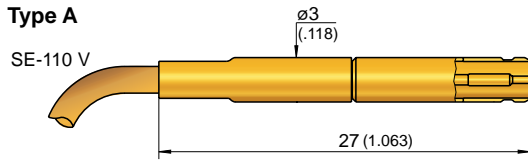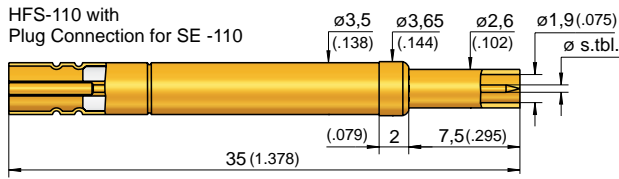

		Available Tip Styles Inner Conductor			
Material	Tip Style	Plating	Further Versions		
			∅	∅ (inch)	
3	01	A	∅ 0,50 (.020)		
3	02	A	∅ 0,50 (.020)		
3	03	A	∅ 1,15 (.045)		
3	04	A	∅ 1,15 (.045)		
3	05	A	∅ 1,15 (.045)		
3	06	A	∅ 1,15 (.045)		
3	07	A	∅ 1,00 (.039)		
3	08	A	∅ 1,15 (.045)		

		Available Tip Styles Outer Plunger	
02			
06			

Mechanical Data

Working Stroke: 4,0 mm (.157)
Maximum Stroke: 5,0 mm (.197)
Spring Force at Working Stroke
 - Outer Conductor: 3,0 N (10.8oz)
 - Inner Conductor: 1,5 N (5.4oz)

Electrical Data

Frequency Range: up to 700 MHz
Current Rating: 2 - 3 A
R_i typical: < 20 mΩ
Impedance Test Probe: 50 - 60 Ω
 700 MHz
Impedance Cable: 50 Ω/200 MHz
 96 pf/m

Materials

Plunger: BeCu, gold-plated
Barrel: Brass, gold-plated
Spring: Steel, gold-plated
Receptacle: Brass, gold-plated
Insulation: Teflon

Mounting Hole Size

with Receptacle: ∅ 3,98 - 3,99 mm (.1567 - .1571)
without Receptacle: ∅ 3,50 mm (.1378)

Operating Temperature

Standard: -40 up to +80 °C

Note:
 The Inner Conductor has a fixed connection with the Probe and therefore cannot be changed.

Ordering Example

Test Probe:

Plug with RF-Coaxial Cable pre-wired,
 Length 0,75 m (Special Length on request):

Receptacle:

Series	Tip Material 3 = BeCu	Tip Style	Tip Diameter (1/100 mm)	Plating A = Gold	Spring Force (dN) Outer Conductor	Outer Plunger (alternative 06)	Type (alternativ B)
HFS	3	04	110	A	30	02	A
SE - 110 V		Cable Type: RG 178 B/U					
KS - 110 23							

INGUN Radio-frequency Test Fixtures

The INGUN Radio-frequency Test Fixtures are developed and manufactured in accordance to customer demands. They allow testing of highly sensitive PC-Boards without electromagnetic noise influences.

The UUT is completely shielded to the outside; both for the measurement as well as to protect the operator. Because the attenuation values determine the volume of the test chamber, then these must be known to enable design and manufacturing of the RF Fixture.

The signals, which must be measured on the PC-Board, are passed from the inside through the RF-cover to the outside via INGUN RF-Probes and then on to the Test System.


More details about RF Test Fixtures can be found in our new Test Fixtures Catalog – or simply call us!



*Radio-frequency Test Fixture
based on MA 2111 with ATS
2111/HF*

High-current Test Probes

In the case of high-current Test Probes, the plunger is split in two sections. During the stroke movement, the two plunger sections are deflected away from each other in the radial direction. This leads to the enlargement of the contact zones, i.e. the signal transfer areas. This then allows higher currents to be applied.

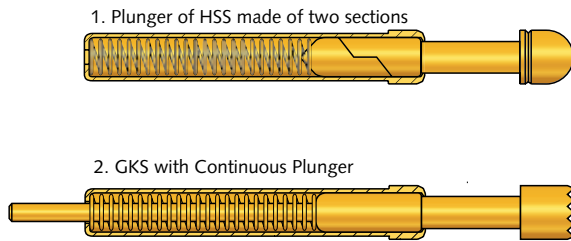

Alternatively to this standard high-current Test Probe design, such Test Probes with a continuous plunger (i.e. with a tail-end on the plunger) can also be used. Due to the direct signal flow, this design provides a very constant and stable low resistance. However, when using such a design, it must be taken into consideration that the cable (which is connected to the tail-end of the plunger) is constantly under stress due to the movement. This handicap is also apparent when using highly flexible, braided cable.

High-current Test Probes

HSS-118	104
HSS-120	105
HSS-520/520 M	106
HSS-150	107
HSS-2259	108
HSS-2513	108
HSS-2516	108
HSS-2526	108
HSS-2532	108

Screw-in HSS from page 143 on

HSS 118

High Current Probe up to 16 A

Grid:


≥ 2,54 mm

≥ 100 Mil

Installation Height: 10,3 resp. 18,3 mm (.406/ .720)

Recommended Stroke: 4,0 resp. 6,4 mm (.157/ .252)


Mounting and Functional Dimensions

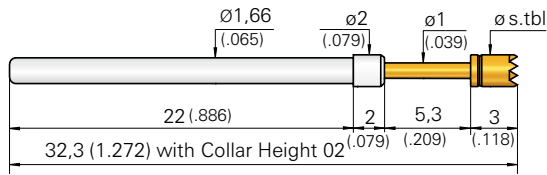

Collar Height and Installation Height

The Installation Height of the Tip (Dimension without Receptacle) is determined by the Collar Height.

Collar Height	Installation Height
02	10,3 mm (.406)
03	11,3 mm (.445)
04	12,3 mm (.484)
05	13,3 mm (.524)
06	14,3 mm (.563)
07	15,3 mm (.602)
08	16,3 mm (.642)
09	17,3 mm (.681)
10	18,3 mm (.720)



Mechanical Data

For Tip Styles with Diameter ≥ 1 mm (.039)

Working Stroke: 4,0 mm (.157)

Maximum Stroke: 5,3 mm (.209)

For Tip Styles with Diameter ≤ 1 mm (.039)

Maximum Stroke: 8,0 mm (.315)

Spring Force at Work. Stroke: 1,5 N (5.4oz)

alternative: 0,8 N (2.9oz)***; 2,25 N (8.1oz)

Electrical Data

Current Rating: max. 16 A

with Spring Force ≥ 1,5 N + Plunger of BeCu

*** Spring force < 1.5 N are not recommended for high-current applications

R_i typical: < 10 mΩ

Materials

Plunger: BeCu or Steel, gold-plated

Barrel: Brass, silver-plated

Spring: Steel, gold-plated or Stainless Steel

Receptacle: Brass, gold-plated

Mounting Hole Size

HSS-118 and KS-112 xx

with Receptacle: see KS-112, Page 50

without Receptacle: ø 1,65 mm (.0650)

Operating Temperature

Standard: -100° up to +200° C

Available Tip Styles

Material	Tip Style	Plating	Further Versions	
			ø	ø (inch)
3	02	A		
3	03	A		
3	05	A	0,65	(.026)
3	05	A		
3	05*	S		
3	06	A	1,30 1,60 1,80 2,50 3,50	(.051) (.063) (.071) (.098) (.138)
2	14	A		
3	17	A	2,00	(.079)
3	19	A		
3	53**	S		

* pressed-in Silver stud

** pressed-in Silver stud, Tip Length 3,5 mm (.138)

Installation Height plus 0,5 mm (.020)

Applications:

- High-current transfer during Functional Test
- Power-Supply-Test
- Burn-in-Test
- Contacting element in permanent use
- Usage with AC and DC

Note:

HSS-118 are used with Receptacles of the Series KS-112 (see Page 50).

Insertion and Extraction Tools for HSS and KS see Page 118.

Note:

Screw-in Version see HSS-118 ... M on Page 144.

Ordering Example

Series	Tip Material 2 = Steel 3 = BeCu	Tip Style	Tip Diameter (1/100 mm)	Plating A = Gold S = Silver	Spring Force (dN)	Collar Height (mm)
--------	---------------------------------------	-----------	----------------------------	-----------------------------------	----------------------	-----------------------

Test Probe:

H S S 1 1 8 3 1 7 1 7 5 A 1 5 0 2


Receptacles for HSS-118:

K S - 1 1 2 3 0 K S - 1 1 2 4 7

Grid:
 ≥ 4,00 mm
 ≥ 160 Mil

Installation Height: 10,3/13,3/18,3 mm (.406 - .720)
Recommended Stroke: 4,0 mm (.157)


Mounting and Functional Dimensions

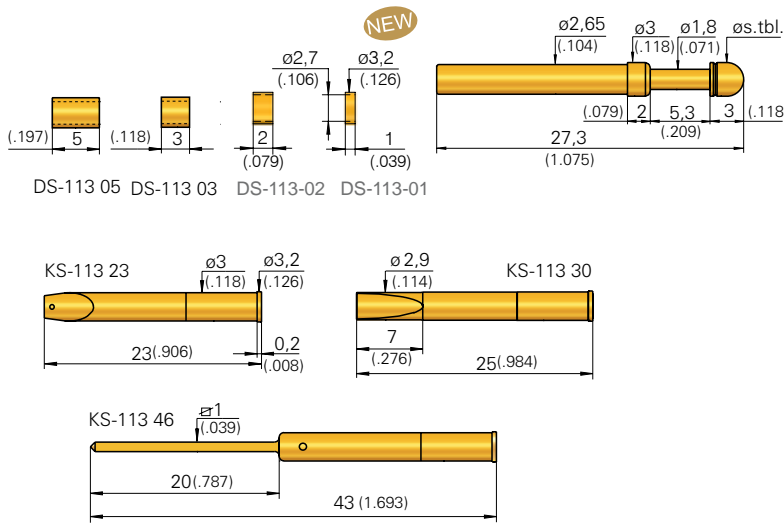

Collar Height and Installation Height

The Installation Height of the Tip (Dimension without Receptacle) is determined by the Collar Height.

Collar Height	Installation Height (without Receptacles)
02	10,3 mm (.406)
05	13,3 mm (.524)
10	18,3 mm (.720)



with KS

Mechanical Data

Working Stroke: 4,0 mm (.157)
Maximum Stroke: 5,3 mm (.209)
Spring Force at Work. Stroke: 1,5 N (5.4oz)
alternative: 1,0 N (3.6oz)***; 2,25 N (8.1oz); 3,0 N (10.8oz)

Electrical Data

Current Rating: max. 24 A
 with Spring Force $\geq 1,5$ N + Plunger of BeCu
 **** Spring force $< 1,5$ N are not recommended for high-current applications
R_i typical: < 10 m Ω

Operating Temperature

Standard: -100° up to +200° C

Materials

Plunger: BeCu or Steel, gold-plated
Barrel: Brass, gold-plated
Spring: Steel, gold-plated or Stainless Steel
Receptacle: Brass, gold-plated

Mounting Hole Size

HSS-120 and KS-113:
with Receptacle: $\varnothing 2,98 - 2,99$ mm (.1173 - .1177)
without Receptacle: $\varnothing 2,65$ mm (.1043)

Available Tip Styles

Material	Tip Style	Plating	Further Versions	
			\varnothing	\varnothing (inch)
3 02		A	4,00	(.157)
3 03		A		
3 05		A		
3 05		A	3,00	(.118)
3 05**		S		
3 06		A	3,00 4,00	(.118) (.157)
3 17		A		
3 19		A		
2 51*		A		
3 53***		S		
3 55*		A		

* Tip Length 5 mm (.197) - Installation Height with Collar Height 02: 12,5 mm (.492)
 ** pressed-in Silver stud
 *** pressed-in Silver stud, Tip Length 3,5 mm (.138) Installation Height plus 0,5 mm (.020)

Applications:

- High-current transfer during Functional Test
- Power-Supply-Test
- Burn-in-Test
- Contacting element in permanent use
- Usage with AC and DC

Tools:

Insertion and Extraction Tools for HSS see Page 118.

Note:

Screw-in Version see HSS-120 ... M on Page 145.

Ordering Example

Series	Tip Material 2 = Steel 3 = BeCu	Tip Style	Tip Diameter (1/100 mm)	Plating A = Gold S = Silver	Spring Force (dN)	Collar Height (mm)
Test Probe:	HSS	120	306	300	A	1502
Receptacles for HSS-120:	KS-113	30	KS-113	23	KS-113	46

HSS 520 / 520 M

Short-Stroke High-Current Probe up to 24 A

Grid:

≥ 4,0 mm


≥ 160 Mil

Installation Height: 7,2 mm (.283)

Recommended Stroke: 2,8 mm (.110)


Mounting and Functional Dimensions

HSS-520

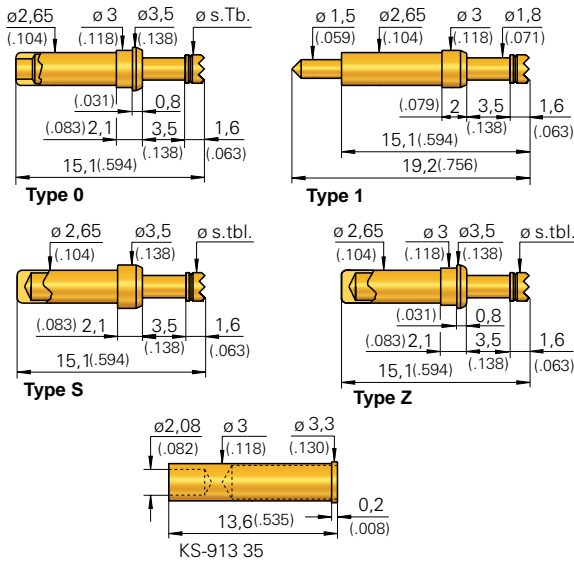

Available Tip Styles				
Material	Tip Style	Plating	Further Versions	
			∅	∅ (inch)
3 06		A	∅ 2,30 (.091)	
3 06		A	∅ 3,50 (.138)	

HSS-520 ... M

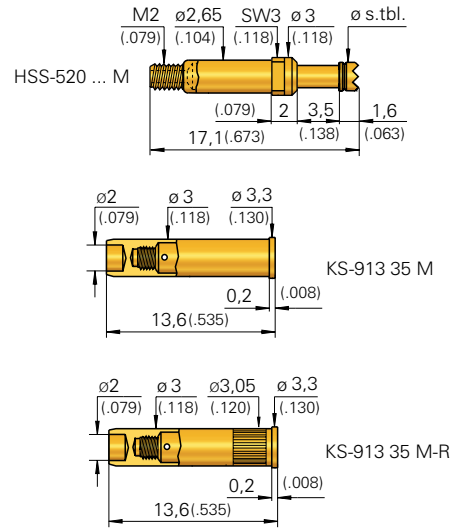

Mechanical Data

Working Stroke: 2,8 mm (.110)
Maximum Hub: 3,5 mm (.138)
Spring Force at Work. Stroke: 1,5 N (5.4oz)

Materials

Plunger: BeCu, gold-plated
Barrel: Brass, gold-plated
Spring: Stainless Steel
Receptacle: Brass, gold-plated

Electrical Data

Current Rating: 24 A
R_i typical: < 20 mΩ

Mounting Hole Size

in Material CEM 1 and FR 4:
for KS-913 35: ∅ 2,98 - 2,99 mm (.1173 - .1177)
for KS-913 35 M-R: ∅ 3,00 - 3,02 mm (.1181 - .1189)
without Receptacle: ∅ 2,65 mm (.1043)

Collar Height and Installation Height

The Installation Height of the Tip is determined by the Collar Height.

Collar Height	Installation Height
02	7,2 mm (.283)

Note:

- | Typ | Version |
|-----|---|
| 0 | End of Probe Barrel open |
| 1 | End of Probe Barrel with solder terminal |
| M | End of Probe Barrel with thread M2 for KS-913 35 M (-R) |
| S | End of Probe Barrel closed; can be soldered into PCB |
| Z | End of Probe Barrel closed; can be soldered into PCB |

Warning: Soldering the Probes demands great care. High temperatures must not reach the inside of the barrel, because this could destroy the spring.

The Receptacle KS-913 35 can only be combined with the Probe Types 0, S and Z. The Receptacle KS-913 35 M can only be combined with the Probe Type M.

Tools:

Insertion and Extraction Tools for GKS and KS see Page 118.

Note:

HSS-520 ... M will be screwed into Receptacle KS-913 35 M (-R), using special tools (see Page 170/171).

Recommended Screw-in Torque:
 Min.: 5 Ncm / Max.: 10 Ncm

Ordering Example

Series	Tip Material	Tip Style	Tip Diameter (1/100 mm)	Plating	Spring Force (dN)	Collar Height (mm)	Type
	3 = BeCu			A = Gold R = Rhodium			1, 0, S, M, Z

Test Probe:

H S S 5 2 0 3 0 6 2 3 0 A 1 5 0 2 M

Receptacles:


K S - 9 1 3 3 5 K S - 9 1 3 3 5 M K S - 9 1 3 3 5 M - R

Grid:
 ≥ 5,08 mm
 ≥ 200 Mil


Installation Height: 10,8 / 13,8 mm (.425/ .543)
Recommended Stroke: 4,4 / 7,4 mm (.173/ .291)

Mounting and Functional Dimensions

HSS-150

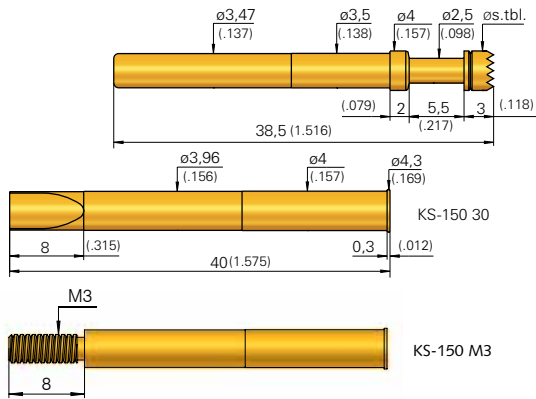

HSS-150 ... H

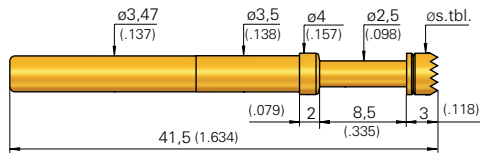

Collar Height and Installation Height

The Installation Height of the Tip is determined by the Collar Height.

Collar Height	Installation Height (with Receptacles)
02	10,8 mm (.425)
02 H	13,8 mm (.543)

Mechanical Data

Working Stroke: 4,4 mm (.173)
 Typ "H": 7,4 mm (.291)
Maximum Stroke: 5,5 mm (.217)
 Typ "H": 8,5 mm (.335)
Spring Force at Work. Stroke: 3,0 N (10.8oz)
alternative: 5,0 N (18.1oz)

Electrical Data

Current Rating (at room temperature:) 50 A
 (for short loads up to 80 A)
R_i typisch: ≤ 10 mΩ

Operating Temperature

Standard: -100° up to +200° C

Materials

Plunger: BeCu, gold-plated or Silver stud
Barrel: Brass, gold-plated
Spring: Stainless Steel
Receptacle: Brass, gold-plated

Mounting Hole Size

HSS-150 and KS-150:
with Receptacle: ∅ 3,98 - 3,99 mm (.1567 - .1571)
without Receptacle: ∅ 3,50 mm (.1378)

Note:

Screw-in Version see HSS-150 ... M on Page 146.

Available Tip Styles

Material	Tip Style	Plating	Further Versions	
			∅	∅ (inch)
3	02	A		
3	03	A		
3	05*	S		
3	06	A	3,00	(.118)
3	17	A		
3	19	A		

* pressed-in Silver stud

Available Tip Styles

Special Version HSS-150 ... H

Material	Tip Style	Plating	Further Versions	
			∅	∅ (inch)
3	02	A		
3	05*	S		
3	06	A	4,00	(.157)
3	17	A		

Total Length 41,5 mm (1.634), Special Designation "H"

* pressed-in Silver stud

Applications:

- High-current transfer during Functional Test
- Power-Supply-Test
- Burn-in-Test
- Contacting element in permanent use
- Usage with AC and DC

* Tip Style 05 S

The pressed-in silver stud prevents burning or welding of the test probe to the test point.

Ordering Example


Series	Tip Material 3 = BeCu	Tip Style	Tip Diameter (1/100 mm)	Plating A = Gold S = Silver	Spring Force (dN)	Collar Height (mm)	Special Designation (alternative "H")
Test Probe:	HSS	150	305	400	S	30	02
Test Probe:	HSS	150	306	400	A	30	02H
Receptacles for HSS-150:	KS-150	30	KS-150	M3			

HSS 2259-2532

High-Current Probe from 25 A up to 400 A

Installation Heights: see below
Recommended Stroke: 7,0 mm (.276)

High Current Test Probe

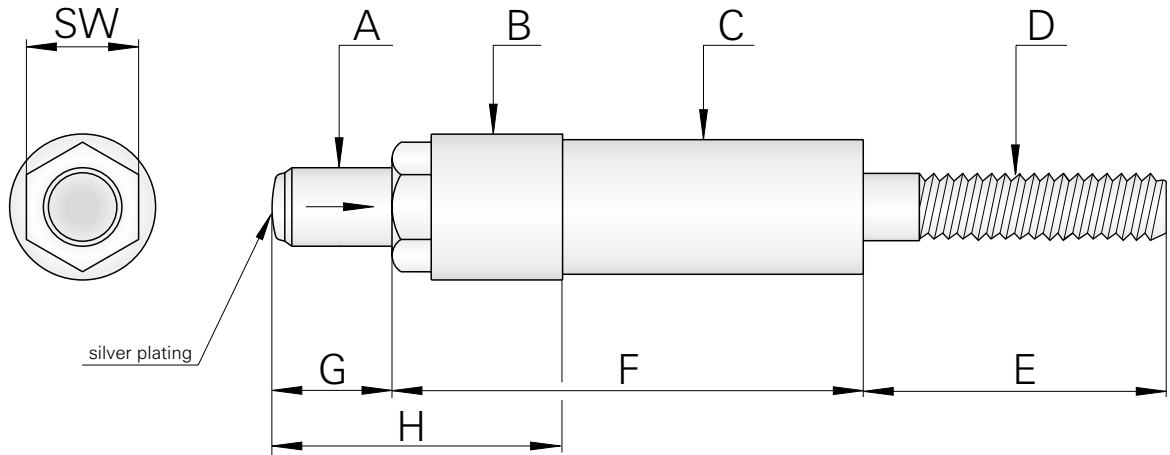

Order-No.	Maxim. Current (A)	Transition Resistance (mΩ)	Spring Force Pre-Load N (oz)	Spring Force Work. Stroke N (oz)	Ø A mm (inch)	Ø B mm (inch)	Ø C mm (inch)	D (Thread)	E mm (inch)	F mm (inch)	G mm (inch)	H mm (inch)	SW Spanner Size	Silver Plating mm (inch)
2259	25	1,0	5 (18.1)	10 (36.0)	4,9 (.193)	9 (.354)	9 (.354)	M5	20 (.787)	28 (1.102)	9,5 (.374)	37,5 (1.476)	SW 7 (.276)	Ø 4 (.157)
2513	35	0,7	6 (21.7)	12 (43.2)	7 (.276)	13 (.512)	12 (.472)	M6	27 (1.063)	42 (1.654)	10,5 (.413)	25,7 (1.012)	SW 10 (.394)	Ø 6 (.236)
2516	100	0,5	7 (25.2)	17 (61.2)	9 (.354)	16 (.630)	15 (.591)	M6	27 (1.063)	42,2 (1.661)	12 (.472)	27 (1.063)	SW 12 (.472)	Ø 6 (.236)
2526	200	0,3	38 (136.8)	58 (208.8)	16 (.630)	26 (1.024)	25 (.984)	M8	27 (1.063)	52 (2.047)	11 (.433)	40 (1.575)	SW 20 (.787)	3 x Ø 6 3 x (.236)
2532	400	0,1	70 (252.0)	116 (417.6)	25,9 (1.020)	32 (1.260)	32 (1.260)	M14	51 (2.01)	52 (2.047)	11 (.433)	63 (2.480)	-	3 x Ø 8 3 x (.315)

Mechanical Data

Working Stroke: 7,0 mm (.276)
Maximum Stroke: see Table above - column "G"

Electrical Data

see Table above


Operating Temperature

+1° up to +85° C

Materials

Plunger: Brass, silver-plated
Silver-plating on the Contact Surface
Barrel: Brass, silver-plated
Spring: Stainless Steel

Contacting Terminal for High Current Test Probes (with silver plating)

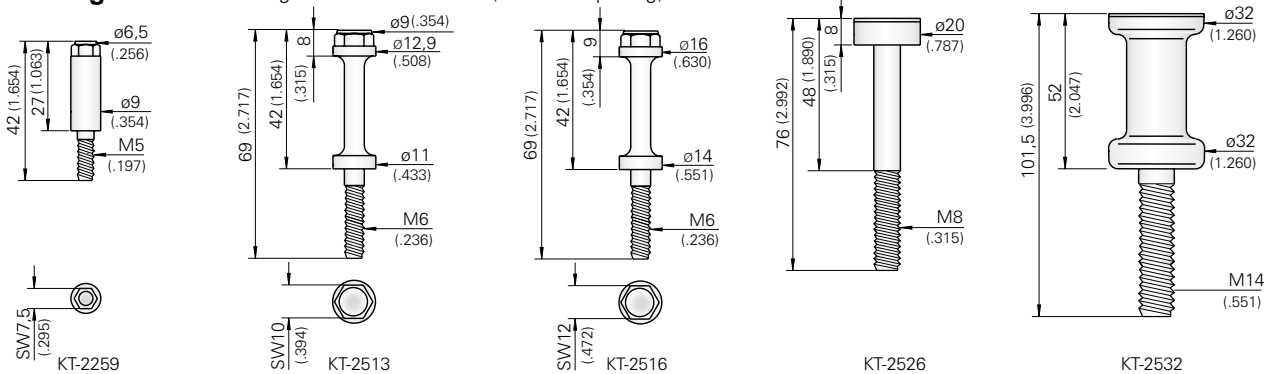

Ordering Example

Test Probe:

H S S 2 2 5 9


Contact Terminal:

K T 2 2 5 9

Materials

Contact Terminals: Brass, silver-plated
Silver-plating on the Contact Surface

Fixture Customizing

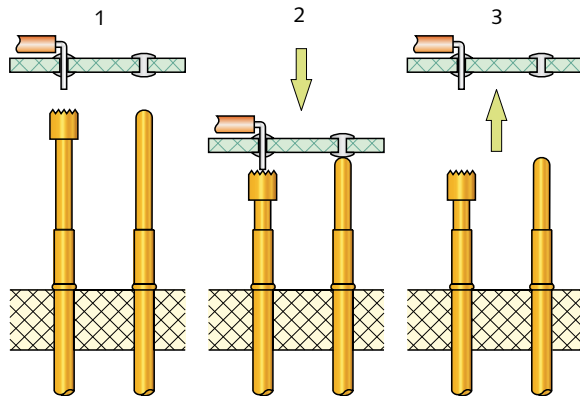

Stroke-measuring Probe (HMS)

To check the stroke of a Test Fixture this type of Test Probe can be used. These Test Probes are assembled in such a way that the plunger can be pushed down but will not come out again on its own. Subsequently the stroke of the Test Fixture after activation can be measured.

Instructions for use:

1. Insert HMS instead of a standard Test Probe
2. Activate the Test Fixture. Subsequently, the plunger of the HMS is pressed down. Crimps on the barrel secure the plunger in the activated position.
3. After de-activation of the Test Fixture the working stroke of the HMS can be measured.

After measuring, the plunger can be pulled out again using only little force. Such a Stroke-measuring Probe can be used many times.


Interfaces / Customizing

GKS-945	110
GKS-946	110
GKS-938	110
GKS-100	110
GKS-100 357 ...	110
GKS-100 307 150 ...	110
GKS-100 306 229 ...	110
Contact Terminal KT	111
GKS-925 TJA	112
HMS ff.	112
HMS-075	112
HMS-100	112
HMS-422	112
GKS-416	113
GKS-102	113
GKS-504	113
GKS-414	113
Test Fixtures accessories NEW	114–116


Interface Probes

for GenRad/Pylon Augat, R & S, Teradyne, Factron and Agilent/HP 3070 Test Systems

Mounting and Functional Dimensions

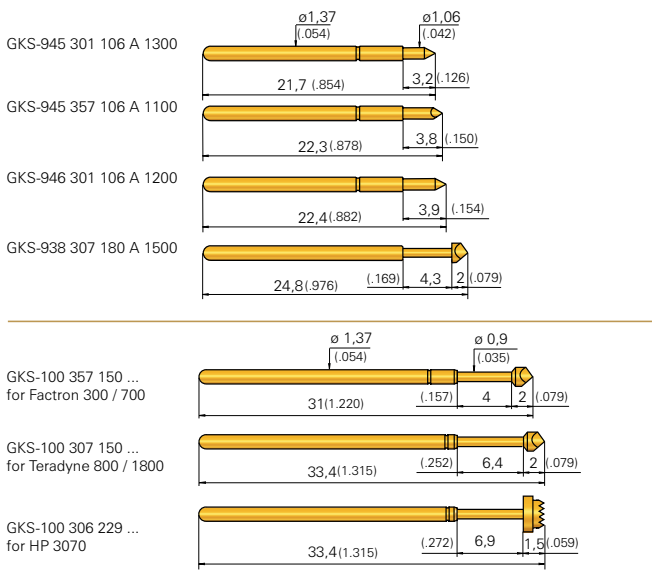

Receptacles

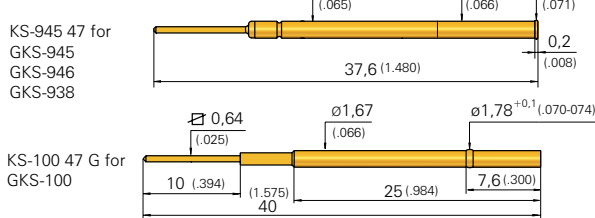

Mechanical Data

Type	Work. Stroke mm (inches)	Max. Stroke mm (inches)	Spring Force at Work. Stroke N (oz)	Installation Height mm (inches)
945 301	2,1 (.083)	3,2 (.126)	1,3 N (4.7oz)	3,7 (.146) *
945 357	2,6 (.102)	3,2 (.126)	1,1 N (4.0oz)	4,3 (.169) *
946 301	3,2 (.126)	3,9 (.154)	1,2 N (4.3oz)	4,4 (.173) *
938 307	3,6 (.142)	4,3 (.169)	1,5 N (5.4oz)	6,8 (.268) *
100 357	3,0 (.118)	4,0 (.157)	1,2 (Ord.-No.=10)	13,6 (.535) / variable **
100 ...	4,3 (.169)	6,35 (.250)	1,0/2,0/2,25/3,0	16,0 (.630) / variable **

*with KS-945 47 ** with KS-100 47 G

Mounting Hole Size ***

for KS-945 47:
- in CEM 1 using collar $\phi 1,68 - 1,69$ mm (.0661 - .0665)

for KS-100 47 G:
- Press-ring inserted $\phi 1,70 - 1,75$ mm (.0669 - .0689)

Electrical Data

Current Rating: 4 - 5 A
R_i typical: 20 m Ω

Materials

Plunger: BeCu , gold-plated
Barrel: Nickel-Silver or Bronze, gold-plated
Spring: Steel, gold-plated

Collar Height and Installation Height

The Installation Height is variable, depending on position of the Press-ring is set.

Ordering Example

Series	Tip Material	Tip Style	Tip Diameter (1/100 mm)	Plating	Spring Force (dN)	Collar Height (mm)	Special Designation (see Note)
Test Probe:	3 = BeCu			A = Gold			
Receptacle for GKS 945 / 946 / 938:							
Receptacle for GKS-100:							

Ordering Example: G K S 9 4 5 3 0 1 1 0 6 A 1 3 0 0

GKS-945 / 946 for GenRad/Pylon Augat/R&S-Interfaces				
Material	Tip Style	Plating	Further Versions	
			ϕ	ϕ (inch)
3 01		A	$\phi 1,06$ (.042)	
3 57		A	$\phi 1,06$ (.042)	

GKS-938				
Material	Tip Style	Plating	Further Versions	
			ϕ	ϕ (inch)
3 07		A	$\phi 1,80$ (.071)	

GKS-100 for Factron 300/700 Interface				
Material	Tip Style	Plating	Further Versions	
			ϕ	ϕ (inch)
3 57		A	$\phi 1,50$ (.059)	

GKS-100 for Teradyne 800/1800 Interface				
Material	Tip Style	Plating	Further Versions	
			ϕ	ϕ (inch)
3 07		A	$\phi 1,50$ (.059)	

GKS-100 for Agilent/HP 3070 Interface				
Material	Tip Style	Plating	Further Versions	
			ϕ	ϕ (inch)
3 06		A	$\phi 2,29$ (.090)	

*** Services:

Customized Contact Blocks drilled according to customer demands (and matching certain INGUN Receptacles) are available from INGUN.

Note:

To order Test Probes with bent barrel end, use Special Designation „B“ (Banana).
Contacting Terminals for various Interfaces on request.

Grid:
 ≥ 2,54 mm
 ≥ 100 Mil


Contact Terminals

for Interfaces and Transfer Fields


e-type® Probes
 ICT / FCT
 Bead Probes
 Fine Pitch
 Metric Stand.
 Solderable
 Short-stroke
 Flying Probes
 DKS
 SKS
 PKS / PSK
 RF / Dipole Test Probes
 HSS
 Fixture customizing
 Tools
 Cable Test Probes

Contact Terminals with Collar Height: 3 mm (.118)


KT-254 W-E03 (wire-wrap)




KT-254 W3 E03 (wire-wrap)




KT-254 L-E03 (Solder)




KT-254 L3 E03 (Solder)



KT-120 L3 E02 - 30 (Solder) High-current Contact Terminal




KT-150 L3 E03 - M3 High-current Contact Terminal




Contact Terminals with Collar Height: 2 mm (.079)


KT-254 W-E02 (wire-wrap)




KT-254 W3 E02 (wire-wrap)




KT-254 L-E02 (Solder)




KT-254 L3 E02 (Solder)



KT-254 L3 E02 - 30 (Solder Connection)




KT-254 W-PL (wire-wrap)




Other Contact Terminals:


KT-254 W3 E12 (wire-wrap) For assembly in INGUN-ZSK Transfer Field (ZSK = Top-side Contacting Unit)

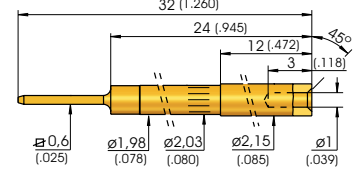


KT-158 02 (Order No. 9408) Contacting Terminal for GenRad Interface




KT-158 (Order No. 3650) Contacting Terminal for Zehntel Interface

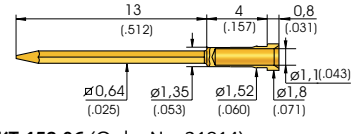


KT-158 06 (Order No. 21814)




KT-586 102 400 R Contacting Terminals for general usage



KT-279 102 300 (to solder in)



KT-112 143 215 E02 (Replaceable). Will be used with KS-112, see Page 50)



Mounting Hole Size *

for KT-254:

in CEM1 ø 1,98 - 2,00 mm (.0780-.0787)

in FR4 ø 1,98 - 1,99 mm (.0780-.0783)

for KT-158:

in CEM1 and FR4 ø 1,40 mm (.0551)

for KT-586:

in CEM1 and FR4 ø 2,55 - 2,57 mm (.1004-.1012)

for KT-120:

in CEM1 and FR4 ø 3,00 - 3,02 mm (.1181 - .1189)

for KT-150:

in CEM1 and FR4 ø 4,00 - 4,02 mm (.1575 - .1583)

* Services:

Customized Contact Blocks drilled according to customer demands (and matching certain INGUN Receptacles) are available from INGUN.

Electrical Data

R_i typical: < 5 mΩ

Materials



Contact Terminals: Brass, gold-plated
 KT-586: Brass, rhodium-plated

Collar Height and Install. Height for KT-254

The Installation Height of the Contact Terminals is determined by the collar Height.

Test Probes for Fixture Customizing

Mounting and Functional Dimensions

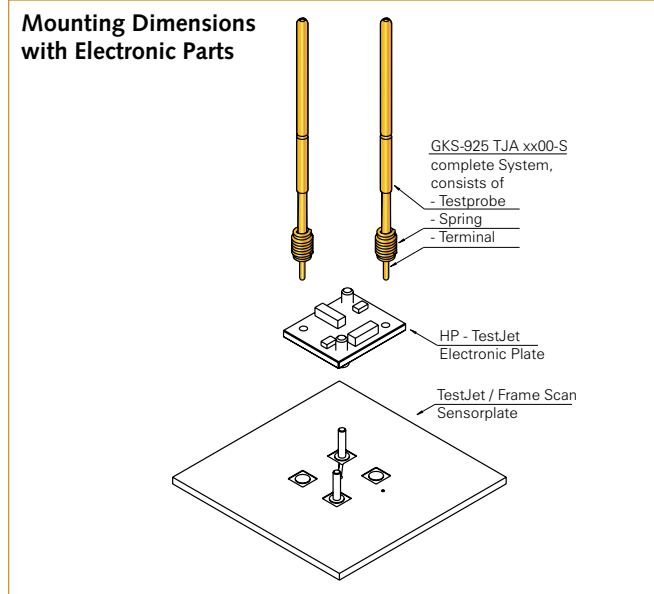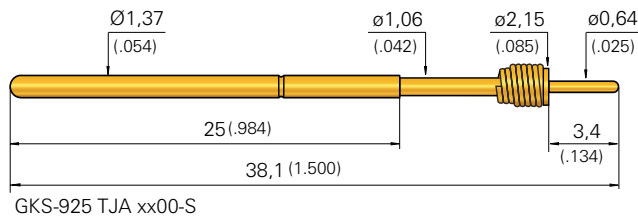

GKS/925 TJA

Test Probes for the assembly of HP TestJet or Teradyne FrameScan applications. The spring-loaded tip balances out possible slanting of the Sensor Plate on the device (IC, connector etc.)
 Receptacles see GKS-100 (Page 29).

Mechanical Data

Working Stroke: 5.0 mm (.197)
Spring Force at Work. Stroke: 1,0 N (3.6oz)
alternative: 1,5 N (5.4oz); 2,0 N (7.2oz); 3,0 N (10.8oz)

Materials

Plunger: BeCu, gold-plated
Barrel: Bronze, gold-plated
Spring in GKS: Steel, gold-plated
Outer Spring: BeCu, gold-plated
Contact Terminal: Brass, gold-plated




Electrical Data

Current Rating: 3 - 5 A
R_i typical: < 20 mΩ

Ordering Example

Test Probe: **G K S 9 2 5 T J A 1 0 0 0 - S**

Stroke Measurement Probe

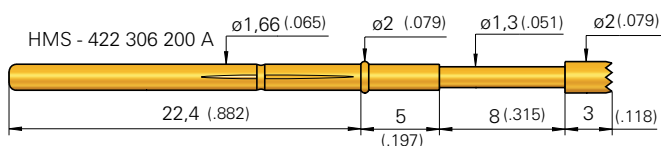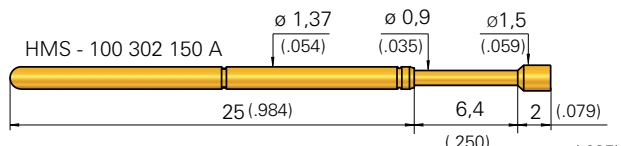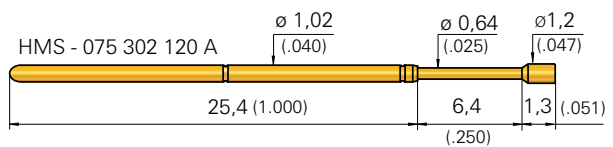

Description Measurement Probe

Test Probe for checking the stroke of a Test Fixture. Procedure:

1. Install HMS instead of standard Probe
2. Activate Test Fixture. With this, the Plunger of the HMS is pressed down. Crimps on the barrel of the Probe hold the plunger down in the activated position.
3. After de-activating the Test Fixture, the stroke can now be measured on the pressed down plunger.

Note: the plunger can be easily pulled out again and the Probe re-used many times.

Application Area

Tip Style „05“:

- For contacting Test Pads

Tip Styles „02 / 06“:


- For contacting Component Pins

Further Versions or Series on request.

Ordering Example

HMS-075:	H	M	S	0	7	5	3	0	5	0	6	4	A
HMS-100:	H	M	S	1	0	0	3	0	2	1	5	0	A
HMS-422:	H	M	S	4	2	2	3	0	6	2	0	0	A

PCB Support Probe GKS-416

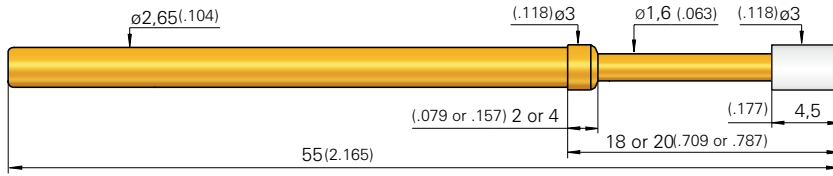

Ordering Example

GKS for Install. Height 18,0 mm (.709):

G	K	S	4	1	6	0	0	2	3	0	0	A	5	0	0	2
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

GKS for Install. Height 20,0 mm (.787):

G	K	S	4	1	6	0	0	2	3	0	0	A	5	0	0	4
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

Mechanical Data

Working Stroke: 9,2 mm (.362)
Maximum Stroke: 11,5 mm (.453)
Spring Force at Work.Stroke: 5,0 N (18.1oz)


Materials

Plunger: BeCu , gold-plated
Barrel: Brass, gold-plated
Spring: Steel, gold-plated
Tip: Delrin
Receptacle: KS-113 23

Mounting Hole Size

see GKS-113 (Page 58)

PCB Support Probe GKS-102

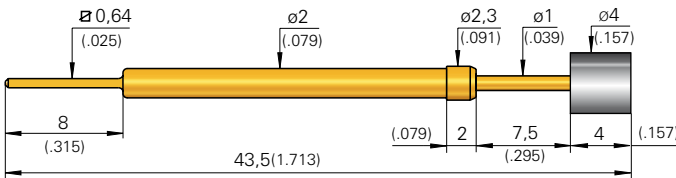

Ordering Example

GKS for Install. Height 13,5 mm (.531):

G	K	S	1	0	2	2	5	0	4	0	0	P	3	0	0	2	W
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

Mechanical Data


Working Stroke: 4,8 mm (.189)
Maximum Stroke: 6,5 mm (.256)
Spring Force at Work. Stroke: 1,5 N (5.4oz)
alternative: 3,0 N (10.8oz); 5,0 N (18.1oz)

Materials

Plunger: Steel , gold-plated
Barrel: Brass, gold-plated
Spring: Steel, gold-plated
Tip: PVC
Receptacle: KS-102 23
Mounting Hole Size: see GKS-102, Page 56

Test Probe GKS-504

with continuous Plunger - for the activation of a Micro Switch

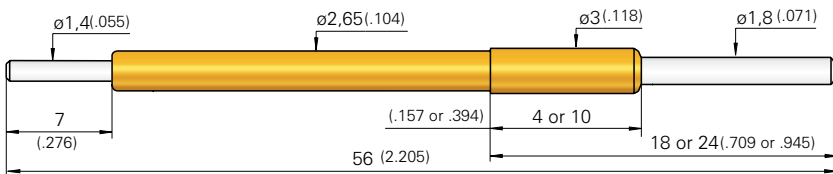

Ordering Example

GKS for Install. Height 18,0 mm (.709):

G	K	S	5	0	4	3	0	5	1	8	0	N	0	5	0	4
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

GKS for Install. Height 24,0 mm (.945):

G	K	S	5	0	4	3	0	5	1	8	0	N	5	0	1	0
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

Mechanical Data

Working Stroke: 11,2 mm (.441)
Maximum Stroke: 14 mm (.551)
Spring Force at Work. Stroke: 0,5 N (1.8oz)
alternative: 3,0 N (10.8oz); 5,0 N (18.1oz)


Materials

Plunger: BeCu , nickel-plated
Barrel: Steel, gold-plated or Stainless Steel
Spring: Brass, gold-plated
Receptacle: KS-113 23

Mounting Hole Size

see GKS-113 (Page 58)

GND Probe GKS-414

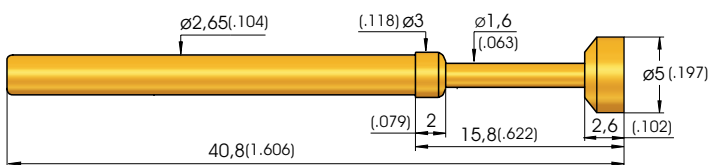

Ordering Example

GKS for Install. Height 15,8 mm (.622):

G	K	S	4	1	4	2	0	2	5	0	0	A	1	5	0	2
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

Mechanical Data

Working Stroke: 9,6 mm (.378)
Maximum Stroke: 11,2 mm (.441)
Spring Force at Work. Stroke: 1,5 N (5.4oz)
alternative: 3,0 N (10.8oz)
Recaptacle: KS-113 23 (see Page 56)

Mounting Hole Size

see GKS-113 (Page 58)

Customizing Accessories (Excerpt)

Marking Units

The INGUN Marking Units excel themselves with their sturdiness, compact size, simple assembly and their long-life. We offer various types to support all Fixture designs and concepts. Please note that the Engraver must be mounted vertical to the surface which is to be marked.

Screwing Units for Potentiometer Adjustment

The compact, manual or automatic-driven, Screwing Units enables potentiometer adjustment. The automatic Screwing Unit is driven by means of a flexible shaft, which allows an individual and compact mounting of the drive engine. The threaded section and the mounting holes in the housing enables multiple assembly possibilities in the Test Fixture. The automatic Screwing Unit is designed modularly – offering problem-free adaption of the Unit in regard to the various insertable tips and the special customer demands. The insertable tip itself is spring-loaded bedded.

Electric-driven Marking Units

Part No. 24447 Marking Unit-short with scratching Engraver, Ø 12 x 60 mm (SW 14), 12 V, Ø Circle 2 mm, Marking of hard surfaces (e.g. FR4, CEM1, etc.)



Marking

Part No. 25251 Marking Unit-short with cutting Engraver Ø 12 x 60 mm (SW 14), 12 V, Ø Circle 2 mm, Marking of soft surfaces (e.g. labels, hardwood, etc.)



Marking

Part No. 24456 Marking Unit-long with scratching Engraver, Ø 12 x 100 mm (SW 14), 12 V Ø Circle 2 mm, Marking of hard surfaces (e.g. FR4, CEM1, etc.)



Marking

Automatic Screwing Unit

Part No. 27791 Body of Potentiometer Screwing Unit

Part No. 27790 Replacable Unit without insertable tip

Individual insertable tip on request. Max. stroke approx. 4.0 mm, applied force by max. stroke approx. 1 N

Manual Screwing Unit

Part No. 17049 Manual Screwing Unit, cross-head and flat-head tip including

Manual Key/Button activation

Part No. 19637 Manual Key/Button activation



Marking Unit-short (Part No. 24447)



Marking Unit-short (Part No. 25251)



Marking Unit-long (Part No. 24456)



Automatic Screwing Unit



Manual Screwing Unit



Manual Key/ Button activation

Pneumatic-driven Marking Units

Part No. 25241 Marking Unit with cutting Engraver Ø 16 x 57 mm (SW 19), 0.6 MPa, Ø Circle 2 mm, Marking of hard surfaces (e.g. FR4, CEM1, etc.)



Marking

Part No. 29483 Marking Unit with milling Engraver Ø 16 x 57 mm (SW 19), 0.6 MPa, Ø Circle area with approx. Ø 1.0 to Ø 2.0 mm, Marking of hard and soft surfaces



Marking



Marking Unit (Part No. 25241)



Marking Unit (Part No. 29483)

Pylon Receiver

The Pylon Receiver from INGUN can be loaded with all INGUN Interface Blocks.



Part No. 32162
INGUN Pylon-Receiver (10 Interface Blocks) with extended contacting stroke (Further information see on page 47)

High-frequency Block 16-pole (2 GHz)



S-RC-016-2GHz-16
 Part No. 34581
 Loaded with: HFS-810 305 051 A 5306

S-ATS-016-2GHz-16
 Art.-Nr. 39524
 Loaded with: SB-810 Z
 Self-centering: ± 0.2 mm

High-frequency Block 16-pole (4 GHz)



S-RC-016-4GHz-16
 Part No. 34996
 Loaded with: HFS-840 305 051 A 5306

S-ATS-016-4GHz-16
 Part No. 34571
 Vollbestückt mit: SB-810 Z
 Selbstzentrierung: ± 0,2 mm

Interface Blocks

Interface Blocks, loaded with INGUN Test Probes, guarantee best contacting quality and low contact resistance. The INGUN Interface Blocks are used in the Intermediate Interfaces of the INGUN Interchangeable Fixture Kits (e.g. MA 21xx-Series) as well as in external Interfaces (e.g. Rohde&Schwarz, TestStation GR). The Working space is 15.1 ± 0.5 mm.

The in general not loaded RC- and ATS-High-frequency Blocks, prepared for loading of up to 16 High-frequency Test Probes respectively up to 16 Contact Terminals, can be loaded individually with only 1 to max. 16 Test Probes respectively Contact Terminal. Further information see our Product-information of the INGUN Interface Blocks.

Signal Block 170-pole (4 A)



S-RC-170-4A
 Part No. 27616
 Loaded with: GKS-945 357 106 A 1100

S-ATS-170-06
 Part No. 13515
 Loaded with: KT-158 06

Signal Block 170-pole (4 A) Low Ohm



S-RC-170-N-4A
 Part No. 31006
 Loaded with: HSS-118 317 175 A 1102

S-ATS-170-06
 Part No. 13515
 Loaded with: KT-158 06

Optical wave-guide Block 45-pole



S-RC-045-LWL
 Part No. 27618
 Loaded with: KS-004 35 G-K
 Without: LWL (Part No. 20747)

S-ATS-045-LWL
 Part No. 29448
 Loaded with: KS-004 35 G-K
 Without: LWL (Part No. 20747)

Optical wave-guide Block 20-pole for Feasa OH-3



S-RC-020-LWL-F
 Part No. 38696
 Not loaded, loadable with e.g.: 20x Feasa OH-3 (Part No. 33685)

S-ATS-045-LWL
 Part No. 29448
 Loaded with: KS-004 35 G-K
 Without: LWL (Part No. 20747)

High-current Block 24-pole (24 A)



S-RC-24-24A
 Part No. 27628
 Loaded with: HSS-120 317 300 A 2202 M

S-ATS-24-10
 Part No. 27620
 Loaded with: KT-120 L3 E02-30

High-current Block 2-pole (50 A)



S-RC-002-50A
 Part No. 31549
 Loaded with: HSS-150 317 300 A 5002 M

S-ATS-002-50
 Part No. 31550
 Loaded with: KT-150 L3 E03-M3

Pneumatic Block 8-pole RC-block self closing



S-RC-008-PK3-G
 Part No. 37820
 Loaded with: Connector female (Part No. 37819)

S-ATS-008-PK3-G
 Part No. 37821
 Loaded with: Connector male (Part No. 37818)

For Further Interface Blocks see our Product Information INGUN Interface Blocks.



Contacting of RJ-Plugs and USB-Connectors

For contacting RJ- and USB-Plugs with little wear and resistance INGUN offers especially designed and manufactured test plugs, which are manufactured with robust copper-beryllium wires Tooling Pins.


RJ-Plugs	
Part No. 17824	RJ-10, 4-channels
Part No. 17825	RJ-12, 6-channels
Part No. 17826	RJ-45, 8-channels
Part No. 17827	RJ-48, 10-channels
USB Test Plugs	
Part No. 17829	USB Test Plug, 4-channels, type B
Part No. 21072	USB Test Plug Mini, 5-channels, type B
Part No. 34816	USB Test Plug Micro, 5-channels, type B

Mounting Shoes are available for the assembly of all Test Plugs.
Further variations of test plugs are available on request.

Tooling Pins

Rigid Tooling Pins

The Tooling Pins from INGUN register the PC-Board in the applicable Tooling Pin Holes and therefore guaranty an exact registration of the PC-Board on the Test Fixture. The Tooling Pins are available with diameters from 1.9 to 5 mm and in steps of 0.1 mm. They have a tolerance of 0 /-0.05 mm.

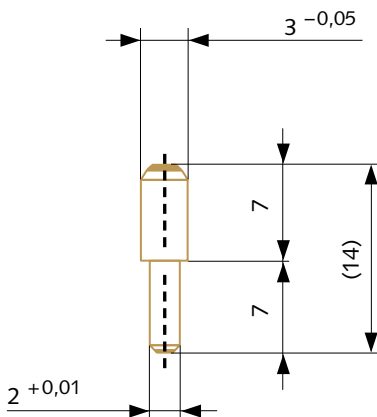

Spring-loaded Tooling Pins GFS-874

To enable high-precision customizing INGUN offers spring-loaded Tooling Pins. In this case the PC-Board is registered via a conical-shaped, spring-loaded Tooling Pin. To customize the Fixture you need a pair of Tooling Pins, i.e. consisting of one cone-shaped Tooling Pin and one dagger-shaped Tooling Pin.



Spring-loaded Tooling Pins as a pair (Dagger and Cone-shaped)

For Tooling Pin Holes:

Ø 2.0 mm to Ø 3.5 mm

Part No. 24481 cone-shaped

Part No. 25214 dagger-shaped

For Tooling Pin Holes:

Ø 3.5 mm to Ø 5.5 mm

Part No. 25215 cone-shaped

Part No. 25217 dagger-shaped

Further special Tooling Pins are available – such as e.g. Tooling Pins with mounting disk, Special Tooling Pins for In-line Systems (e.g. with optical safety check or spring-loaded)



Cleaning Mats

PC-Boards often show signs of flux deposits and oxide layers, which contaminate the surface and create an insulating layer. With the increased

usage of the Test Probes the deposits are transferred to the tips of the Test Probes. INGUN proposes cleaning the tips of the Probes with a Cleaning Mat.

Cleaning is recommended for those tip-styles with self-cleaning features, e.g. 01, 09, 15, 31, 38, 77, 91, 93, 97, 98. Contact Cleaning Mats can be used on all INGUN Test Fixtures without Pressure Frames and are available in various sizes. Sizes and prices on request!


Further details – also in regard to Cleaning Brushes – can be found on the applicable Product Data Sheets.

Insertion and Extraction Tools

Insertion and Extraction Tools enable Test Probes and Receptacles to be inserted and extracted safely, easily and without being damaged. The Insertion Tools are generally equipped with a Handle (SW-H) and an interchangeable Bit. The Bit being in accordance to the specific probe series (e.g. E-SW KS-112).

Tools which can be adjusted in a variable manner are available for Receptacles with a Press-ring for the series GKS-050, GKS-075 and GKS-100. When inserting the Receptacle, the Press-ring is pressed into the mounting hole; the Installation Height of the Test Probe can then be adjusted to meet the applicable application.

Tools for screw-in Probes: see from page 170/171.

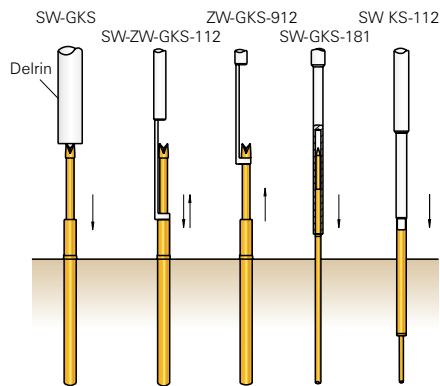

Insertion and Extraction Tools

SW / ZW / AW **NEW** 118

Tool for assembling Screw-in Probes – see pages 170–171

Insertion and Extraction Tools

NEW


Series	Insertion Tool for GKS	Insertion and Extraction Tool for GKS Tip-Ø > Shaft-Ø	Insertion Tool for KS
GKS-001	SW-GKS		
GKS-002	SW-GKS	SW-ZW-GKS-100	SW-KS 100 / SW-KS-100 G ⁽⁴⁾
GKS-003	SW-GKS		SW-KS-102
GKS-004	SW-GKS		
GKS-005	SW-GKS		
XXX-050	SW-GKS-081 ⁽¹⁾		SW-KS-050 G ⁽⁴⁾
GKS-069	SW-GKS-187 B		SW-KS-080
XXX-075		SW-ZW-GKS-075	SW-KS-075 G ⁽⁴⁾
GKS-080		SW-ZW-GKS-080	SW-KS-080
GKS-081	SW-GKS-081 ⁽¹⁾		SW-KS-080
GKS-098	SW-GKS		SW-KS-103
XXX-100	SW-GKS-100 B ⁽¹⁾	SW-ZW-GKS-100	SW-KS 100 / SW-KS-100 G ⁽⁴⁾
GKS-101		SW-ZW-GKS-101	SW-KS-101
GKS-102		SW-ZW-GKS-112	SW-KS-102
GKS-103		SW-ZW-GKS-103	SW-KS-103
GKS-112		SW-ZW-GKS-112	SW-KS-112
GKS-113		SW-ZW-GKS-103	SW-KS-113
GKS-135	SW-GKS-100 B ⁽¹⁾	SW-ZW-GKS-100	SW-KS 100 / SW-KS-100 G ⁽⁴⁾
GKS-181	SW-GKS-181 ⁽¹⁾	ZW-GKS-912	SW-KS-181
GKS-204	SW-GKS-912 A ⁽²⁾ / 912 B ⁽³⁾	ZW-GKS-912	SW-KS-112
GKS-412		SW-ZW-GKS-112	SW-KS-112
XXX-422	SW-GKS-912 A ⁽²⁾ / 912 B ⁽³⁾	ZW-GKS-912	SW-KS-112
GKS-502		SW-ZW-GKS-112	SW-KS-102
GKS-503		SW-ZW-GKS-103	SW-KS-103
GKS-550	SW-GKS-181 ⁽¹⁾		SW-KS-050 G ⁽⁴⁾
GKS-710		ZW-GKS-912	SW-KS-112
GKS-713	SW-GKS		SW-KS-113
GKS-714	SW-GKS		SW-KS-113
GKS-725		SW-ZW-GKS-100	SW-KS-100
GKS-912	SW-GKS-912 A ⁽²⁾ / 912 B ⁽³⁾	ZW-GKS-912	SW-KS-112
GKS-913		SW-ZW-GKS-103	SW-KS-113
GKS-967	SW-GKS		SW-KS-102
HSS-118		SW-ZW-GKS-112	SW-KS-112
HSS-120		SW-ZW-GKS-103	SW-KS-113
HSS-150	SW-GKS		
PKS-200/220	SW-GKS		SW-KS-102
PKS-300/299	SW-GKS		SW-KS-103
SKS-100		SW-ZW-GKS-100	SW-KS-100 G ⁽⁴⁾
SKS-215		SW-ZW-GKS-112	SW-KS-112
SKS-415/425		SW-ZW-GKS-103	SW-KS-113
SKS 419/429	SW-SKS-419-429-300		
SKS 419/429	SW-SKS-419-429-500		

⁽¹⁾ Insertion Tool for Plunger with continuous Shaft
⁽³⁾ for Tip Style „09“ ⁽⁴⁾ free adjustable

⁽²⁾ universal usage
⁽⁵⁾ Extraction Tool


SW-KS-xxx G (4): Variably adjustable Insertion Tool, for Receptacle with Press-ring (* can be purchased individually)

SW-GKS: Universal Insertion Tool for GKS

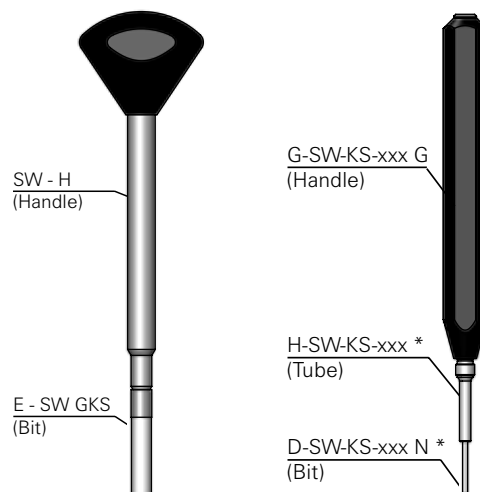

AW-KS-Set-ICT: Extraction Tool for KS (ICT)

NEW

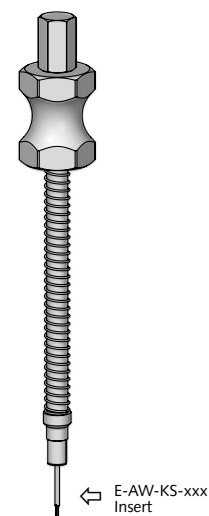

The Set for extraction of Receptacles contains the Bits E-AW-KS-xxx for Test Probe series GKS-040/050/075/100:

Extraction Tool for Set ICT	AW-KS-Set-ICT
Bit for KS-040 (Spare Part)	E-AW-KS-040
Bit for KS-050 (Spare Part)	E-AW-KS-050
Bit for KS-075 (Spare Part)	E-AW-KS-075
Bit for KS-100 (Spare Part)	E-AW-KS-100

Note:

Tools for Screw-in Test Probes page 170/171.
 Tools for RF-Probes can be found in our present RF Catalog .

Ordering Example

Insertion and Extraction Tools for GKS 112:

SW - ZW - GKS - 112

Insertion Tools for GKS 912:

SW - GKS - 912 A or SW - GKS - 912 B

Bits for Insertion tools GKS 912:

E - SW - GKS - 912 A or E - SW - GKS - 912 B

Extraction Tool for Receptacles:

AW - KS - Set - ICT

Cable Harness Test Probes

Screw-in Test Probes

Screw-in High-current Probes

Screw-in Switching Probes


RF/Digital

Non-rotating Probes

Push-back Probes

Tools

Test Probes for Cable Harness Testing

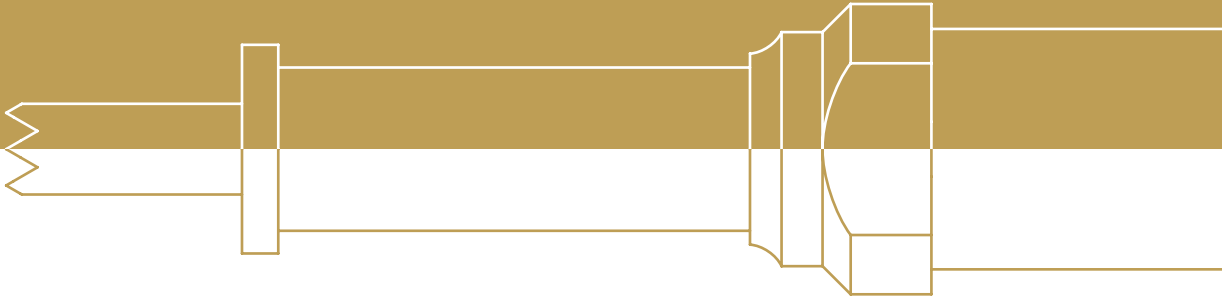

Contents: Cable Test Probes

Grid in mm (MII)	Recommended Stroke in mm	Max. Stroke in mm	Current Rating in A	ICT / FCT	Combined ICT-/FCT-Test	Cable Harness Probes	Solderable Probes	Battery Probes	Micro-Contacting	RF-Applications	High-Current Applications	High Temperature Range	Component Presence Check	Individually controllable Probes	Interface Probes	Low Installation Height	High Installation Height	Short-stroke Probes	Long-stroke Probes	Through (continuous) Plunger	Non-Rotating Probes	Rotating Probes	High Spring Forces	Stroke-measurement Probes	Series	Page	
Screw-in Test Probes																											
1,27	4,3	6,35	3			•						•													GKS-050 M	126	
1,27	4	5	3			•										•									GKS-087 M	127	
1,91	4,3	6,35	4			•						•	•												GKS-075 M	128	
2,54	3,5	4,5	5 – 8			•										•									GKS-427 M	129	
2,54	3,5	4,5	16			•					•	•				•									HSS-827 M	129	
2,54	3,5	4,4	3 – 5			•										•									GKS-899 M	130	
2,54	3,5	4,4	3 – 5			•																			T-899 M	131	
2,54	4	5,3/8	5 – 8			•						•	•										•		GKS-112 M	132	
2,54	4	5	5 – 8			•																	•		T-112 M	133/134	
2,54	4	5	5 – 8			•																	•		T-912 M	133/134	
4	4	5,3	5 – 8			•						•												•	GKS-113 M	135	
4	4	5	5 – 8			•																	•		T-113 M	136/137	
4	4	5	5 – 8			•																	•		T-888 M	136/137	
5,08	4,4	5,5	10 – 12			•						•													GKS-854/854M	138	
4,5	5,6	7	5 – 15			•					•									•			•		GKS-500 M	139	
2,54	12	14,5	2 – 3			•											•								GKS-212 M	140	
5,08	12	14,3	3 – 5			•											•								GKS-313 M	141	
4	2,8	3,5	5 – 8			•										•		•							GKS-913 M	142	
Screw-in High-current Probes																											
2,54	4	5,3/8	16			•					•	•														HSS-118 M	144
4	4	5,3	24			•					•	•														HSS-120 M	145
5,08	4,4	5,5	50			•					•	•											•			HSS-150 M	146
5,08	2	2,5	50			•					•	•			•			•								HSS-552 M	146
Screw-in Switching Probes																											
2,54	4	5	3			•							•													SKS-215 M/MF	148
3,5	4	5,2	3			•							•										•			SKS-465 MF	149
3,5	4	4,5	3			•							•										•			SKS-465 SF	150
4,5	8	6	3			•							•			•							•			SKS-435 M	151
RF/Digital																											
						•				•																HFS	152/154
Non-rotating Probes																											
4,5	6,4	8	5 – 15			•					•									•	•		•			GKS-803 M	156
2,54	4	5	5 – 8			•																				GKS-710	157
5,08	4/6	5/7	8 – 10			•																				GKS-714	158
5,08	4	5	8 – 10			•																				GKS-098	158
5,08	4	5	8 – 10			•																				GKS-098 M	159
2,54	4	4,4	8 – 10			•																				GKS-746 M	160
4	4	5	8 – 10			•																				GKS-747 M	161
Push-back Probes																											
2,54	5	6	5			•										•				•	•		•			VF 25	164
3	5	5,5	8			•										•				•	•		•			VF 3	165
4	5	7	8			•					•					•				•	•		•			VF 4	166
5	9,5	12	10			•					•					•		•		•	•		•			VF 5	167
Screw-in Tools for screw-in Probes																											
Tools																											
																										BIT/DW/SW	170/171


Test Probes for Cable Harness Testing

Due to the progressive development in the automobile industry the complexity of the Cable Harnesses is also increasing. To meet these demands INGUN has extended the range of variants of standard Cable Harness Test Probes. Apart from the renowned series the range of Screw-in and Step-Probes, Push-back Probes, High-current Probes and the choice of Kelvin/RF Probes has been enhanced.




The following Test Probes are mainly used for testing Cable Harnesses and Connectors. Especially the Screw-in Probes (with end index "M") and the Push-back Probes (VFxx) offer an optimal reliability against the creeping out of the Test Probe out of the Receptacle.

Screw-in variants are also available within various standard series. Further special designs and variants are available on request.

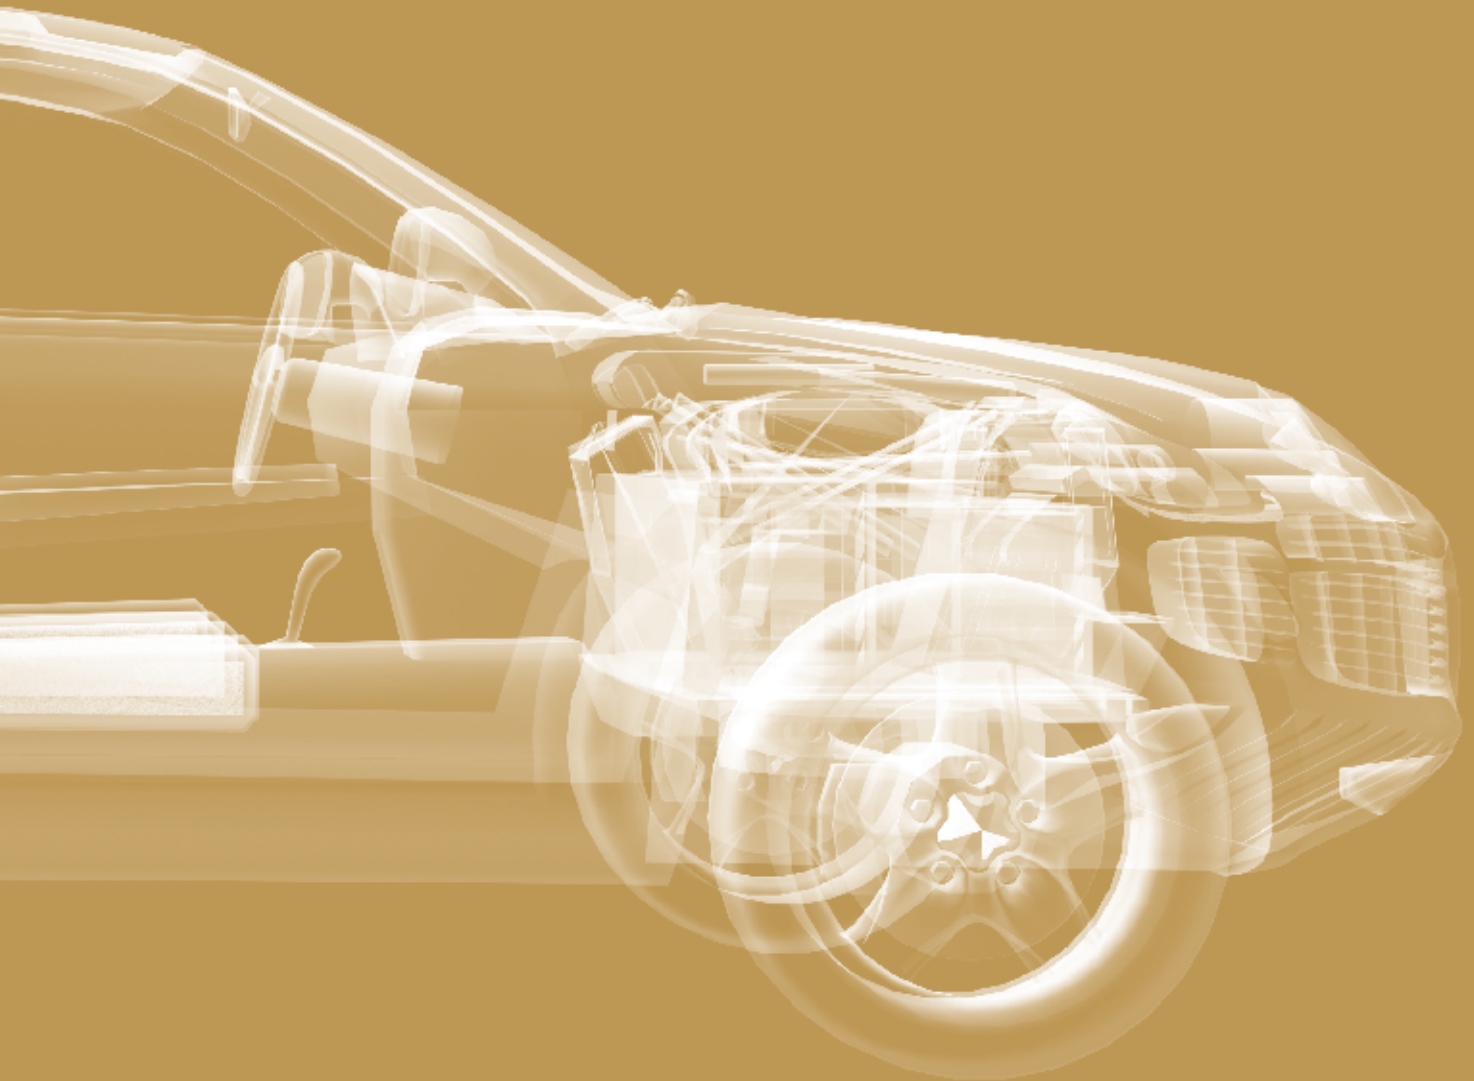

Notes

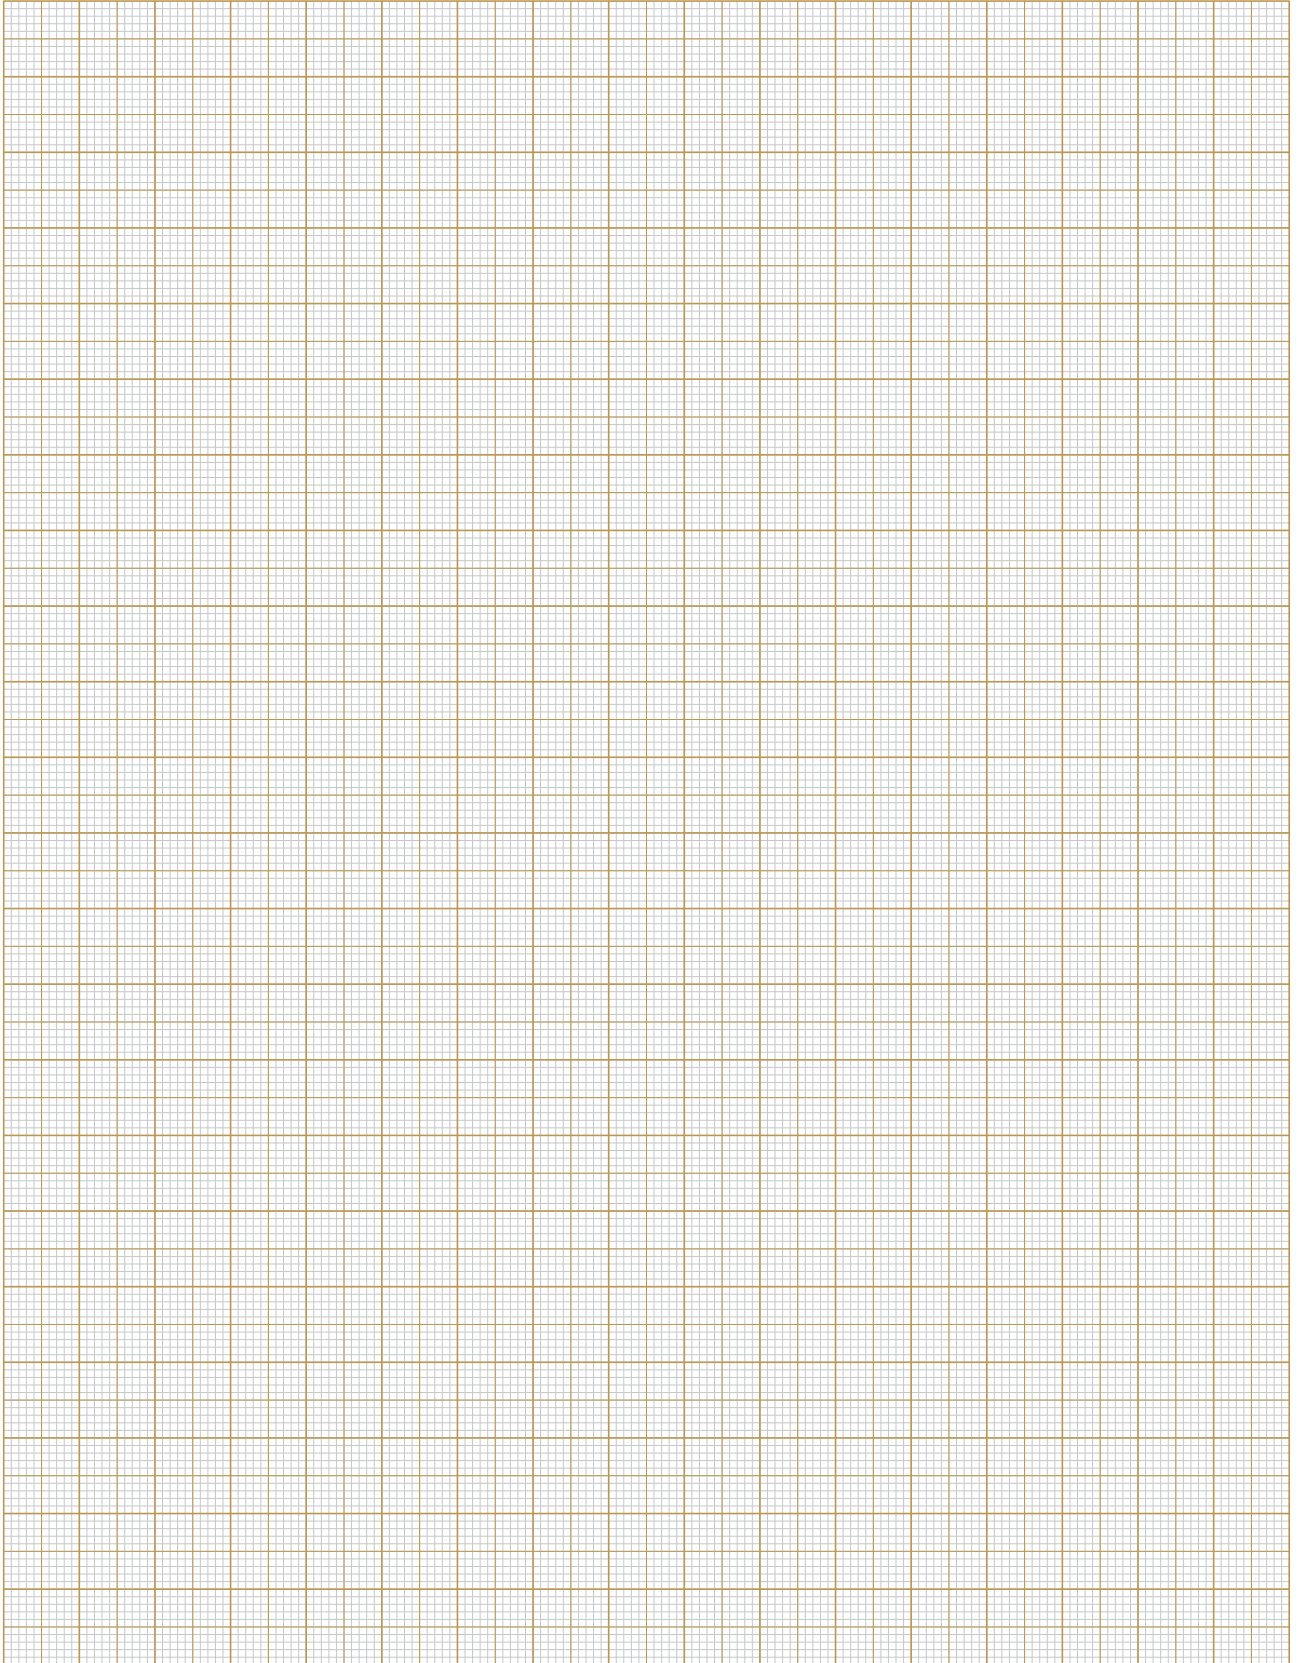


Screw-in Test Probes

Screw-in Test Probes are always marked with the end index „M“. They are mainly used for testing Cable Harnesses and Connectors in Cable Test Tables. The Test Probe, which has the thread on the bottom end, is screwed into the Receptacle (that has the applicable internal thread) using a special screwing tool (see page 170/171).

The screw connection ensures that the Test Probe has a secure hold in the Receptacle even under difficult application conditions (i.e. snapping effect, assembly upside down etc.). Furthermore, a flexible exchange of the Test Probe is also guaranteed.

Spring-Loaded Test Probe (GKS) and Receptacle (KS) for screw-in connection (GKS and KS with thread)

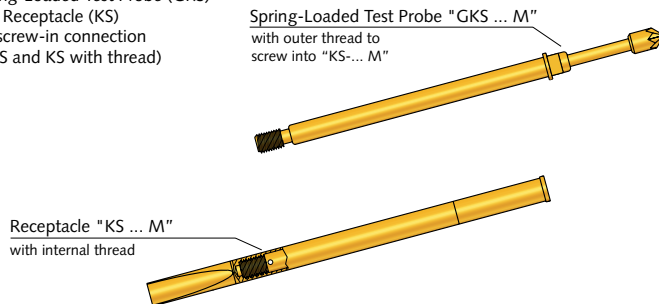

Screw-in Test Probes

GKS-050 M		126
GKS-087 M		127
GKS-075 M		128
GKS-427 M		129
HSS-827 M		129
GKS-899 M		130
T-899 M		131
GKS-112 M		132
VS-112 M		132
T-112 M	NEW	133/134
T-912 M	NEW	133/134
GKS-113 M		135
T-113 M	NEW	136/137
T-888 M	NEW	136/137
GKS-854/854 M		138
GKS-500 M		139
GKS-212 M		140
GKS-313 M		141
GKS-913 M		142
GKS-204 M		55
GKS-103 M		60
GKS-503 M		61
GKS-967 M		68
GKS-761 M		69

Insertable Test Probes GKS from page 17 on.

GKS 050 M

Screw-in Test Probe

Grid:



≥ 1,27 mm

≥ 50 Mil

Installation Height: 10,5 / 12,5 mm (.413 - .492)


Recommended Stroke: 4,3 mm (.169)

Mounting and Functional Dimensions

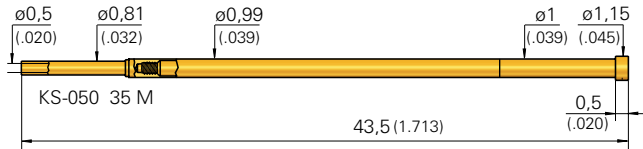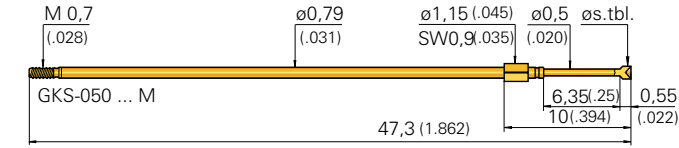

Collar Height and Installation Height

The Installation Height of the Tip (measured with the Receptacle) is determined by the Collar Height of the Receptacle.



Collar Height	Installation Height
03 M	10,5 mm (.413)
03 ML	12,5 mm (.492)

Mechanical Data

Working Stroke: 4,3 mm (.169)

Maximum Stroke: 6,35 mm (.250)

Spring force at Work. Stroke: 1,5 N (5.4oz)

alternative: 1,0 N (3.6oz); 2,0 N (7.2oz)

Electrical Data

Current Rating: 2 - 3 A

R_j typical: < 20 mΩ (** < 100 mΩ)

Operating Temperature

Standard: -40° up to +80° C

****with Spec. Designation "MC":** -100° up to +200°C (2,0 N)

Materials

Plunger: BeCu or Steel, gold-plated

Barrel: Brass, gold-plated

Spring: Steel, gold-plated

or Stainless Steel** (MC)

Receptacle: Brass, gold-plated

Mounting Hole Size

in CEM 1: ø1,00 - 1,02 mm (.0394-.0401)

in FR 4: ø1,01 - 1,03 mm (.0398-.0405)

Note:

The Receptacle KS-050 ... M is available pre-wired with 1 m Wire AWG 30 (see Ordering Example).

Available Tip Styles

Material	Tip Style	Plating	Further Versions	
			∅	∅ (inch)
NEW 2 01		A	∅ 0,50 (.020)	
NEW 3 02		A	∅ 0,60 (.023)	
3 03		A	∅ 0,50 (.020)	0,90 (.035)
3 05		A	∅ 0,50 (.020)	
3 06		A	∅ 0,90 (.035)	
NEW 3 07		A	∅ 0,50 (.020)	0,90 (.035)
2 14		A	∅ 0,50 (.020)	
2 22*		A	∅ 0,40 (.020)	
2 31		A	∅ 0,50 (.020)	
2 38		A	∅ 0,50 (.020)	
2 77		A	∅ 0,50 (.020)	
2 91		A	∅ 0,50 (.020)	
2 97		A	∅ 0,50 (.020)	

* conical down to ∅ 0,50 mm

Available Tip Styles

Special Version GKS-050 ... ML

Material	Tip Style	Plating	Further Versions	
			∅	∅ (inch)
2 91		A	∅ 0,50 (.020)	

Total Length 49,3 mm (1.941), Special Designation „ML“

Note:

GKS-050 ... M will be screwed into KS-050 ... M using special tools, see Page 170/171.

Recommended Screw-in Torque:
Min.: 0,5 Ncm / Max.: 1 Ncm

Ordering Example

Series	Tip Material	Tip Style	Tip Diameter (1/100 mm)	Plating	Spring Force (dN)	Collar Height (mm)	Special Designation „MC“
	2 = Steel 3 = BeCu			A = Gold			

Test Probe with Total Length 47,3 mm (1.862):

G K S 0 5 0 2 9 1 0 5 0 A 1 5 0 3 M

Receptacles:

K S - 0 5 0 3 5 M K S - 0 5 0 3 5 M - V - 30


Insertion Tool for KS-050 ... M:

S W - K S - 0 8 0

Grid:
 ≥ 1,27 mm
 ≥ 50 Mil

Installation Height: 7,2 / 8,2 mm (.283 / .323)
Recommended Stroke: 4,0 mm (.157)



Mounting and Functional Dimensions

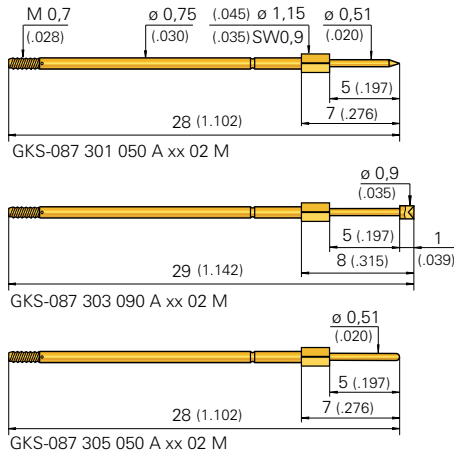

Available Tip Styles

Material	Tip Style	Plating	Further Versions	
			∅	∅ (inch)
3 01		A	∅ 0,50 (.020)	
3 03		A	∅ 0,90 (.035)	
3 05		A	∅ 0,50 (.020)	

Receptacles

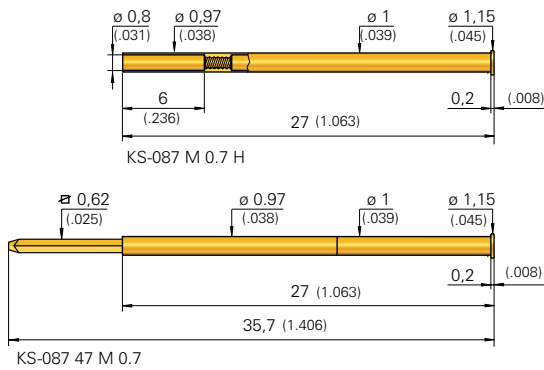

GKS-087 ... M GKS-087 303 ... M
 (with KS-087...)

Collar Height and Installation Height

The Installation Height of the Tip (Dimension with Receptacle) is determined by the Collar Height and the Tip Style. The Collar Height of the series GKS-087 is always 02.

Collar Height	Tip Style	Diameter	Installation Height
02 M	01	0,50 (.020)	7,2 mm (.283)
02 M	03	0,90 (.035)	8,2 mm (.323)
02 M	05	0,50 (.020)	7,2 mm (.283)

Mechanical Data

Working Stroke: 4,0 mm (.157)
Maximum Stroke: 5,0 mm (.197)
Spring Force at Work. Stroke: 0,5 N (1.8oz)
alternative: 0,8 N (2.9oz)

Materials

Plunger: BeCu, gold-plated
Barrel: Brass, gold-plated
Spring: Steel, gold-plated
Receptacle: Brass, gold-plated

Electrical Data

Current Rating: 2 - 3 A
R_j typical: < 20 mΩ

Mounting Hole Size

in CEM 1: ∅1,00 - 1,02 mm (.0394-.0401)
in FR 4: ∅1,01 - 1,03 mm (.0398-.0405)

Operating Temperature

Standard: -40° up to +80° C

Note:

GKS-087 ... M will be screwed into KS-087 ... M using special tools, see Page 170/171.

Recommended Screw-in Torque:
 Min.: 0,5 Ncm / Max.: 1 Ncm

Ordering Example

Series	Tip Material 3 = BeCu	Tip Style	Tip Diameter (1/100 mm)	Plating A = Gold	Spring Force (dN)	Collar Height (mm)	Special Designation
--------	--------------------------	-----------	----------------------------	---------------------	----------------------	-----------------------	---------------------

Test Probe:

G K S 0 8 7 3 0 5 0 5 0 A 0 5 0 2 M

Receptacles:

K S - 0 8 7 M 0,7 H K S - 0 8 7 4 7 M 0,7

GKS 075 M

Screw-in Test Probe

Grid:





≥ 1,91 mm

≥ 75 Mil

Installation Height: 10,5 mm (.413)

Recommended Stroke: 4,3 mm (.169)

Mounting and Functional Dimensions

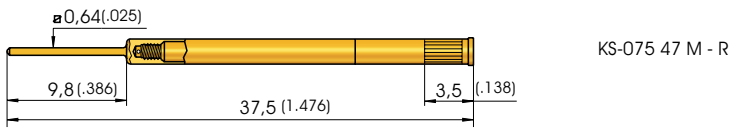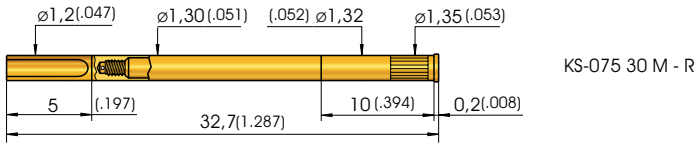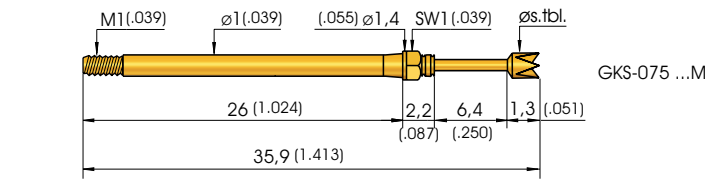

Collar Height and Installation Height

The Installation Height of the Tip is 10,5 mm (.413). The Test Probe can only be used with a Receptacle.

Mechanical Data

Working Stroke: 4,3 mm (.169)
Maximum Stroke: 6,35 mm (.250)
Spring Force at Work. Stroke: 2,0 N (7.2oz)
alternative: 0,6 N (2.2oz); 1,0 N (3.6oz); 1,5 N (5.4oz); 2,8 N (10.1oz)

Electrical Data

Current Rating: 3 - 4 A
R_j typical: < 20 mΩ (** < 100 mΩ)

Operating Temperature

Standard: -40° up to +80° C
****with Spec. Desig. "MC":** -100° up to +200° C (2,0 N; 2,8 N)

Materials

Plunger: BeCu or Steel, gold-plated
Barrel: Brass, gold-plated
Spring: Steel, gold-plated or Stainless Steel
 ** (MC)

Mounting Hole Size

in CEM 1 and FR 4: ø 1,32 - 1,34 mm (.0520 - .0528)

Note:

GKS-075 ... M will be screwed into KS-075 ... M using special tools, see Page 170/171.

Recommended Screw-in Torque:
 Min.: 0,5 Ncm / Max.: 1 Ncm

Available Tip Styles

Material	Tip Style	Plating	Further Versions	
			ø	ø (inch)
0 06*		A	ø 1,30 (.051)	
2 01		A	ø 0,64 (.025)	
NEW 3 02		A	ø 0,90 (.040)	
3 03		A	ø 1,20 (.047)	
2 04		A	ø 1,15 (.045)	
3 05		A	ø 0,50 (.020)	
3 05		A	ø 0,64 (.025)	
3 06		A	ø 1,00 (.039)	1,20 (.047)
2 07		A	ø 0,64 (.025)	1,00 (.039) 1,20 (.047)
2 09		A	ø 0,64 (.025)	
3 13		A	ø 0,61 (.024)	
2 14		A	ø 0,50 (.020)	0,64 (.025) 0,80 (.031) 1,00 (.039)
2 17		A	ø 1,20 (.047)	
2 24***		A	ø 1,30 (.051)	
2 25		A	ø 1,20 (.047)	1,30 (.051)
2 31		A	ø 0,64 (.025)	
2 77		A	ø 0,64 (.025)	
2 91		A	ø 0,64 (.025)	
2 97		A	ø 0,64 (.025)	0,80 (.031)
2 98		A	ø 0,64 (.025)	

* Tip Height: 2,8 mm (.110), Total Length GKS 1,5 mm (.059) longer than Standard
 Further Tip Styles see GKS-075, Page 26/27
 *** higher middle tip plus 0,2 mm

Ordering Example



Series	Tip Material 2 = Steel 3 = BeCu	Tip Style	Tip Diameter (1/100 mm)	Plating A = Gold	Spring Force (dN)	Collar Height (mm)	Special Designation alternative „MC“
Test Probe:	G K S	0 7 5	2 0 1	0 6 4	A	1 5	0 2 M
Receptacles for GKS-075 ... M:	K S - 0 7 5	3 0 M - R	K S - 0 7 5	4 7 M - R			

Grid:
 ≥ 2,54 mm
 ≥ 100 Mil

Installation Height: 8,7 mm (.343)
 Recommended Stroke: 3,5 mm (.138)

Mounting and Functional Dimensions




GKS-427 M

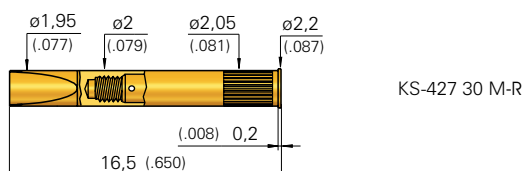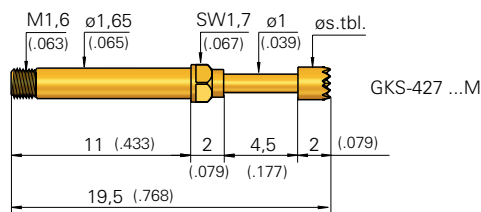

Available Tip Styles GKS 427 M

Material	Tip Style	Plating	Further Versions	
			∅	∅ (inch)
2 01		A	∅ 1,00 (.039)	
3 06		A	∅ 2,00 (.079)	

HSS-827 M

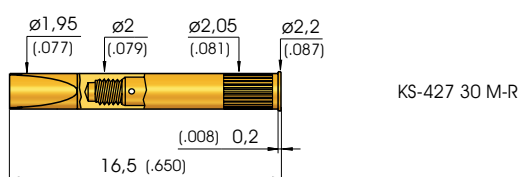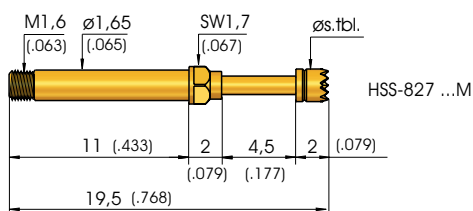

Available Tip Styles HSS 827 M

Material	Tip Style	Plating	Further Versions	
			∅	∅ (inch)
3 02		S	∅ 2,00 (.079)	
3 06		A	∅ 2,00 (.079)	

Collar Height and Installation Height

The Installation Height of the Tip is always 8,7 mm (.343). The Test Probe can only be used with a Receptacle.

Mechanical Data

Working Stroke: 3,5 mm (.138)
Maximum Stroke: 4,5 mm (.177)
Spring Force at Work. Stroke: 1,5 N (5.4oz)
alternative: *2,5 N (9.0oz)

Electrical Data

GKS 427 M
Current Rating: 5 - 8 A
R_i typical: < 20 mΩ

Operating Temperature

GKS 427 M
Standard: -40° up to +80° C
*** with Special Designation „MC“:**
 -100° up to +200° C
 1,5 N (5.4oz); 2,5 N (9.0oz)

Mounting Hole Size

for KS-427 30 M-R
in CEM 1 and FR 4: ∅ 2,00 - 2,02 mm
 (.0787 - .0795)

Materials

Plunger: Steel or BeCu, gold-plated
Barrel: Brass, gold-plated
Spring: Stainless Steel (*MC) or Steel, gold-plated
Receptacle: Brass, gold-plated

Electrical Data

HSS 827 M
Current Rating: max. 16 A
R_i typical: < 10 mΩ

Operating Temperature

GKS 827 M
Standard: -40° up to +80° C
*** with Special Designation „MC“:**
 -100° up to +200° C
 1,5 N (5.4oz); 2,5 N (9.0oz)

Note:

GKS-427 ... M will be screwed into KS-427 ... M-R using special tools, see Page 170/171.

Recommended Screw-in Torque:
 Min.: 3 Ncm / Max.: 5 Ncm

Ordering Example

Series	Tip Material	Tip Style	Tip Diameter (1/100 mm)	Plating	Spring Force (dN)	Collar Height (mm)	Type
	2 = Steel 3 = BeCu			A = Gold S = Silver			

Test Probe:

G K S 4 2 7 3 0 6 2 0 0 A 1 5 0 2 M

Test Probe:

H S S 8 2 7 3 0 2 2 0 0 S 1 5 0 2 M

Receptacle for GKS-427 ... M:

K S - 4 2 7 3 0 M - R

GKS-899 M

Screw-in Step Probes

Grid:



≥ 2,54 mm

≥ 100 Mil

Installation Height: 12,8 (.504)

Recommended Stroke: 3,5 mm (.138)

Mounting and Functional Dimensions

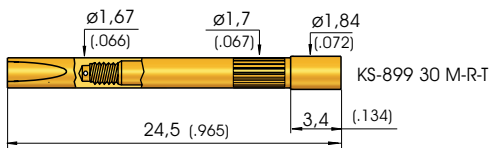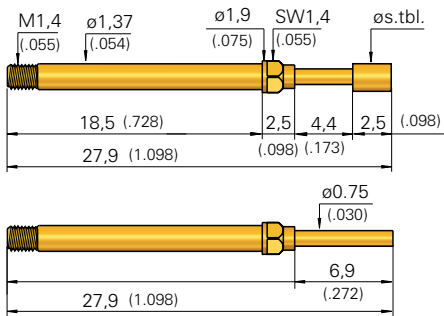


** axially positioned trough-hole for leakage test. Attention: when not assembled correctly, then solder can flow inside the receptacle.

Available Tip Styles

Material	Tip Style	Plating	Further Versions	
			ϕ	ϕ (inch)
2	01	A		
3	02	A	0,65	(.026)
3	02	A		
3	03	A		
3	05	A	0,65	(.026)
3	06	A		
3	06	A		
3	13	A		

NEW



Collar Height and Installation Height

The Installation Height of the Tip is always 12,8 mm (.504). The Test Probe can only be used with a Receptacle.

Mechanical Data

Working Stroke: 3,5 mm (.138)
Maximum Stroke: 4,4 mm (.173)
Spring Force at Work. Stroke: 1,5 N (5.4oz)
alternative: 0,7 N (2.5oz); 2,5 N (9.0oz)
 3,0 N (10.8oz)

Electrical Data

Current Rating: 3 - 5 A
R_i typical: < 20 m Ω

Materials

Plunger: Steel or BeCu, gold-plated
Barrel: Brass, gold-plated
Spring: Steel, gold-plated
Receptacle: Brass, gold-plated

Mounting Hole Size

in CEM 1 and FR 4: ϕ 1,67 - 1,68 mm
 (.0657 - .0661)

Operating Temperature

Standard: -40° up to +80° C

Note:

GKS-899 ... M will be screwed into KS-899 ... M-R using special tools (see page 170/171).



Recommended Screw-in Torque:
 Min.: 2 Ncm / Max.: 3 Ncm

Ordering Example


Series	Tip Material 2 = Steel 3 = BeCu	Tip Style	Tip Diameter (1/100 mm)	Plating A = Gold R = Rhodium	Spring Force (dN)	Collar Height (mm)	Type
Test Probe:	G K S	8 9 9	3 0 6	1 3 0	A	1 5	0 2 M
Receptacle for GKS-899 ... M:	K S - 8 9 9 3 0 M - R - T						
Receptacle for Leakage Test **:	K S - 8 9 9 3 0 M - R						

Grid:
 ≥ 2,54 mm
 ≥ 100 Mil
Installation Height: see table
Recommended Stroke: 3,5 mm (.138)

Mounting and Functional Dimensions

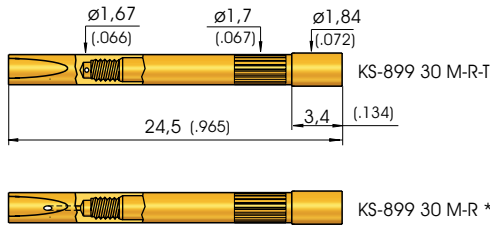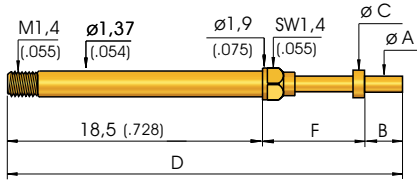

KS-899 30 M-R-T
 KS-899 30 M-R **
 ** axially positioned trough-hole for leakage test. Attention: when not assembled correctly, then solder can flow inside the receptacle.



Available Tip Styles

Material	Tip Style	Plating	Further Versions	
			Ø	Ø (inch)
3 02	Ø s. Table	A		
3 05	Ø s. Table	A		
3 05 G	Ø s. Table	A		

Collar Height and Installation Height
 Installation Height see table below.
 The Test Probe can only be used with a Receptacle.

Mechanical Data

Working Stroke: 3,5 mm (.138)
Maximum Stroke: 4,4 mm (.173)
Spring Force at Work. Stroke: 1,5 N (5.4oz)
alternative: 0,7 N (2.5oz); 3,0 N (10.8oz)

Electrical Data

Current Rating: 3 - 5 A
R_i typical: < 20 mΩ

Materials

Plunger: Steel or BeCu, gold-plated
Barrel: Brass, gold-plated
Spring: Steel, gold-plated
Receptacle: Brass, gold-plated

Mounting Hole Size

in CEM 1 and FR 4: Ø 1,67 - 1,68 mm (.0657 - .0661)

Operating Temperature

Standard: -40° up to +80° C

Note:

T-899 ... M will be screwed into KS-899 ... M-R (-T) using special tools (see page 170/171) *.

Details of Torque Tools and Insertion Bits from page 170 on.

Recommended Screw-in Torque:
 Min.: 2 Ncm / Max.: 3 Ncm

Part No.	A Tip-Ø mm	B Tip Length mm	C Disk-Ø mm	D Total Length mm	E Install. Height with KS mm	F Disk Height without KS mm	Working Stroke mm	Max. Stroke mm	* Tools (Insertion Bits)
T-899 302 065 210 150 A 1502 M	0,65 (.026)	2,1 (.083)	1,5 (.059)	28,0 (1.102)	12,9 (.508)	7,4 (.291)	3,5 (.138)	4,4 (.173)	BIT-GKS-899 M-B
T-899 305 065 280 150 A 1502 M	0,65 (.026)	2,8 (.110)	1,5 (.059)	28,7 (1.130)	13,6 (.535)	7,4 (.291)	3,5 (.138)	4,4 (.173)	BIT-GKS-899 M-B
T-899 305 065 400 150 A 1502 M	0,65 (.026)	4,0 (.158)	1,5 (.059)	29,9 (1.177)	14,8 (.583)	7,4 (.291)	3,5 (.138)	4,4 (.173)	BIT-GKS-899 M-B
T-899 305 070 400 150 A 1502 M	0,70 (.028)	4,0 (.158)	1,5 (.059)	29,9 (1.177)	14,8 (.583)	7,4 (.291)	3,5 (.138)	4,4 (.173)	BIT-GKS-899 M-B
T-899 305 065 270 150 A 1502 MG	0,65 (.026)	2,7 (.106)	1,5 (.059)	27,1 (1.067)	12,0 (.472)	5,9 (.232)	2,0 (.079)	2,75 (.110)	BIT-GKS-899 M-B
T-899 305 065 340 150 A 1502 MG	0,65 (.026)	3,4 (.134)	1,5 (.059)	27,8 (1.095)	12,7 (.500)	5,9 (.232)	2,0 (.079)	2,75 (.110)	BIT-GKS-899 M-B

Ordering Example Series

Tip Materials: 3 = BeCu
 Tip Style
 Tip-Ø (1/100 mm) (A)
 Tip Length (1/100 mm) (B)
 Disk-Ø (1/100 mm) (C)
 Plating: A = Gold
 Spring Force (dN)
 Collar Height (mm)
 Special Designation alternative „MG“

Test Probe:

T 8 9 9 3 0 2 0 6 5 2 1 0 1 5 0 A 1 5 0 2 M

Receptacle for T-899 ... M:

KS - 8 9 9 3 0 M - R - T

Receptacle for Leakage Test **:

KS - 8 9 9 3 0 M - R

GKS 112 M

Screw-in Test Probe

Grid:



≥ 2,54 mm

≥ 100 Mil

Installation Height: 10,5/13,6/19,0 mm (.413/535/.748)

Recommended Stroke: 4,0 / 6,4 mm (.157/.252)



Mounting and Functional Dimensions

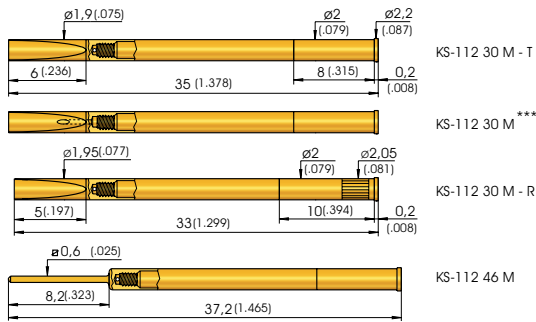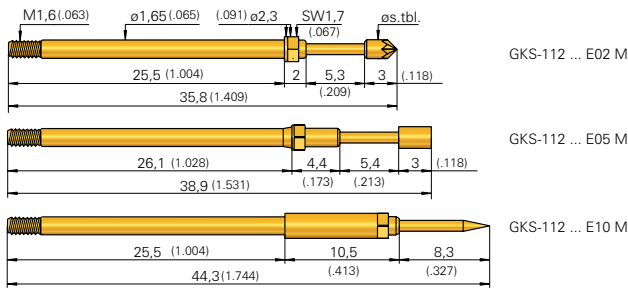

**** axially positioned trough-hole for leakage test. Attention: when not assembled correctly, then solder can flow inside the receptacle.

Plug VS-112 M is used instead of a Test Probe and prevents in case of maintenance, that not required Receptacles will accidentally be used.

VS-112 M



Collar Height and Installation Height

The Installation Height of the Tip (measured with the Receptacle) is determined by the Collar Height. The Test Probe can only be used with a Receptacle.

Collar Height	Installation Height
02	10,5 mm (.413)
05	13,6 mm (.535)
10	19,0 mm (.748)

Mechanical Data

Working Stroke: 4,0 mm (.157)
Maximum Stroke: 5,3 mm (.209)
Spring Force at Work. Stroke: 1,5 N (5.4oz)
alternative: 0,6 (2.1oz); 0,8 (2.9oz); 2,25 (8.1oz); 3,0 (10.8oz); 5,0 N (18.1oz)

Test Probes with Tip Diameter ≤ 1,0 mm (.039) have a maximum Working Stroke of 8,0 mm (.315)
 Exception: 5,0 N-Spring (18.1oz): max. Stroke is always 5,3 mm (.209)

Electrical Data

Current Rating: 5 - 8 A
R_i typical: < 20 mΩ
 (with Spec. Design. "MC" < 100 mΩ)

Materials

Plunger: Steel or BeCu, gold-, rhodium or chemically nickel-plated
Barrel: Brass, gold-plated
Spring: Steel, gold-plated or Stainless Steel (MC)
Receptacle: Brass, gold-plated

Mounting Hole Size

for KS-112 xx M and KS-112 xx M-T in CEM 1 and FR 4: ø 1,99 mm (.0783)
for KS-112 xx M - R in CEM 1 and FR 4: ø 2,00 - 2,02 mm (.0787 - .0795)

Operating Temperature

Standard: -40° up to +80° C
with Spec. Design.. „MC“: -100° up to +200° C
 (0,8; 1,5; 2,25; 3,0 N)

Available Tip Styles

Material	Tip Style	Plating	Further Versions	
			ø	ø (inch)
2	01	R A	ø 1,00 (.039)	0,80 (.031)
3	02	A	ø 0,80 (.031)	
3	02	A	ø 2,00 (.079)	1,00 (.039) 1,50 (.059)
3	03	A	ø 2,00 (.079)	1,40 (.055) 1,80 (.071)
2	04	R	ø 2,00 (.079)	1,30 (.051)
3	05**	A	ø 0,63 (.025)	
3	05	A	ø 0,64 (.025)	0,80 (.031)
3	05	A	ø 2,00 (.079)	1,00 (.039) 1,40 (.055) 2,30 (.091)
0	06*	A	ø 2,30 (.091)	
3	06	A	ø 2,00 (.079)	
3	06	R	ø 1,30 (.051)	1,50 (.059) 1,80 (.071) 2,50 (.098)
2	07	R A	ø 2,00 (.079)	1,30 A (.051)
2	09***	N	ø 0,60 (.024)	
2	14	A	ø 1,30 (.051)	1,30 R (.051)
2	17	N	ø 1,75 (.069)	2,00 R (.079)
3	19	A	ø 1,80 (.071)	2,00 A (.079)

* also available as Tip Style 0 02 and 0 03
 Installation Height plus 0,8 mm (.031)

** Plunger with defined wobble, Spec. Designation ... MT

*** pressed-in Steel point in Base Plunger made of Brass

Note:
 GKS-112 ... M will be screwed into KS-112 ... M using special tools, see Page 170/171.

Recommended Screw-in Torque:
 Min.: 3 Ncm / Max.: 5 Ncm

Ordering Example

Series	Tip Material	Tip Style	Tip Diameter (1/100 mm)	Plating	Spring Force (dN)	Collar Height (mm)	Special Designation alternative „MC“, „MT“
	1 = Delrin 2 = Steel 3 = BeCu			A = Gold N = Nickel R = Rhodium			

Test Probe:

G K S 1 1 2 2 0 4 1 3 0 R 1 5 0 2 M

Receptacle for GKS-112 ... M:

see above

Plug:

V S 1 1 2 M



NEW

T-112 M / T-912 M

Screw-in Step Probes

Grid:
(dependant on max. tip-diameter) ≥ 2,54 mm
(dependant on max. tip-diameter) ≥ 100 Mil
Installation Height: see table
Recommended Stroke: 4,0 mm (.157)

Mounting and Functional Dimensions

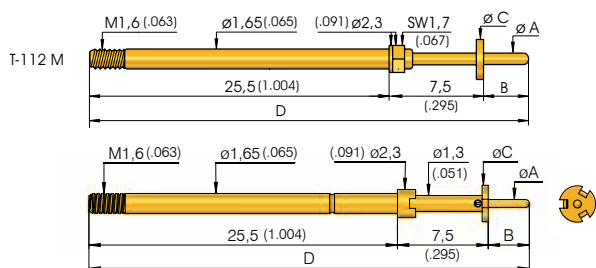

Available Tip Styles T-112 M

Material	Tip Style	Plating	Further Versions	
			Ø	Ø (inch)
3 02	Ø s. Tbl.	A		
3 05	Ø s. Tbl.	A		
3 05 G	Ø s. Tbl.	A		

Available Tip Styles T-912 M

Material	Tip Style	Plating	Further Versions	
			Ø	Ø (inch)
3 02	Ø s. Tbl.	A		
3 05	Ø s. Tbl.	A		

Mechanical Data

Working Stroke: 4,0 mm (.157)
Maximum Stroke: 5,0 mm (.197)
Spring Force at Work. Stroke: 1,5 N (5.4oz)
alternative: 0,6 N (2.1oz); 0,8 N (2.9oz);
 2,25 N (8.1oz); 3,0 N (10.8oz);
 5,0 N (18.1oz)

Materials

Plunger: BeCu, gold-plated
Barrel: Brass, gold-plated
Spring: Steel, gold-plated
 or Stainless Steel (MC on request)

Note:
 T-112 ... M / T-112 M will be screwed into KS-112 ... M (Page 132) using special tools (see page 170/171).
 Recommended Screw-in Torque:
 Min.: 3 Ncm / Max.: 5 Ncm
 * Details of Torque Tools and Insertion Bits from page 170 on.

Operating Temperature

Standard: -40° up to +80° C

Electrical Data

Current Rating: 5 - 8 A
R_i typical: < 20 mΩ




Part No.	A Tip-Ø mm (inch)	B Tip Length mm (inch)	C Disk-Ø mm (inch)	D Total Length mm (inch)	E Install. Height with KS mm (inch)	* Tool (Insertion Bits)
T-912 302 050 150 210 A 1502 M	0,5 (.020)	1,5 (.059)	2,1 (.083)	34,5 (1.358)	9,2 (.362)	BIT-T-912 M
T-112 302 065 300 100 A 1502 M	0,65 (.026)	3,0 (.118)	1,0 (.039)	36,0 (1.417)	10,7 (.421)	BIT-GKS-112 M-B
T-912 302 070 150 210 A 1502 M	0,7 (.028)	1,5 (.059)	2,1 (.083)	34,5 (1.358)	9,2 (.362)	BIT-T-912 M
T-112 302 070 200 180 A 1502 M	0,7 (.028)	2,0 (.079)	1,8 (.071)	35,0 (1.378)	9,7 (.382)	BIT-GKS-112 M-B
T-912 302 070 200 210 A 1502 M	0,7 (.028)	2,0 (.079)	2,1 (.083)	35,0 (1.378)	9,7 (.382)	BIT-T-912 M
T-112 302 080 320 180 A 1502 M	0,8 (.031)	3,2 (.126)	1,8 (.071)	36,2 (1.425)	10,9 (.429)	BIT-GKS-112 M-B
T-912 302 080 320 210 A 1502 M	0,8 (.031)	3,2 (.126)	2,1 (.083)	36,2 (1.425)	10,9 (.429)	BIT-T-912 M
T-912 302 100 170 250 A 1502 M	1,0 (.039)	1,7 (.067)	2,5 (.098)	34,7 (1.366)	9,4 (.370)	BIT-T-912 M
T-912 302 100 180 250 A 1502 M	1,0 (.039)	1,8 (.071)	2,5 (.098)	34,8 (1.370)	9,5 (.374)	BIT-T-912 M
T-912 302 100 200 210 A 1502 M	1,0 (.039)	2,0 (.079)	2,1 (.083)	35,0 (1.378)	9,7 (.382)	BIT-T-912 M
T-912 302 100 200 250 A 1502 M	1,0 (.039)	2,0 (.079)	2,5 (.098)	35,0 (1.378)	9,7 (.382)	BIT-T-912 M
T-112 302 100 250 180 A 1502 M	1,0 (.039)	2,5 (.098)	1,8 (.071)	35,5 (1.398)	10,2 (.402)	BIT-GKS-112 M-B
T-912 302 100 250 210 A 1502 M	1,0 (.039)	2,5 (.098)	2,1 (.083)	35,5 (1.398)	10,2 (.402)	BIT-T-912 M
T-112 302 100 300 180 A 1502 M	1,0 (.039)	3,0 (.118)	1,8 (.071)	36,0 (1.417)	10,7 (.421)	BIT-GKS-112 M-B
T-912 302 100 300 210 A 1502 M	1,0 (.039)	3,0 (.118)	2,1 (.083)	36,0 (1.417)	10,7 (.421)	BIT-T-912 M
T-912 302 100 300 250 A 1502 M	1,0 (.039)	3,0 (.118)	2,5 (.098)	36,0 (1.417)	10,7 (.421)	BIT-T-912 M
T-112 302 100 320 200 A 1502 M	1,0 (.039)	3,2 (.126)	2,0 (.079)	36,2 (1.425)	10,9 (.429)	BIT-GKS-112 M-B
T-112 302 100 330 230 A 1502 M	1,0 (.039)	3,3 (.130)	2,3 (.091)	36,3 (1.429)	11,0 (.433)	BIT-GKS-112 M
T-912 302 100 330 230 A 1502 M	1,0 (.039)	3,3 (.130)	2,3 (.091)	36,3 (1.429)	11,0 (.433)	BIT-T-912 M
T-112 302 100 350 250 A 1502 M	1,0 (.039)	3,5 (.138)	2,5 (.098)	36,5 (1.437)	11,2 (.441)	BIT-GKS-112 M
T-912 302 100 350 250 A 1502 M	1,0 (.039)	3,5 (.138)	2,5 (.098)	36,5 (1.437)	11,2 (.441)	BIT-T-912 M
T-112 302 102 318 245 A 1502 M	1,02 (.039)	3,18 (.126)	2,45 (.098)	36,18 (1.425)	10,88 (.429)	BIT-GKS-112 M
T-912 302 120 120 250 A 1502 M	1,2 (.047)	1,2 (.047)	2,5 (.098)	34,2 (1.347)	8,9 (.350)	BIT-T-912 M
T-112 302 120 200 190 A 1502 M	1,2 (.047)	2,0 (.079)	1,9 (.075)	35,0 (1.378)	9,7 (.382)	BIT-GKS-112 M-B
T-912 302 120 200 210 A 1502 M	1,2 (.047)	2,0 (.079)	2,1 (.083)	35,0 (1.378)	9,7 (.392)	BIT-T-912 M
T-912 302 130 210 250 A 1502 M	1,3 (.051)	2,1 (.083)	2,5 (.098)	35,1 (1.382)	9,8 (.386)	BIT-T-912 M
T-112 302 130 300 250 A 1502 M	1,3 (.051)	3,0 (.118)	2,5 (.098)	36,0 (1.417)	10,7 (.421)	BIT-GKS-112 M
T-912 302 130 300 250 A 1502 M	1,3 (.051)	3,0 (.118)	2,5 (.098)	36,0 (1.417)	10,7 (.421)	BIT-T-912 M
T-912 302 140 160 350 A 3002 M	1,4 (.055)	1,6 (.063)	3,5 (.138)	34,6 (1.362)	9,3 (.366)	BIT-T-912 M
T-912 302 150 200 350 A 1502 M	1,5 (.059)	2,0 (.079)	3,5 (.138)	35,0 (1.378)	9,7 (.382)	BIT-T-912 M
T-112 302 150 250 300 A 1502 M	1,5 (.059)	2,5 (.098)	3,0 (.118)	35,5 (1.398)	10,2 (.402)	BIT-GKS-112 M
T-912 302 150 250 350 A 1502 M	1,5 (.059)	2,5 (.098)	3,5 (.135)	35,5 (1.398)	10,2 (.402)	BIT-T-912 M

Part No.	A Tip-Ø mm (inch)	B Tip Length mm (inch)	C Disk-Ø mm (inch)	D Total Length mm (inch)	E Install. Height with KS mm (inch)	* Tool (Insertion Bit)
T-112 305 064 150 150 A 1502 M	0,64 (.024)	1,5 (.059)	1,5 (.059)	34,5 (1.358)	9,2 (.362)	BIT-GKS-112 M-B
T-112 305 064 250 150 A 1502 M	0,64 (.024)	2,5 (.098)	1,5 (.059)	35,5 (1.398)	10,2 (.402)	BIT-GKS-112 M-B
T-112 305 064 250 180 A 1502 M	0,64 (.024)	2,5 (.098)	1,8 (.071)	35,5 (1.398)	10,2 (.402)	BIT-GKS-112 M-B
T-912 305 064 250 250 A 1502 M	0,64 (.024)	2,5 (.098)	2,5 (.098)	35,5 (1.398)	10,2 (.402)	BIT-T-912 M
T-112 305 064 300 150 A 1502 M	0,64 (.024)	3,0 (.118)	1,5 (.059)	36,0 (1.417)	10,7 (.421)	BIT-GKS-112 M-B
T-112 305 064 460 180 A 1502 M	0,64 (.024)	4,6 (.181)	1,8 (.071)	37,6 (1.480)	12,3 (.484)	BIT-GKS-112 M-B
T-112 305 065 200 180 A 3002 M	0,65 (.026)	2,0 (.079)	1,8 (.071)	35,0 (1.378)	9,7 (.382)	BIT-GKS-112 M-B
T-912 305 065 200 210 A 1502 M	0,65 (.026)	2,0 (.079)	2,1 (.083)	35 (1.378)	9,7 (.382)	BIT-T-912 M
T-912 305 065 230 250 A 1502 M	0,65 (.026)	2,3 (.091)	2,5 (.098)	35,3 (1.390)	10,0 (.394)	BIT-T-912 M
T-112 305 065 250 180 A 1502 M	0,65 (.026)	2,5 (.098)	1,8 (.071)	35,5 (1.398)	10,2 (.402)	BIT-GKS-112 M-B
T-912 305 065 250 210 A 1502 M	0,65 (.026)	2,5 (.098)	2,1 (.083)	35,5 (1.398)	10,2 (.402)	BIT-T-912 M
T-112 305 065 270 150 A 1502 M	0,65 (.026)	2,7 (.106)	1,5 (.059)	35,7 (1.406)	10,4 (.409)	BIT-GKS-112 M-B
T-112 305 065 270 150 A 1502 MG	0,65 (.026)	2,7 (.106)	1,5 (.059)	35,7 (1.406)	10,4 (.409)	BIT-GKS-112 M-B
T-912 305 065 300 210 A 1502 M	0,65 (.026)	3,0 (.118)	2,1 (.083)	36,0 (1.417)	10,7 (.421)	BIT-T-912 M
T-112 305 065 340 180 A 1502 M	0,65 (.026)	3,4 (.134)	1,8 (.071)	36,4 (1.433)	11,1 (.437)	BIT-GKS-112 M-B
T-912 305 065 340 210 A 1502 M	0,65 (.026)	3,4 (.134)	2,1 (.083)	36,4 (1.433)	11,1 (.437)	BIT-T-912 M
T-112 305 065 340 300 A 1502 M	0,65 (.026)	3,4 (.134)	3,0 (.118)	36,4 (1.433)	11,1 (.437)	BIT-GKS -112 M
T-912 305 065 340 300 A 1502 M	0,65 (.026)	3,4 (.134)	3,0 (.118)	36,4 (1.433)	11,1 (.437)	BIT-T-912 M
T-112 305 065 360 180 A 1502 M	0,65 (.026)	3,6 (.142)	1,8 (.071)	36,6 (1.457)	11,3 (.445)	BIT-GKS-112 M-B
T-912 305 065 360 210 A 1502 M	0,65 (.026)	3,6 (.142)	2,1 (.083)	36,6 (1.457)	11,3 (.445)	BIT-T-912 M
T-112 305 065 430 150 A 1502 M	0,65 (.026)	4,3 (.169)	1,5 (.059)	37,3 (1.479)	12,0 (.472)	BIT-GKS-112 M-B
T-112 305 065 500 150 A 1502 M	0,65 (.026)	5,0 (.197)	1,5 (.059)	38,0 (1.496)	12,7 (.500)	BIT-GKS-112 M-B
T-912 305 080 200 250 A 1502 M	0,8 (.032)	2,0 (.079)	2,5 (.098)	35,0 (1.378)	9,7 (.382)	BIT-T-912 M
T-912 305 080 230 250 A 1502 M	0,8 (.032)	2,3 (.091)	2,5 (.098)	35,3 (1.390)	10,0 (.394)	BIT-T-912 M
T-112 305 080 280 180 A 1502 M	0,8 (.032)	2,8 (.110)	1,8 (.071)	35,8 (1.409)	10,5 (.413)	BIT-GKS-112 M-B
T-112 305 080 280 195 A 1502 M	0,8 (.032)	2,8 (.110)	1,95 (.079)	35,8 (1.409)	10,5 (.413)	BIT-GKS-112 M-B
T-912 305 080 280 210 A 1502 M	0,8 (.032)	2,8 (.110)	2,1 (.083)	35,8 (1.409)	10,5 (.413)	BIT-T-912 M
T-112 305 080 280 250 A 1502 M	0,8 (.032)	2,8 (.110)	2,5 (.098)	35,8 (1.409)	10,5 (.413)	BIT-GKS-112 M
T-912 305 080 280 250 A 1502 M	0,8 (.032)	2,8 (.110)	2,5 (.098)	35,8 (1.409)	10,5 (.413)	BIT-T-912 M
T-112 305 080 320 230 A 1502 M	0,8 (.032)	3,2 (.126)	2,3 (.091)	36,2 (1.425)	10,9 (.429)	BIT-GKS-112 M
T-912 305 080 320 230 A 1502 M	0,8 (.032)	3,2 (.126)	2,3 (.091)	36,2 (1.425)	10,9 (.429)	BIT-T-912 M
T-112 305 080 320 350 A 1502 M	0,8 (.032)	3,2 (.126)	3,5 (.138)	36,2 (1.425)	10,9 (.429)	BIT-GKS-112 M
T-912 305 080 320 350 A 1502 M	0,8 (.032)	3,2 (.126)	3,5 (.138)	36,2 (1.425)	10,9 (.429)	BIT-T-912 M
T-112 305 080 400 180 A 1502 M	0,8 (.032)	4,0 (.158)	1,8 (.071)	37,0 (1.457)	11,7 (.461)	BIT-GKS-112 M-B
T-912 305 080 400 210 A 1502 M	0,8 (.032)	4,0 (.158)	2,1 (.083)	37,0 (1.457)	11,7 (.461)	BIT-T-912 M
T-112 305 080 400 250 A 1502 M	0,8 (.032)	4,0 (.158)	2,5 (.098)	37,0 (1.457)	11,7 (.461)	BIT-GKS-112 M
T-912 305 080 400 250 A 1502 M	0,8 (.032)	4,0 (.158)	2,5 (.098)	37,0 (1.457)	11,7 (.461)	BIT-T-912 M
T-112 305 080 460 250 A 1502 M	0,8 (.032)	4,6 (.181)	2,5 (.098)	37,6 (1.480)	12,3 (.484)	BIT-GKS-112 M
T-912 305 080 460 250 A 1502 M	0,8 (.032)	4,6 (.181)	2,5 (.098)	37,6 (1.480)	12,3 (.484)	BIT-T-912 M
T-912 305 080 530 280 A 1502 M	0,8 (.032)	5,3 (.209)	2,8 (.110)	38,3 (1.508)	13,0 (.512)	BIT-T-912 M
T-112 305 100 200 180 A 1502 M	1,0 (.039)	2,0 (.079)	1,8 (.071)	35,0 (1.378)	9,7 (.382)	BIT-GKS-112 M-B
T-912 305 100 200 210 A 1502 M	1,0 (.039)	2,0 (.079)	2,1 (.083)	35,0 (1.378)	9,7 (.382)	BIT-T-912 M
T-912 305 100 250 300 A 1502 M	1,0 (.039)	2,5 (.098)	3,0 (.118)	35,5 (1.398)	10,2 (.402)	BIT-T-912 M
T-912 305 100 260 210 A 1502 M	1,0 (.039)	2,6 (.102)	2,1 (.083)	35,6 (1.402)	10,3 (.406)	BIT-T-912 M
T-912 305 100 260 230 A 1502 M	1,0 (.039)	2,6 (.102)	2,3 (.091)	35,6 (1.402)	10,3 (.406)	BIT-T-912 M
T-112 305 100 260 250 A 1502 M	1,0 (.039)	2,6 (.102)	2,5 (.098)	35,6 (1.402)	10,3 (.406)	BIT-GKS-112 M
T-912 305 100 260 250 A 1502 M	1,0 (.039)	2,6 (.102)	2,5 (.098)	35,6 (1.402)	10,3 (.406)	BIT-T-912 M
T-912 305 100 350 250 A 1502 M	1,0 (.039)	3,5 (.138)	2,5 (.098)	36,5 (1.402)	11,2 (.441)	BIT-T-912 M
T-112 305 100 420 180 A 1502 M	1,0 (.039)	4,2 (.165)	1,8 (.071)	37,2 (1.465)	11,9 (.496)	BIT-GKS-112 M-B
T-912 305 100 420 210 A 1502 M	1,0 (.039)	4,2 (.165)	2,1 (.083)	37,2 (1.465)	11,9 (.496)	BIT-T-912 M
T-112 305 100 490 180 A 1502 M	1,0 (.039)	4,9 (.193)	1,8 (.071)	37,9 (1.492)	12,6 (.496)	BIT-GKS-112 M-B
T-912 305 100 490 210 A 1502 M	1,0 (.039)	4,9 (.193)	2,1 (.083)	37,9 (1.492)	12,6 (.496)	BIT-T-912 M
T-912 305 100 600 250 A 1502 M	1,0 (.039)	6,0 (.236)	2,5 (.098)	39,0 (1.535)	13,7 (.539)	BIT-T-912 M
T-912 305 120 220 250 A 3002 M	1,2 (.047)	2,2 (.087)	2,5 (.098)	35,2 (1.386)	9,9 (.390)	BIT-T-912 M
T-912 305 120 250 250A 1502 M	1,2 (.047)	2,5 (.098)	2,5 (.098)	35,5 (1.398)	10,2 (.402)	BIT-T-912 M
T-912 305 140 160 320 A 1502 M	1,4 (.055)	1,6 (.063)	3,2 (.126)	34,6 (1.362)	9,3 (.366)	BIT-T-912 M
T-912 305 140 350 250 A 3002 M	1,4 (.055)	3,5 (.138)	2,5 (.098)	36,5 (1.437)	11,2 (.441)	BIT-T-912 M
T-912 305 140 350 280 A 3002 M	1,4 (.055)	3,5 (.138)	2,8 (.110)	36,5 (1.437)	11,2 (.441)	BIT-T-912 M
T-912 305 150 250 300 A 1502 M	1,5 (.059)	2,5 (.098)	3,0 (.118)	35,5 (1.398)	10,2 (.402)	BIT-T-912 M

Grid:
 ≥ 4,0 mm
 ≥ 160 Mil

Installation Height: 10,5 mm (.413)
Recommended Stroke: 4,0 mm (.157)

Mounting and Functional Dimensions

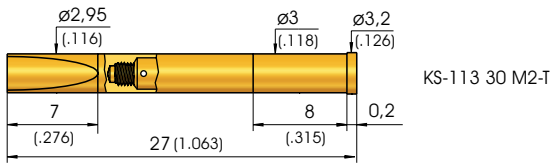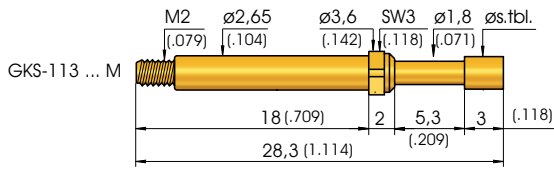

*** axially positioned trough-hole for leakage test. Attention: when not assembled correctly, then solder can flow inside the receptacle.

Collar Height and Installation Height

The Installation Height of the Tip is always 10,5 mm (.413). The Test Probe can only be used with a Receptacle.

Mechanical Data

Working Stroke: 4,0 mm (.157)
Maximum Stroke: 5,3 mm (.209)
Spring Force at Work. Stroke: 1,5 N (5.4oz)
alternative: 0,3 N (1.1oz); 0,6 N (2.2oz); 1,0 N (3.6oz); 2,25 (8.1oz); 3,0 N (10.8oz); 5,0 N (18.1oz)

Electrical Data

Current Rating: 5 - 8 A
R_i typical: ≤ 30 mΩ
 (** < 100 mΩ)

Operating Temperature

Standard: -40° up to +80° C
****with Spec. Design. „MC“:** -100° up to +200° C
 (1,5 N; 2,25 N; 3,0 N)

Materials

Plunger: Steel or BeCu, gold-, rhodium or chemically nickel-plated
Barrel: Brass, gold-plated
Spring: Steel, gold-plated or Stainless Steel** (MC)
Receptacle: Brass, gold-plated

Mounting Hole Size

for KS-113 30 M2 and KS-113 30 M2-T in CEM 1 and FR 4: ∅ 2,99 mm (.1177)
for KS-113 30 M2- R in CEM 1 and FR 4: ∅ 3,00 - 3,02 mm (.1181 - .1189)

Note:
 GKS-113 ... M will be screwed into KS-113 ... M using special tools, see Page 170/171.

Recommended Screw-in Torque:
 Min.: 10 Ncm / Max.: 20 Ncm

Available Tip Styles

Material	Tip Style	Plating	Further Versions	
			∅	∅ (inch)
2 01		R		
3 02		A	0,80 (.031) 1,00 (.039) 1,80 (.071) 3,00 (.118) 4,00 (.157)	
2 03		A		
3 03		A	4,00 R	(.157)
2 04		R	1,80 A 3,00	(.071) (.118)
3 05		A	0,80 (.031) 1,40 (.055) 3,00 R	(.118)
3 55		R		
Tip Length 4 mm (.157)				
3 06		A	1,60 (.063) 2,30 (.091) 4,00 (.157) 8,00 (.315)	
3 06		R	2,50 (.098) 3,50 (.138) 6,00 (.236)	
2 07		A		
3 07		R		
3 12		A		
3 13		R		
2 14		R		
2 15*		A		
2 17		R	1,80 (.071) 3,00 A	(.118)
3 19		A	3,00	(.118)
3 72		A		
2 87		N	4,00	(.157)
2 88		A		

* pressed-in Steel Tip in Base Plunger made of Brass

Ordering Example

Series	Tip Material	Tip Style	Tip Diameter (1/100 mm)	Plating	Spring Force (dN)	Collar Height (mm)	Special Designation alternative „MC“
	2 = Steel 3 = BeCu			A = Gold N = Nickel R = Rhodium			

Test Probe:

G K S | 1 1 3 | 3 | 0 6 | 2 3 0 | R | 1 5 | 0 2 | M

Receptacles for GKS-113 ... M:

K S - 1 1 3 3 0 M 2 - R | K S - 1 1 3 3 0 M 2 - T

Receptacles for Leakage Test***:

K S - 1 1 3 3 0 M 2

T-113 M / T-888 M

Screw-in Step Probes

NEW

Grid:



≥ 4,00 mm (dependant on max. tip-diameter)

≥ 160 Mil (dependant on max. tip-diameter)

Installation Height: see table

Recommended Stroke: 4,0 mm (.157)

Mounting and Functional Dimensions

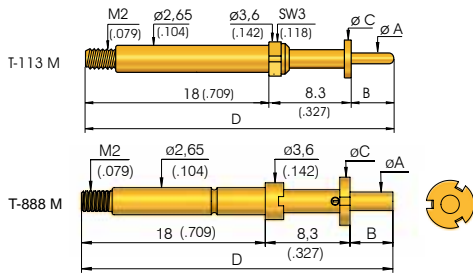

T-113 / T-888 M
with KS 113 ... M

Mechanical Data

- Working Stroke:** 4,0 mm (.158)
- Maximum Stroke:** 5,0 mm (.197)
- Spring Forces at Work. Str.:** 1,5 N (5,4oz)
- altern. T-113 M:** 0,3 N (1.1oz); 0,6 N (2.2oz); 1,0 N (3.6 oz); 2,25 N (8.1oz); 3,0 N (10.8oz); 5,0 N (18.1oz)
- altern. T-888 M:** 3,0 N (10.8oz)

Electrical Data

- Current Rating:** 5 - 8 A
- R_i typical:** < 30 mΩ

Operating Temperature

Standard: -40° up to +80° C

Materials

- Plunger:** BeCu, gold-plated
- Barrel:** Brass, gold-plated
- Spring:** Steel, gold-plated or Stainless Steel (MC on request)

Note:

T-113 ... M / T-888 M will be screwed into KS-113 ... M (Page 135) using special tools (see Page 170/171).
Recommended Screw-in Torque:
Min.: 10 Ncm / Max.: 20 Ncm
*** Details of Torque Tools and Insertion Bits from page 170 on.

Available Tip Style T-113 M

Material	Tip Style	Plating	Further Versions	
			∅	∅ (inch)
3 02	∅ s. Tbl.	A		
3 05	∅ s. Tbl.	A		

Available Tip Style T-888 M

Material	Tip Style	Plating	Further Versions	
			∅	∅ (inch)
3 02*	∅ s. Tbl.	A		
3 02	∅ s. Tbl.	A		
3 05**	∅ s. Tbl.	A		

* ∅ A ≤ 2,5 mm

** ∅ A ≥ 3,5 mm (screw-in only with Tool BIT-T-912 M)

Part No.	A Tip-∅ mm (inch)	B Tip Length mm (inch)	C Disk-∅ mm (inch)	D Total Length mm (inch)	E Install. Height with KS mm (inch)	*** Tool (Insertion Bit)
T-113 302 100 300 350 A 1502 M	1,0 (.039)	3,0 (.118)	3,5 (.138)	29,3 (1.154)	11,5 (.453)	BIT-GKS-113 M
T-888 302 100 300 350 A 1502 M	1,0 (.039)	3,0 (.118)	3,5 (.138)	29,3 (1.154)	11,5 (.453)	BIT-T-888 M-3
T-113 302 130 270 470 A 1502 M	1,3 (.051)	2,7 (.106)	4,7 (.185)	29,0 (1.142)	11,2 (.441)	BIT-T-113 M
T-888 302 130 270 470 A 1502 M	1,3 (.051)	2,7 (.106)	4,7 (.185)	29,0 (1.142)	11,2 (.441)	BIT-T-888 M
T-888 302 130 300 470 A 1502 M	1,3 (.051)	3,0 (.118)	4,7 (.185)	29,3 (1.154)	11,5 (.453)	BIT-T-888 M
T-113 302 130 360 470 A 1502 M	1,3 (.051)	3,6 (.142)	4,7 (.185)	29,9 (1.177)	12,1 (.476)	BIT-T-113 M
T-888 302 130 360 470 A 1502 M	1,3 (.051)	3,6 (.142)	4,7 (.185)	29,9 (1.177)	12,1 (.476)	BIT-T-888 M
T-113 302 130 530 470 A 1502 M	1,3 (.051)	5,3 (.209)	4,7 (.185)	31,6 (1.244)	13,8 (.543)	BIT-T-113 M
T-888 302 130 530 470 A 1502 M	1,3 (.051)	5,3 (.209)	4,7 (.185)	31,5 (1.240)	13,7 (.539)	BIT-T-888 M
T-113 302 130 580 470 A 1502 M	1,3 (.051)	5,8 (.228)	4,7 (.185)	32,1 (1.264)	14,3 (.563)	BIT-T-113 M
T-888 302 130 580 470 A 1502 M	1,3 (.051)	5,8 (.228)	4,7 (.185)	32,0 (1.260)	14,2 (.559)	BIT-T-888 M
T-113 302 140 100 350 A 1502 M	1,4 (.055)	1,0 (.039)	3,5 (.138)	27,3 (1.074)	9,5 (.374)	BIT-GKS-113 M
T-888 302 140 100 350 A 1502 M	1,4 (.055)	1,0 (.039)	3,5 (.138)	27,3 (1.074)	9,5 (.374)	BIT-T-888 M
T-113 302 140 170 350 A 1502 M	1,4 (.055)	1,7 (.067)	3,5 (.138)	28,0 (1.102)	10,2 (.402)	BIT-GKS-113 M
T-888 302 140 170 350 A 1502 M	1,4 (.055)	1,7 (.067)	3,5 (.138)	28,0 (1.102)	10,2 (.402)	BIT-T-888 M
T-113 302 140 200 350 A 1502 M	1,4 (.055)	2,0 (.079)	3,5 (.138)	28,3 (1.114)	10,5 (.413)	BIT-GKS-113 M
T-888 302 140 200 350 A 1502 M	1,4 (.055)	2,0 (.079)	3,5 (.138)	28,3 (1.114)	10,5 (.413)	BIT-T-888 M-3
T-113 302 140 240 350 A 1502 M	1,4 (.055)	2,4 (.095)	3,5 (.138)	28,7 (1.130)	10,9 (.429)	BIT-GKS-113 M
T-888 302 140 240 350 A 1502 M	1,4 (.055)	2,4 (.095)	3,5 (.138)	28,7 (1.130)	10,9 (.429)	BIT-T-888 M
T-113 302 140 300 350 A 1502 M	1,4 (.055)	3,0 (.118)	3,5 (.138)	29,3 (1.154)	11,5 (.453)	BIT-GKS-113 M
T-888 302 140 300 350 A 1502 M	1,4 (.055)	3,0 (.118)	3,5 (.138)	29,3 (1.154)	11,5 (.453)	BIT-T-888 M
T-113 302 140 320 250 A 1502 M	1,4 (.055)	3,2 (.126)	2,5 (.098)	29,5 (1.161)	11,7 (.461)	BIT-GKS-113 M-B
T-113 302 170 220 300 A 1502 M	1,7 (.067)	2,2 (.087)	3,0 (.118)	28,5 (1.122)	10,7 (.421)	BIT-GKS-113 M-B
T-113 302 170 220 350 A 1502 M	1,7 (.067)	2,2 (.087)	3,5 (.138)	28,5 (1.122)	10,7 (.421)	BIT-GKS-113 M
T-888 302 170 220 350 A 1502 M	1,7 (.067)	2,2 (.087)	3,5 (.138)	28,5 (1.122)	10,7 (.421)	BIT-T-888 M
T-888 302 180 140 450 A 1502 M	1,8 (.071)	1,4 (.055)	4,5 (.177)	27,7 (1.091)	9,9 (.390)	BIT-T-888 M
T-113 302 180 150 450 A 1502 M	1,8 (.071)	1,5 (.059)	4,5 (.177)	27,8 (1.095)	10,0 (.394)	BIT-T-113 M
T-888 302 180 150 450 A 1502 M	1,8 (.071)	1,5 (.059)	4,5 (.177)	27,8 (1.095)	10,0 (.394)	BIT-T-888 M
T-113 302 180 160 350 A 1502 M	1,8 (.071)	1,6 (.063)	3,5 (.138)	27,9 (1.098)	10,1 (.398)	BIT-GKS-113 M
T-888 302 180 160 350 A 1502 M	1,8 (.071)	1,6 (.063)	3,5 (.138)	27,9 (1.098)	10,1 (.398)	BIT-T-888 M-3
T-888 302 180 200 470 A 1502 M	1,8 (.071)	2,0 (.079)	4,7 (.185)	28,3 (1.114)	10,5 (.413)	BIT-T-888 M
T-888 302 180 220 350 A 1502 M	1,8 (.071)	2,2 (.087)	3,5 (.138)	28,5 (1.122)	10,7 (.421)	BIT-T-888 M-3

Part No.	A Tip-Ø mm (inch)	B Tip Length mm (inch)	C Disk-Ø mm (inch)	D Total Length mm (inch)	E Install. Height with KS mm (inch)	*** Tool (Insertion Bit)
T-888 302 180 420 470 A 1502 M	1,8 (.071)	4,2 (.165)	4,7 (.185)	30,5 (1.201)	12,7 (.500)	BIT-T-888 M
T-888 302 180 500 470 A 1502 M	1,8 (.071)	5,0 (.197)	4,7 (.185)	31,3 (1.232)	13,5 (.532)	BIT-T-888 M
T-113 302 180 580 470 A 1502 M	1,8 (.071)	5,8 (.228)	4,7 (.185)	32,1 (1.264)	14,3 (.563)	BIT-T-113 M
T-888 302 180 580 470 A 1502 M	1,8 (.071)	5,8 (.228)	4,7 (.185)	32,1 (1.264)	14,3 (.563)	BIT-T-888 M
T-888 302 220 180 350 A 1502 M	2,2 (.087)	1,8 (.071)	3,5 (.138)	28,1 (1.106)	10,3 (.406)	BIT-T-888 M-3
T-888 302 220 200 350 A 1502 M	2,2 (.087)	2,0 (.079)	3,5 (.138)	28,3 (1.114)	10,5 (.413)	BIT-T-888 M-3
T-113 302 230 180 350 A 1502 M	2,3 (.091)	1,8 (.071)	3,5 (.138)	28,1 (1.106)	10,3 (.406)	BIT-GKS-113 M
T-113 302 230 200 350 A 1502 M	2,3 (.091)	2,0 (.079)	3,5 (.138)	28,3 (1.114)	10,5 (.413)	BIT-GKS-113 M
T-888 302 250 120 470 A 1502 M	2,5 (.098)	1,2 (.048)	4,7 (.185)	27,5 (1.083)	9,7 (.382)	BIT-T-888 M
T-888 302 250 200 470 A 1502 M	2,5 (.098)	2,0 (.079)	4,7 (.185)	28,3 (1.114)	10,5 (.413)	BIT-T-888 M
T-888 302 250 220 470 A 1502 M	2,5 (.098)	2,2 (.087)	4,7 (.185)	28,5 (1.122)	10,7 (.421)	BIT-T-888 M
T-888 302 250 300 470 A 1502 M	2,5 (.098)	3,0 (.118)	4,7 (.185)	29,3 (1.154)	11,5 (.453)	BIT-T-888 M
T-888 302 370 350 500 A 1502 M	3,7 (.146)	3,5 (.138)	5,0 (.197)	29,8 (1.173)	12,0 (.472)	BIT-T-912 M
T-888 302 370 550 500 A 1502 M	3,7 (.146)	5,5 (.217)	5,0 (.197)	31,8 (1.252)	14,0 (.551)	BIT-T-912 M
T-888 302 400 100 500 A 1502 M	4,0 (.158)	1,0 (.039)	5,0 (.197)	27,3 (1.075)	9,5 (.374)	BIT-T-912 M
T-888 302 400 130 500 A 1502 M	4,0 (.158)	1,3 (.051)	5,0 (.197)	27,6 (1.087)	9,8 (.386)	BIT-T-912 M
T-888 302 400 170 500 A 1502 M	4,0 (.158)	1,7 (.067)	5,0 (.197)	28,0 (1.102)	10,2 (.402)	BIT-T-912 M
T-113 302 400 200 500 A 1502 M	4,0 (.158)	2,0 (.079)	5,0 (.197)	28,3 (1.114)	10,5 (.413)	BIT-T-113 M
T-888 302 400 200 500 A 1502 M	4,0 (.158)	2,0 (.079)	5,0 (.197)	28,3 (1.114)	10,5 (.413)	BIT-T-912 M
T-113 305 080 150 300 A 1502 M	0,8 (.032)	1,5 (.059)	3,0 (.118)	27,8 (1.095)	10,0 (.394)	BIT-GKS-113 M-B
T-888 305 080 150 300 A 1502 M	0,8 (.032)	1,5 (.059)	3,0 (.118)	27,8 (1.095)	10,0 (.394)	BIT-T-888 M-3
T-113 305 080 250 300 A 1502 M	0,8 (.032)	2,5 (.098)	3,0 (.118)	28,8 (1.134)	11,0 (.433)	BIT-GKS-113 M-B
T-888 305 080 250 300 A 1502 M	0,8 (.032)	2,5 (.098)	3,0 (.118)	28,8 (1.134)	11,0 (.433)	BIT-T-888 M-3
T-113 305 080 280 300 A 1502 M	0,8 (.032)	2,8 (.110)	3,0 (.118)	29,1 (1.146)	11,3 (.445)	BIT-GKS-113 M-B
T-888 305 080 280 300 A 1502 M	0,8 (.032)	2,8 (.110)	3,0 (.118)	29,1 (1.146)	11,3 (.445)	BIT-T-888 M-3
T-113 305 080 300 300 A 1502 M	0,8 (.032)	3,0 (.118)	3,0 (.118)	29,3 (1.154)	11,5 (.445)	BIT-GKS-113 M-B
T-888 305 080 300 300 A 1502 M	0,8 (.032)	3,0 (.118)	3,0 (.118)	29,3 (1.154)	11,5 (.445)	BIT-T-888 M-3
T-113 305 100 280 350 A 1502 M	1,0 (.039)	2,8 (.110)	3,5 (.138)	29,1 (1.146)	11,3 (.445)	BIT-GKS-113 M
T-888 305 100 280 350 A 1502 M	1,0 (.039)	2,8 (.110)	3,5 (.138)	29,1 (1.146)	11,3 (.445)	BIT-T-888 M-3
T-113 305 100 400 350 A 1502 M	1,0 (.039)	4,0 (.158)	3,5 (.138)	30,3 (1.193)	12,5 (.492)	BIT-GKS-113 M
T-888 305 100 400 350 A 1502 M	1,0 (.039)	4,0 (.158)	3,5 (.138)	30,3 (1.193)	12,5 (.492)	BIT-T-888 M-3
T-113 305 140 100 350 A 1502 M	1,4 (.055)	1,0 (.039)	3,5 (.138)	27,3 (1.075)	9,5 (.374)	BIT-GKS-113 M
T-888 305 140 100 350 A 1502 M	1,4 (.055)	1,0 (.039)	3,5 (.138)	27,3 (1.075)	9,5 (.374)	BIT-T-888 M-3
T-113 305 140 170 320 A 1502 M	1,4 (.055)	1,7 (.067)	3,2 (.126)	28,0 (1.102)	10,2 (.402)	BIT-GKS-113 M
T-888 305 140 170 320 A 1502 M	1,4 (.055)	1,7 (.067)	3,2 (.126)	28,0 (1.102)	10,2 (.402)	BIT-T-888 M-3
T-888 305 140 200 350 A 1502 M	1,4 (.055)	2,0 (.079)	3,5 (.138)	28,3 (1.114)	10,5 (.413)	BIT-T-888 M-3
T-113 305 140 240 350 A 1502 M	1,4 (.055)	2,4 (.095)	3,5 (.138)	28,7 (1.130)	10,9 (.429)	BIT-GKS-113 M
T-888 305 140 240 350 A 1502 M	1,4 (.055)	2,4 (.095)	3,5 (.138)	28,7 (1.130)	10,9 (.429)	BIT-T-888 M-3
T-888 305 140 270 350 A 1502 M	1,4 (.055)	2,7 (.106)	3,5 (.138)	29,0 (1.142)	11,2 (.441)	BIT-T-888 M-3
T-113 305 140 320 350 A 1502 M	1,4 (.055)	3,2 (.126)	3,5 (.138)	29,5 (1.161)	10,7 (.421)	BIT-GKS-113 M
T-888 305 140 320 350 A 1502 M	1,4 (.055)	3,2 (.126)	3,5 (.138)	29,5 (1.161)	11,7 (.461)	BIT-T-888 M-3
T-113 305 140 330 350 A 1502 M	1,4 (.055)	3,3 (.130)	3,5 (.138)	29,6 (1.165)	11,8 (.465)	BIT-GKS-113 M
T-888 305 140 330 350 A 1502 M	1,4 (.055)	3,3 (.130)	3,5 (.138)	29,6 (1.165)	11,8 (.465)	BIT-T-888 M-3
T-113 305 140 400 350 A 1502 M	1,4 (.055)	4,0 (.158)	3,5 (.138)	30,3 (1.193)	12,5 (.492)	BIT-GKS-113 M
T-888 305 140 400 350 A 1502 M	1,4 (.055)	4,0 (.158)	3,5 (.138)	30,3 (1.193)	12,5 (.492)	BIT-T-888 M-3
T-113 305 150 400 350 A 1502 M	1,5 (.059)	4,0 (.158)	3,5 (.138)	30,3 (1.193)	12,5 (.492)	BIT-GKS-113 M
T-888 305 150 400 350 A 1502 M	1,5 (.059)	4,0 (.158)	3,5 (.138)	30,3 (1.193)	12,5 (.492)	BIT-T-888 M-3
T-113 305 170 220 330 A 1502 M	1,7 (.067)	2,2 (.087)	3,3 (.130)	28,5 (1.120)	10,7 (.421)	BIT-GKS-113 M
T-888 305 170 220 330 A 1502 M	1,7 (.067)	2,2 (.087)	3,3 (.130)	28,5 (1.120)	10,7 (.421)	BIT-T-888 M-3
T-113 305 180 140 400 A 1502 M	1,8 (.071)	1,4 (.055)	4,0 (.158)	27,7 (1.091)	9,9 (.390)	BIT-GKS-113 M
T-888 305 180 140 400 A 1502 M	1,8 (.071)	1,4 (.055)	4,0 (.158)	27,7 (1.091)	9,9 (.390)	BIT-T-888 M-3
T-113 305 180 300 400 A 1502 M	1,8 (.071)	3,0 (.118)	4,0 (.158)	29,3 (1.154)	11,5 (.453)	BIT-GKS-113 M
T-888 305 180 300 400 A 1502 M	1,8 (.071)	3,0 (.118)	4,0 (.158)	29,3 (1.154)	11,5 (.453)	BIT-T-888 M-3

GKS 854 / 854 M

Screw-in Test Probe

Grid:

≥ 5,08 mm


≥ 200 Mil

Installation Height: 10,8 mm (.425)


Recommended Stroke: 4,4 mm (.173)

Mounting and Functional Dimensions

GKS-854 ... M

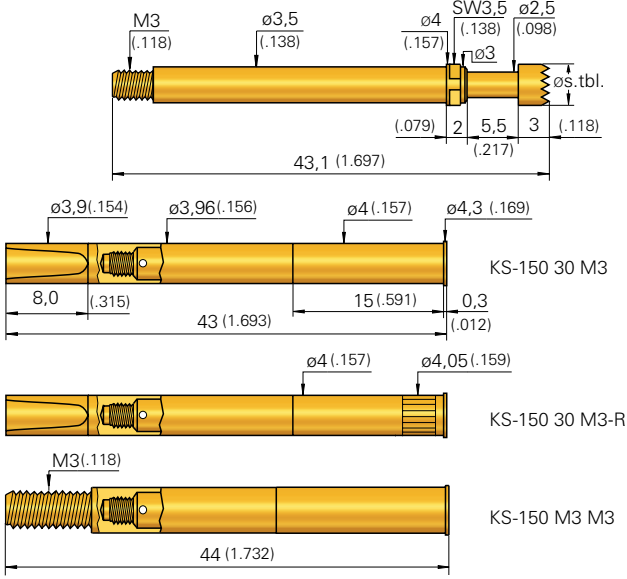

GKS-854

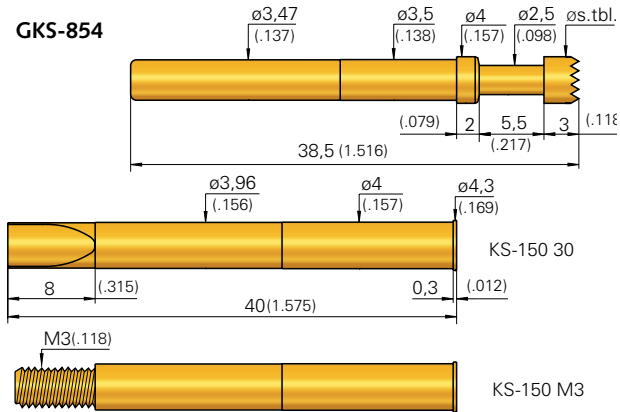

Mechanical Data

Working Stroke: 4,4 mm (.173)
Maximum Stroke: 5,5 mm (.217)
Spring Forces at Work. Str.: 3,0 N (10.8oz)
alternative: 5,0 N (18.1oz)

Electrical Data

Current Rating: 10 - 12 A
R_i typical: < 20 mΩ
 (** < 100 mΩ)

Operating Temperature

Standard: -40° up to +80° C
****with Spec. Design. „C“:** -100° up to +200° C (1,5; 5,0 N)

Materials

Plunger: BeCu, gold-plated
Barrel: Brass, gold-plated
Spring: Steel, gold-plated or Stainless Steel ** (C)
Receptacle: Brass, gold-plated

Mounting Hole Size

for KS-150 30 M3 and KS-150 M3 M3 in CEM 1 and FR 4: ø 3,99 mm (.1571)
for KS-150 30 M3-R in CEM 1 and FR 4: ø 4,00 - 4,02 mm (.1575 - .1583)
for KS-150 30 and KS-150 M3 in CEM 1 and FR 4: ø 3,98 - 3,99 mm (.1567 - .1571)


Available Tip Styles

Material	Tip Style	Plating	Further Versions	
			ø	ø (inch)
3 19		A	ø 4,00 (.157)	
3 06		A	ø 4,00 (.157)	

Collar Height and Installation Height

The Installation Height of the Tip (measured with the Receptacle) is determined by the Collar Height. The Test Probe can only be used with a Receptacle.

Collar Height	Installation Height (with Receptacle)
02	10,8 mm

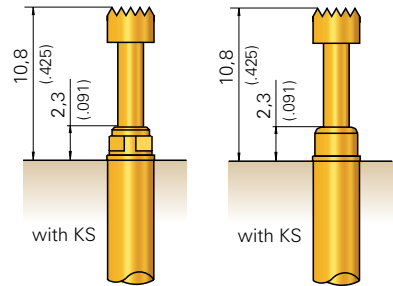

Note:

GKS-854 will be screwed into KS-150 ... M using special tools (see Page 170/171).

Recommended Screw-in Torque:
 Min.: 10 Ncm / Max.: 20 Ncm

Ordering Example

Series	Tip Material	Tip Style	Tip Diameter (1/100 mm)	Plating	Spring Force (dN)	Collar Height (mm)	Special Designation „C“, „M“, „MC“
	3 = BeCu			A = Gold			

Test Probe:

G K S 8 5 4 3 1 9 4 0 0 A 3 0 0 2

Receptacles for GKS-854 ... M:

K S - 1 5 0 3 0 M 3 K S - 1 5 0 3 0 M 3 - R K S - 1 5 0 M 3 M 3


Receptacles for GKS-854:

K S - 1 5 0 3 0 K S - 1 5 0 M 3


Grid:
 ≥ 4,50 mm
 ≥ 177 Mil

Installation Height: 13,0 mm (.512)
Recommended Stroke: 5,6 mm (.220)

Mounting and Functional Dimensions

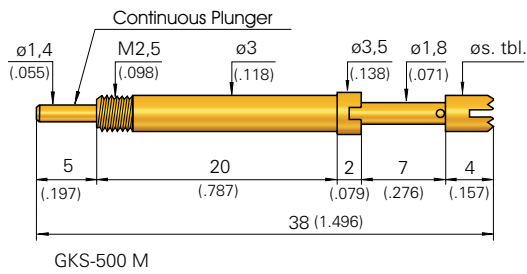

GKS-500 M



KS-500 M2,5

Available Tip Styles

Material	Tip Style	Plating	Further Versions	
			∅	∅ (inch)
3	06	A	∅ 3,00 (.118)	
3	06	A	∅ 4,00 (.157)	

Collar Height and Installation Height

The Installation Height of the Tip is always 13,0 mm (.512). The Test Probe can only be used with a Receptacle.

Collar Height	Installation Height
02	13,0 mm (.512)

Mechanical Data

Working Stroke: 5,6 mm (.220)
Maximum Stroke: 7,0 mm (.276)
Spring Force at Work. Stroke: 1,5 N (5.4oz)
alternative: 3,0 N (10.8oz); 5,0 N (18.1oz)

Materials

Plunger: BeCu, gold-plated
Barrel: Brass, gold-plated
Spring: Steel, gold-plated
Receptacle: Brass, gold-plated

Electrical Data

Current Rating
Connection to Plunger: 12 - 15 A
Connection to KS: 5 - 8 A
R_i typical:
Connection to Plunger: < 10 mΩ
Connection to KS: < 30 mΩ

Mounting Hole Size

in CEM 1 and FR 4: ∅ 3,49 mm (.1374)

Note:

GKS-500 M are screwed into KS-500 M 2,5 using special tools (see page 170/171)

Recommended Screw-in Torque:
 Min.: 10 Ncm / Max.: 20 Ncm

Ordering Example

	Series	Tip Material 3 = BeCu	Tip Style	Tip Diameter (1/100 mm)	Plating A = Gold	Spring Force (dN)	Collar Height (mm)	Type
Test Probe:	GKS	500	3	06	300	A	15	02 M
Receptacle:	KS-500	M2,5						

GKS 212 M

Screw-in Test Probe

Grid:


≥ 2,54 mm

≥ 100 Mil

Installation Height: 25,0 mm (.984)

Recommended Stroke: 12,0 mm (.472)

Mounting and Functional Dimensions

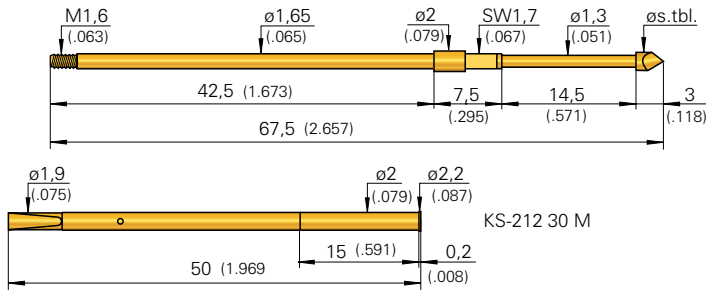

Available Tip Styles

Material	Tip Style	Plating	Further Versions	
			∅	∅ (inch)
3	06	A	∅ 2,00 (.079)	
3	07	A	∅ 2,00 (.079)	1,50 (.059)

Collar Height and Installation Height

The Installation Height of the Tip (measured with the Receptacle) is determined by the Collar Height. The Test Probe can only be used with a Receptacle.

Collar Height	Installation Height
07	25 mm (.984)

Mechanical Data

Working Stroke: 12 mm (.472)
Maximum Stroke: 14,5 mm (.571)
Spring Force at Work. Stroke: 3 N (10.8oz)

Materials

Plunger: BeCu, gold-plated
Barrel: Brass, gold-plated
Spring: Steel, gold-plated
Receptacle: Brass, gold-plated

Note:

GKS-212 ... M will be screwed into KS-212 30 M using special tools (see Page 170/171).

Electrical Data

Current Rating: 2 - 3 A
R_i typical: < 20 mΩ

Mounting Hole Size

in CEM 1 and FR 4: ∅ 1,99 mm (.0783)

Recommended Screw-in Torque:
 Min.: 3 Ncm / Max.: 5 Ncm

Ordering Example

Series	Tip Material 3 = BeCu	Tip Style	Tip Diameter (1/100 mm)	Plating A = Gold	Spring Force (dN)	Collar Height (mm)	Special Designation
--------	--------------------------	-----------	----------------------------	---------------------	----------------------	-----------------------	---------------------

Test Probe:

G K S 2 1 2 3 0 7 2 0 0 A 3 0 0 7 M




Receptacle:

K S - 2 1 2 3 0 M

Grid:
 ≥ 4,50 mm
 ≥ 177 Mil

Installation Height: 19,5 / 25,0 mm (.768 / .984)
Recommended Stroke: 12,0 mm (.472)

Mounting and Functional Dimensions

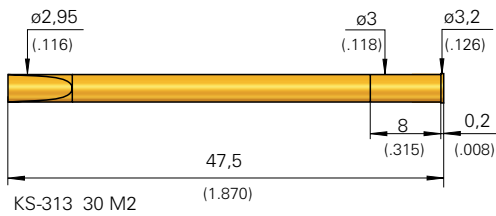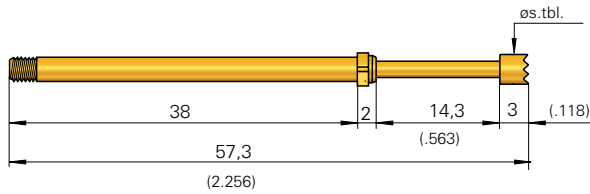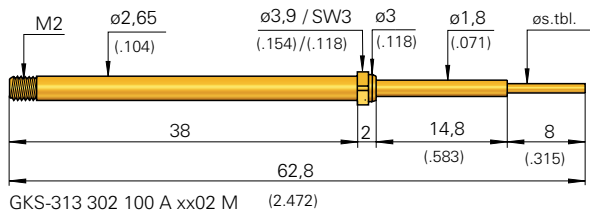

Available Tip Styles

Material	Tip Style	Plating	Further Versions	
			∅	∅ (inch)
3 02		A		
3 06		A		
3 17		R		

Collar Height and Installation Height

The Installation Height of the Tip (measured with the Receptacle) is determined by the Collar Height. The Test Probe can only be used with a Receptacle.

Collar Height	Tip Style	Install. Height
02	02	25,0 mm (.984)
02	06 / 17	19,5 mm (.768)

Mechanical Data

Working Stroke: 12 mm (.472)
Maximum Stroke: 14,3 mm (.563)
Spring Forces at Work. Stroke: 1,5 N (5.4oz)
alternative: 3,0 N (10.8oz)

Materials

Plunger: BeCu, gold- or rhodium-plated
Barrel: Brass, gold-plated
Spring: Steel, gold-plated
Receptacle: Brass, gold-plated

Note:

GKS-313 ... M will be screwed into KS-313 ... M2 using special tools (see Page 170/171).

Recommended Screw-in Torque:
 Min.: 10 Ncm / Max.: 20 Ncm

Electrical Data

Current Rating: 3 - 5 A
R_i typical: ≤ 30 mΩ

Mounting Hole Size

in CEM 1 and FR 4: ∅ 2,99 mm (.1177)

Ordering Example

Series	Tip Material 3 = BeCu	Tip Style	Tip Diameter (1/100 mm)	Plating A = Gold	Spring Force (dN)	Collar Height (mm)	Special Designation
--------	--------------------------	-----------	----------------------------	---------------------	----------------------	-----------------------	---------------------

Test Probe:

G K S 3 1 3 3 0 2 1 0 0 A 3 0 0 2 M

Receptacle:

K S - 3 1 3 3 0 M 2

GKS 913 M

Short-stroke Screw-in Test Probe

Grid:


≥ 4,00 mm

≥ 160 Mil


Installation Height: 7,2 / 8,7 mm (.283 / .343)

Recommended Stroke: 2,8 mm (.110)


Mounting and Functional Dimensions

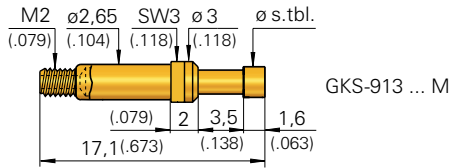

GKS-913 ... M



KS-913 35 M



KS-913 35 M-R

Available Tip Styles

Material	Tip Style	Plating	Further Versions	
			∅	∅ (inch)
1 02		A	3,50	(.138)
3 03		A		
3 05		A		
3 06*		A		
3 06		A	3,50 R 2,30 R	(.138) (.091)
3 08		R		
3 58**		R		

Tip Length 3,4 mm (.134)

Collar Height and Installation Height

The Installation Height of the Tip is determined by the Collar Height.

Collar Height	Tip Style	Install. Height (without KS)	max. Stroke
02	02/05/06/08	7,2 mm (.283)	3,5 mm (.138)
02	06 180*	7,2 mm (.283)	3,2 mm (.126)
02	58**	8,7 mm (.343)	3,3 mm (.130)

Mechanical Data

Working Stroke: 2,8 mm (.110)

Maximum Stroke: see Table

Spring Force at Work. Stroke: 1,5 N (5.4oz)

alternative: 0,8 N (2.9oz); 2,5 N (9.0oz)

Electrical Data

Current Rating: 5 - 8 A

R_i typical: < 20 mΩ (***) < 100 mΩ)

*** Spring force < 1,5 N are not recommended for high-current applications

Operating Temperature

Standard: -40° up to +80° C

*** with Spec. Design. "C": -100° up to +200° C (1,5 N)

Materials

Plunger: Brass or BeCu,

gold- or rhodium-plated

Barrel: Brass, gold-plated

Steel, gold-plated

or Stainless Steel*** (C)

Receptacle: Brass, gold-plated

Mounting Hole Size

in CEM 1 and FR 4:

with KS-913 35 M:

∅ 2,98 - 2,99 mm
(.1173 - .1177)

for KS-913 35 M- R

in CEM 1 and FR 4:

∅ 3,00 - 3,02 mm
(.1181 - .1189)

Note:

The Receptacle KS-913 35 M (-R) can only be combined with the Probe Type „GKS-913 ... M“

For applications up to 24 A:
see HSS-520 on Page 106

Note:

GKS-913 ... M will be screwed into KS-913 35 M (-R) using special tools (see Page 170/171).

Recommended Screw-in Torque:
Min.: 5 Ncm / Max.: 10 Ncm

Ordering Example

Series	Tip Material	Tip Style	Tip Diameter (1/100 mm)	Plating	Spring Force (dN)	Collar Height (mm)	Typ M, MC
	1 = Brass 3 = BeCu			A = Gold R = Rhodium			

Test Probe:

G K S 9 1 3 3 0 8 2 3 0 R 1 5 0 2 M

Receptacle:

K S - 9 1 3 3 5 M K S - 9 1 3 3 5 M - R

Screw-in High-current Probes

In the case of Screw-in High-current Probes the Plunger is also split in two sections, so that during the stroke action the two sections are deflected apart in the radial direction and subsequently the cross-section of the signal transfer zone is enlarged. With this, higher currents can be transferred.

By means of the thread the High-current Probe is secured in the Receptacle. Especially in the case of assembly upside down or by a higher cycle rate, the Screw-in Test Probes offer a high level of reliability.



HSS...M

Screw-in High-current Probes

HSS-118 M	144
HSS-120 M	145
HSS-150 M	146
HSS-552 M	146

HSS-520 M	106
HSS-827 M	129

Insertable Test Probes HSS from page 103 on.

HSS 118 M

Screw-in High-Current Test Probe

Grid:





≥ 2,54 mm

≥ 100 Mil


Installation Height: 10,5 mm (.413)

Recommended Stroke: 4,0 / 6,4 mm (.157 / .252)

Mounting and Functional Dimensions

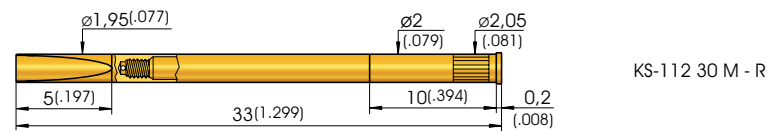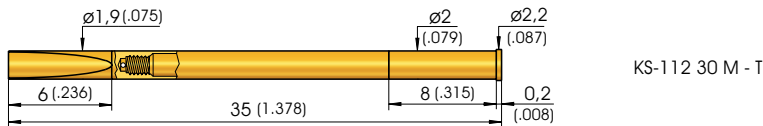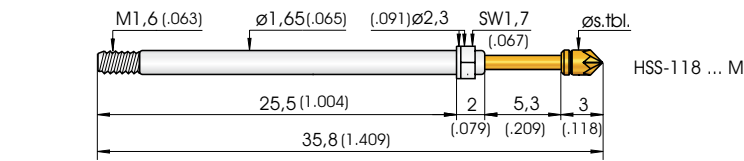

**** axially positioned trough-hole for leakage test. Attention: when not assembled correctly, then solder can flow inside the receptacle.



Collar Height and Installation Height

The Installation Height of the Tip is always 10,5 mm (.413). Test Probe can only be used with Receptacle.

Mechanical Data

Working Stroke: 4,0 mm (.157)

Maximum Stroke: 5,3 mm (.209)

For Tip Diameter < 1,0 mm:

Maximum Stroke: 8,0 mm (.315)

Spring Force at Work. Stroke: 1,5 N (5.4oz)

alternative: 0,8 N (2.9oz)*; 2,25 N (8.1oz)

Electrical Data

Current Rating: max. 16 A, with Spring Force ≥ 1,5 N, and Plunger made of BeCu

R_i typical: ≤ 10 mΩ

* Spring force < 1,5 N are not recommended for high-current applications

Materials

Plunger: Steel or BeCu, gold-plated

Barrel: Brass, silver-plated

Spring: Stainless Steel

Receptacle: Brass, gold-plated

Mounting Hole Size

for KS-112 xx M in CEM 1 and FR 4: ø 1,99 mm (.0783)

for KS-112 xx M - R in CEM 1 and FR 4: ø 2,00 - 2,02 mm (.0787 - .0795)

Operating Temperature

Standard: -100° - +200°C

Available Tip Styles

Material	Tip Style	Plating	Further Versions	
			ø	ø (inch)
3 02		A		
3 03		A		
3 05		A	0,65	(.026)
3 05		A		
3 05**		S		
3 06		A	1,30 1,60 1,80 2,50 3,50	(.051) (.063) (.070) (.098) (.138)
2 14		A		
3 17		A	2,00	(.079)
3 19		A		
3 53***		S		

** pressed-in Silver stud

*** pressed-in Silver stud

Tip Length 3,5 mm (.138),

Installation Height plus 0,5 mm (.020)

NEW

Ordering Example

Series	Tip Material 2 = Steel 3 = BeCu	Tip Style	Tip Diameter (1/100 mm)	Plating A = Gold S = Silver	Spring Force (dN)	Collar Height (mm)	Special Designation „M“
--------	---------------------------------------	-----------	----------------------------	-----------------------------------	----------------------	-----------------------	----------------------------

Test Probe:

H S S 1 1 8 3 1 7 1 7 5 A 1 5 0 2 M

Recaptacle for HSS-118 ... M:

K S - 1 1 2 3 0 M / M-R / M-T K S - 1 1 2 4 6 M


Recaptacle for Leakage Test ****:

K S - 1 1 2 3 0 M

Grid:
 ≥ 4,00 mm
 ≥ 160 Mil

Installation Height: 10,5 mm (.413)
Recommended Stroke: 4,0 mm (.157)

Mounting and Functional Dimensions

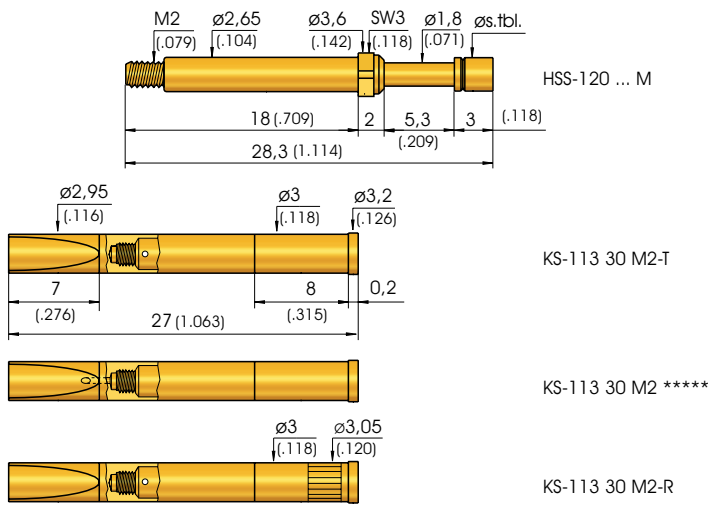


**** axially positioned through-hole for leakage test. Attention: when not assembled correctly, then solder can flow inside the receptacle.

Collar Height and Installation Height

The Installation Height of the Tip (Dimension with Receptacle) is determined by the Collar Height. Test Probes can only be used with Receptacle.

Collar Height	Installations Height with Receptacle
02 M	10,5 mm (.413)



Mechanical Data

Working Stroke: 4,0 mm (.157)
Maximum Stroke: 5,3 mm (.209)
Spring Force at Work. Stroke: 1,5 N (5.4oz)
alternative: 0,3 N* (1.1oz); 0,6 N* (2.2oz); 1,0 N* (3.6oz); 2,25 N (8.1oz); 3,0 N (10.8oz)

Electrical Data

Current Rating: max. 24 A, with Spring Force ≥ 1,5 N and Plunger made of BeCu

* Spring force < 1,5 N are not recommended for high-current applications

R_i typical: ≤ 10 mΩ

Materials

Plunger: Steel or BeCu, gold-plated,
Barrel: Brass, gold-plated
Spring: Steel, gold-plated or Stainless Steel
Receptacle: Brass, gold-plated

Mounting Hole Size

for KS-113 30 M2
in CEM 1 and FR 4: Ø 2,99 mm (.1177)
for KS-113 30 M2 - R
in CEM 1 and FR 4: Ø 3,00 - 3,02 mm (.1181 - .1189)

Operating Temperature

Standard: -100° - +200° C

Available Tip Styles

Material	Tip Style	Plating	Further Versions	
			Ø	Ø (inch)
3 02		A	4,00	(.157)
3 03		A		
3 05		A		
3 05		A	3,00	(.118)
3 05		S		
3 06		A	3,00 4,00	(.118) (.157)
3 17		A		
3 19		A		
2 51		A		
3 53		S		
3 55		A		

** Tip Length 5 mm (.197) - Installation Height with Collar Height 02: 12,5 mm (.492)

*** pressed-in Silver stud

**** pressed-in Silver stud, Tip Length 3,5 mm (.138) Installation Height plus 0,5 mm (.020)

Applications:

- High-current transfer during Functional Test
- Power-Supply Test
- Burn-In Test
- Contacting element in permanent use
- Usage with AC and DC

Note:

HSS-120 ... M will be screwed into KS-113 ... M using special tools (see Page 170/171).

Recommended Screw-in Torque:
 Min.: 10 Ncm / Max.: 20 Ncm

Ordering Example

Series	Tip Material	Tip Style	Tip Diameter (1/100 mm)	Plating	Spring Force (dN)	Collar Height (mm)	Special Designation
	2 = Steel 3 = BeCu			A = Gold S = Silver			

Test Probe:

H S S 1 2 0 3 0 6 3 0 0 A 1 5 0 2 M

Receptacles for HSS-120 ... M:

K S - 1 1 3 3 0 M 2 - T K S - 1 1 3 3 0 M 2 - R

Receptacle for Leakage Test *****:

K S - 1 1 3 3 0 M 2

HSS 150 M / HSS 552 M

Screw-in High-Current Test Probe

Grid:

≥ 5,08 mm


≥ 200 Mil

Installation Height: 10,8/13,8 mm (.425/.543)/7,5 mm (.295)


Recommended Stroke: 4,4/7,4 mm (.173/.291)/2,0 mm (.079)

Mounting and Functional Dimensions




HSS-150 ... M

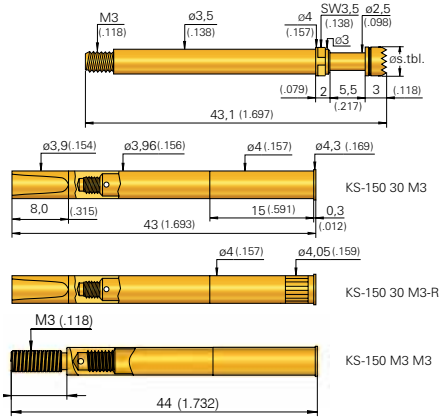

HSS-150 ... MH

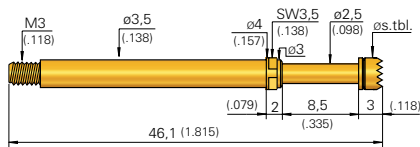

HSS-552 ... M



Collar Height and Installation Height

The Installation Height of the Tip (Dimensions with Receptacle) is determined by the Collar Height.

Collar Height/ Tip	Installation Height (with Receptacle) in mm
02 M	10,8 (.425) HSS 150...M
02 MH	13,8 (.543) HSS 150...M (MH)
03 M	7,5 (.295) HSS 552...M

Mechanical Data	HSS 150... M (MH)
Working Stroke:	4,4 mm (.173) Typ „MH“: 7,4 mm (.291)
Maximum Stroke:	5,5 mm (.217) Typ „MH“: 8,5 mm (.335)
Spring Force at Work. Stroke:	3,0 N (10.8oz) alternative: 5,0 N (18.1oz)

Mechanical Data	HSS 552... M
Working Stroke:	2,0 mm (.079)
Maximum Stroke:	2,5 mm (.098)
Spring Force at Work. Stroke:	2,0 N (7.2oz)

Operating Temperature	Standard:
	-100° up to +200° C

*** Tip Style 05 S:**
The pressed-in silver stud prevents burning or welding of the Test Probe to the test point.

Materials

Plunger:	Barrel:	Spring:	Receptacle:
BeCu, gold-plated or with Silver stud	Brass, gold-plated	Stainless Steel	Brass, gold-plated

Mounting Hole Size

for KS-150 30 M3 + KS-150 M3 M3 + HSS-552 35 M	in CEM 1 and FR 4: ø 3,99 mm (.1571)
for KS-150 30 M3-R:	ø 4,0 - 4,02 mm (.1575 - .1583)

Electrical Data

Current Rating:	50 A
	for short loads up to 80 A
R_i typical:	≤ 10 mΩ

Available Tip Styles HSS-150 M

Material	Tip Style	Plating	Further Versions	
			ø	ø (inch)
3	02	A	ø 4,00 (.157)	
3	03	A	ø 4,00 (.157)	
3	05*	S	ø 4,00 (.157)	
3	06	A	ø 4,00 (.157)	3,00 (.118)
3	17	A	ø 3,00 (.118)	
3	19	A	ø 4,00 (.157)	

* pressed-in Silver studd

Available Tip Styles Special Version HSS-150... MH

Material	Tip Style	Plating	Further Versions	
			ø	ø (inch)
3	02	A	ø 4,00 (.157)	
3	05*	S	ø 4,00 (.157)	
3	06	A	ø 4,00 (.157)	
3	17	A	ø 4,00 (.157)	

Total Length 46,1 mm (1.815), Special Designation „MH“
* pressed-in Silver studd

Available Tip Styles HSS-552 M

Material	Tip Style	Plating	Further Versions	
			ø	ø (inch)
3	06	A	ø 4,00 (.157)	

Note:
HSS-150 ... M and HSS 552 M will be screwed into KS-150 ... M3 and KS-552 ... M using special tools (see Page 170/171).

Recommended Screw-in Torque:
Min.: 10 Ncm / Max.: 20 Ncm

Ordering Example

Series	Tip Material	Tip Style	Tip Diameter (1/100 mm)	Plating	Spring Force (dN)	Collar Height (mm)	Type (alternative MH)
	3 = BeCu			A = Gold S = Silver			

Test Probe:

H S S 1 5 0 3 0 3 4 0 0 A 3 0 0 2 M

Test Probe:

H S S 1 5 0 3 0 6 4 0 0 A 3 0 0 2 M H

Test Probe:

H S S 5 5 2 3 0 6 4 0 0 A 2 0 0 3 M


Receptacle for HSS-150 ... M:

K S - 1 5 0 3 0 M 3 K S - 1 5 0 3 0 M 3 - R K S - 1 5 0 M 3 M 3

Receptacle for HSS-552 ... M:

K S - 5 5 2 3 5 M

Screw-in Switching Probes

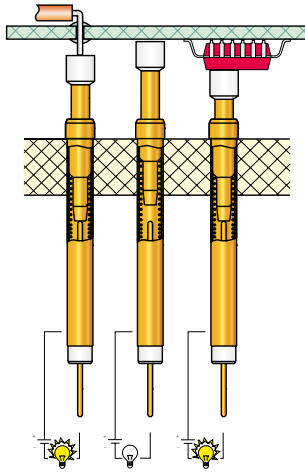

To check the presence of a component, Switching Probes with an insulated tip are normally used.

The example on the left explains the functionality: Should the component be present, then the plunger is pressed down and the contact is closed. Should the component not be present, then the plunger is not activated and the Switching Probe remains open.

Screw-in Switching Probes

SKS-215 M/MF NEW	148
SKS-465 MF	149
SKS-465 SF	150
SKS-435 M	151

Insertable Test Probes SKS from page 77 on.

SKS 215 M / 215 MF

Screw-in Switching Probe

NEW

Grid:

≥ 2,54 mm


≥ 100 Mil

Installation Height: 10,2 - 20,0 mm (.402 - .787)

Switching Path: 1,5 mm (.059)

Mounting and Functional Dimensions


SKS-215 ... M

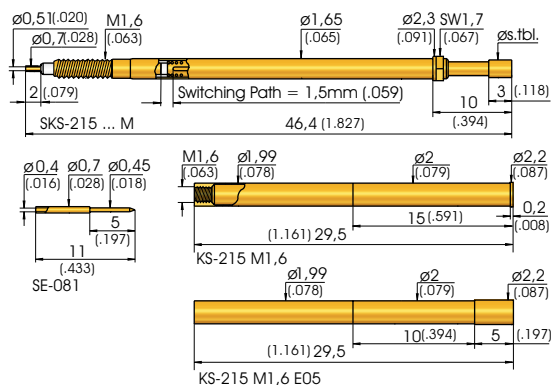


Quick-exchange System

SKS-215 ... MF



NEW

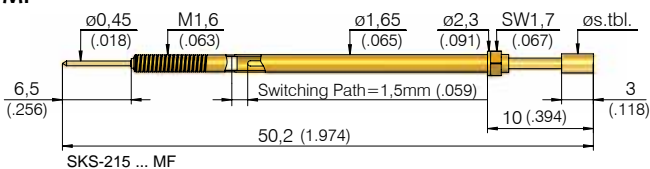

NEW

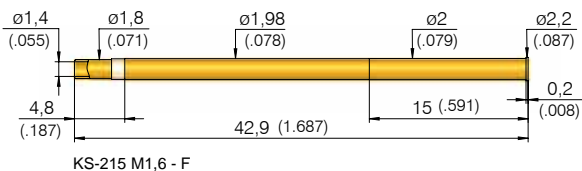

NEW

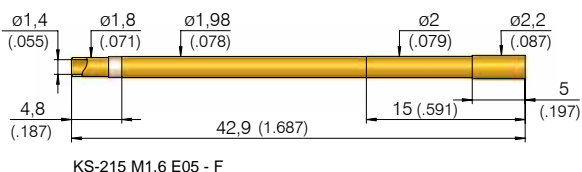

Collar Height and Installation Height

Crimps in the Receptacle prevent the Test Probe from rotating. Different Installation Heights can be variably achieved with different Receptacles.

Material		Tip Style	Plating	Further Versions	
0	2			∅	∅ (inch)
0	02		A		
3	02		A	1,00	(.039)
3	03		A		
3	05		A	0,80	(.030)
3	05		A		
3	06		N		
3	19		A		

Mechanical Data

Switching Path: 1,5 mm (.059)
± 0,2 mm (.008)

Working Stroke: 4,0 mm (.160)

Maximum Stroke: 5,0 mm (.197)

Force at Switching Point: 0,23 N (xxxoz);
0,45 N (xxxoz); 0,9 N (xxxoz)

Force at Working Stroke: 0,80 N (xxxoz);
1,50 N (xxxoz); 3,0 N (xxxoz)

Mounting Hole Size

in CEM 1 and FR 4: ϕ 1,99 mm (.0783)

Electrical Data

Current Rating: 3 A
(see Page 77)

Materials

Plunger: BeCu, gold- or nickel-plated
(or gold-plated with Insulator Cap)

Barrel: Brass, gold-plated

Spring: Steel, gold-plated

Receptacle: Brass, gold-plated

Note:
SKS-215 ... M will be screwed into KS-215 ... M using special tools (see Page 170/171).
Recommended Screw-in Torque:
Min.: 3 Ncm / Max.: 5 Ncm

Note:
The Quick-exchange system „F“ is not compatible with the previous version „S“. This is still available on request.

Designation	Install. Heights
KS-215 M1,6 (-F)	10,2 - 15,5 mm (.402 - .610)
KS-215 M1,6 E05 (-F)	15,2 - 20,0 mm (.598 - .787)

Quick-exchange Receptacles:
Receptacles with end designation „-F“ are quick-exchange Receptacles. The two wires are soldered to the outside wall of the Receptacle and the central Terminal point. This is done after assembling the Receptacle in the Mounting Hole.
The Switching Probe can now be inserted or changed without any further soldering work.


Ordering Example

	Series	Tip Material	Tip Style	Tip Diameter (1/100 mm)	Plating	Spring Force at Working Stroke (dN)	Collar Height (mm)	Type (alternative „MF“)
Test Probe:	SKS	2	15	3	02	180	A	30
Receptacles:	KS-215	M1,6 (-F)	KS-215	M1,6 E05 (-F)				
Plug:	SE-081							

Grid:
 ≥ 3,50 mm
 ≥ 140 Mil

Installation Height: 10,5 - 26,5 mm (.413 - 1.043)
Switching Path: 1,7 mm (.067)


Mounting and Functional Dimensions

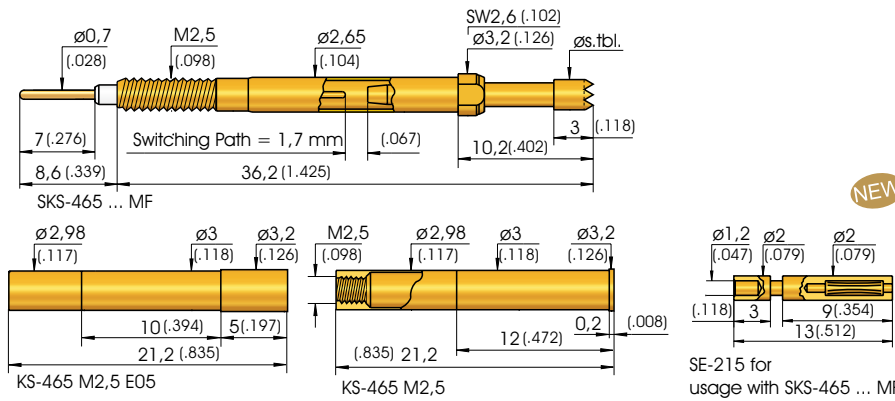

Available Tip Styles

Material	Tip Style	Plating	Further Versions	
			∅	∅ (inch)
0 02		A	5,00 2,30	(.197) (.091)
3 02		A		
3 02		A		
3 03		A		
3 06		A		
3 06		A		
3 06		A	4,00	(.157)
3 19		A		
3 53*		A		
3 56*		A		
3 56*		A		
3 56*		A		


Quick-exchange System

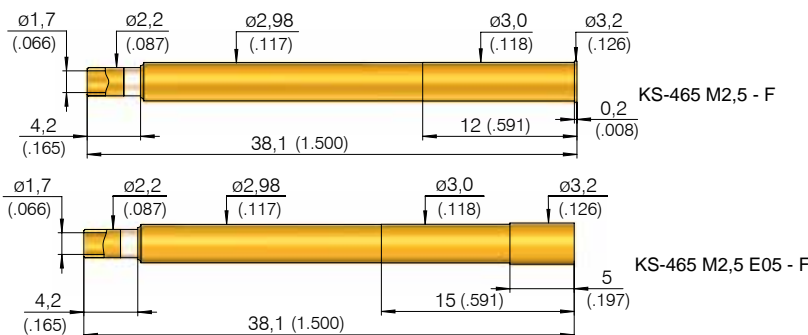

Collar Height and Installation Height

Crimps in the Receptacle prevent the Test Probe from rotating. Different Installation Heights can be variably achieved with different Receptacles.

Designation of the Receptacle	Install. Heights with Tips 02/03/06	Install. Height with Tips 53/56
KS-465 M2,5 (-F)	10,5 - 15,5 mm (.413 - .610)	17,0 - 22,0 mm (.669 - .866)
KS-465 M2,5 E05 (-F)	15,2 - 20,0 mm (.598 - .787)	21,7 - 26,5 mm (.854 - 1.043)



Mechanical Data

Switching Path: 1,7 mm (.067)
 ± 0,3 mm (.012)

Recomm. Work. Stroke: 4,2 mm (.165)

Maximum Stroke: 5,2 mm (.205)

Force at Switching Point: 0,7 N (2.5oz);
 1,8 N (6.5oz); 4,5 N (15oz)

Force at Work. Stroke: 2,0 N (7.2oz);
 3,5 N (12.7oz); 9,0 N (32.5oz)

Materials

Plunger: BeCu, gold-plated
 with or without Insulator Cap

Barrel: Brass, gold-plated

Spring: Stainless Steel

Receptacle: Brass, gold-plated

Insulation: Teflon

Mounting Hole Size

in CEM 1 and FR 4: ∅ 2,98 - 2,99 mm (.1173 - .1177)

The Quick-exchange system „F“ is not compatible with the previous version „S“. This is still available on request.

Electrical Data

Current Rating: 3 A
 (see Page 77)

* Tip Length 9,5 mm (.374)

Quick-exchange Receptacles:

Receptacles with end designation „-F“ are quick-exchange Receptacles. The two wires are soldered to the outside wall of the Receptacle and the central Terminal point. This is done after assembling the Receptacle in the Mounting Hole. The Switching Probe can now be inserted or changed without any further soldering work.

Note:

Probes with Tip Diameter ≤ 3,0 are screwed into KS-465...M using tools, see Page 170/171. Test Probes SKS-465 ... MF with Tip Diameter > 3,0 mm using special tools (special tools on request).
 Recommended Screw-in Torque: Min.: 3 Ncm / Max.: 5 Ncm

Ordering Example

	Series	Tip Material	Tip Style	Tip Diameter (1/100 mm)	Plating	Spring Force at Working Stroke (dN)	Collar Height (mm)	Type
Test Probe:	SKS	4	65	3	06	230	A	20
Receptacles:	KS-465	M2,5	(-F)	KS-465	M2,5	E05	(-F)	
Lamellar Plug:	SE-215							

SKS 465 SF

Screw-in Switching Probe

Grid:


≥ 3,50 mm

≥ 140 Mil


Installation Height: 10,5 - 26,5 mm (.413 - 1.043)

Switching Path: 1,7 mm (.067)


Mounting and Functional Dimensions

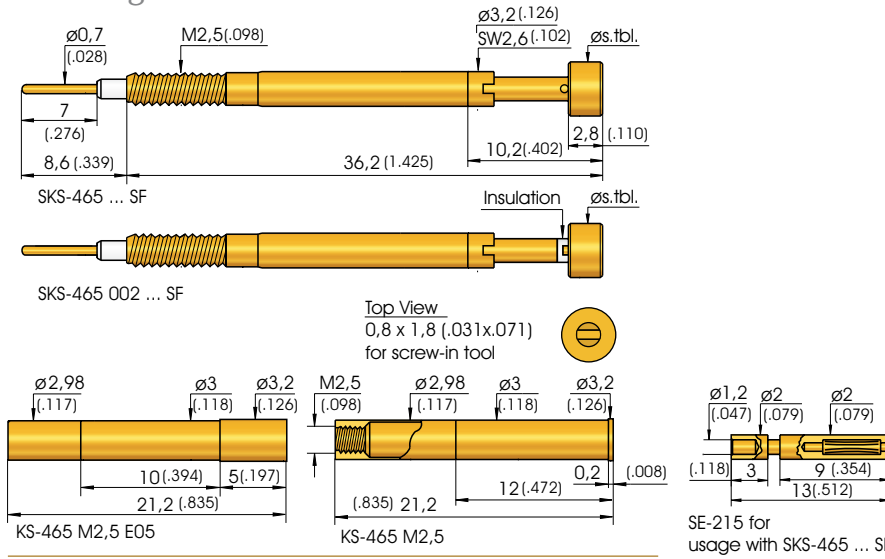

Quick-exchange System

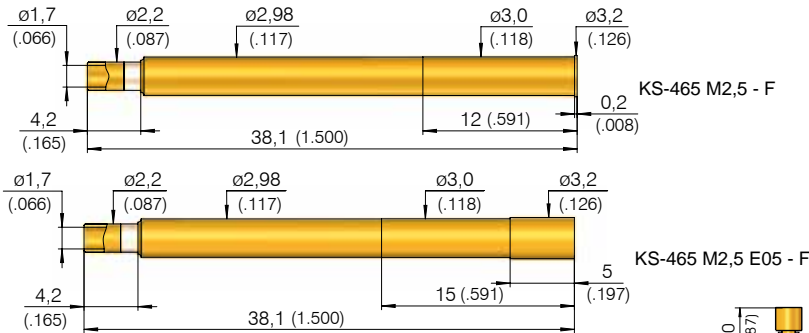

Designation of the Receptacle	Install. Heights with Tips 02 or 002	Install. Height with Tips 52
KS-465 M2,5 (-F)	10,5 - 15,5 mm (.413 - .610)	17,0 - 22,0 mm (.669 - .866)
KS-465 M2,5 E05 (-F)	15,2 - 20,0 mm (.598 - .787)	21,7 - 26,5 mm (.854 - 1.043)



Available Tip Styles

Material	Tip Style for SKS-465 302 / 352 ... S	Plating	Further Versions	
			∅	∅ (inch)
3 02		A	∅ 3,00 (.118)	3,50 (.138)
			4,00 (.157)	
3 02		A	∅ 4,50 (.177)	5,00 (.197)
			5,50 (.217)	
			5,90 (.232)	
3 52*		A	∅ 3,00 (.118)	3,50 (.138)

* 6,5 mm (.256) longer

Available Tip Styles

Material	Tip Style for SKS-465 002 ... S with insulated Tip	Plating	Further Versions	
			∅	∅ (inch)
0 02		A	∅ 3,00 (.118)	3,50 (.138)
			4,00 (.157)	
0 02		A	∅ 4,50 (.177)	5,00 (.197)
			5,90 (.232)	

Collar Height and Installation Height

Crimps in the Receptacle prevent the Test Probe from rotating. Different Installation Heights can be variably achieved with different Receptacles.

Quick-exchange Receptacles:

Receptacles with end designation „-F“ are quick-exchange Receptacles. The two wires are soldered to the outside wall of the Receptacle and the central Terminal point. This is done after assembling the Receptacle in the Mounting Hole. The Switching Probe can now be inserted or changed without any further soldering work.

Note:

The Quick-exchange system „F“ is not compatible with the previous version „S“. This is still available on request.

Note:

The Test Probes of the Series SKS-465 ... SF using special tools (see Page 170/171)

Recommended Screw-in Torque:
Min.: 3 Ncm / Max.: 5 Ncm

Mechanical Data

Switching Path: 1,7 mm (.067)
± 0,3 mm (.012)

Recomm. Work. Stroke: 4,2 mm (.165)

Maximum Stroke: 4,5 mm (.177)

Force at Switching Point: 0,7 N (2.5oz);
1,8 N (6.5oz); 4,5 N (15oz)

Force at Work. Stroke: 2,0 N (7.2oz);
3,5 N (12.7oz); 9,0 N (32.5oz)

Materials

Plunger: BeCu or Brass, gold-plated

Barrel: Brass, gold-plated

Spring: Steel, gold-plated or Stainless Steel

Receptacle: Brass, gold-plated

Insulation: Teflon (at Tip „002“: Peek)

Mounting Hole Size

in CEM 1 and FR 4: ∅ 2,98 - 2,99 mm (.1173 - .1177)

Electrical Data

Current Rating: 3 A
(see Page 77)


Ordering Example

Series	Tip Material 0 = Peek 3 = BeCu	Tip Style	Tip Diameter (1/100 mm)	Plating A = Gold	Spring Force at Working Stroke (dN)	Collar Height (mm)	Type											
Test Probe:	S	K	S	4	6	5	3	0	2	4	5	0	A	2	0	0	2	SF
Receptacles:	K S - 4 6 5 M 2,5 (-F)			K S - 4 6 5 M 2,5 E 05 (-F)														
Lamellar Plug:	S E - 2 1 5																	

Grid:
 ≥ 4,50 mm
 ≥ 177 Mil

Installation Height: 20,8 mm (.819)
Switching Path: 6,0 mm (.236)

Mounting and Functional Dimensions

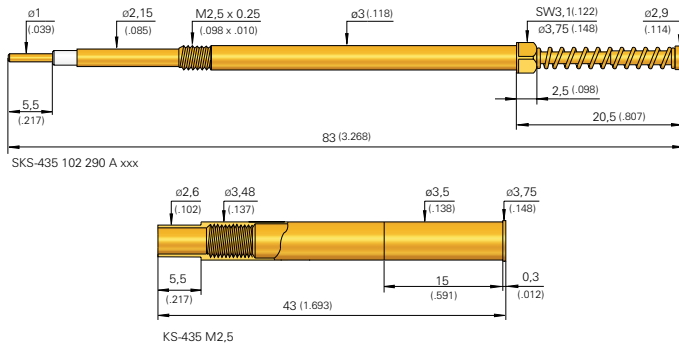

Available Tip Styles

Material	Tip Style	Plating	Further Versions	
			∅	∅ (inch)
1	02	A	∅ 2,90 (.114)	

Collar Height and Installation Height

The Installation Height of the Tip is always 20,8 mm (.819) (Dimensions with Receptacle). Test Probe can only be used with Receptacle.

Mechanical Data

Switching Path: 6,0 mm (.236)
 ± 0,2 mm (.008)
Maximum Stroke: 8,0 mm (.315)
Force at Switching Point: 13,5 N (48.6oz);
 18,5 N (66.6oz); 23,5 N (84.6oz)
Force at 80% Force: 13,5 N (48.6oz);
 18,5 N (66.6oz); 23,5 N (84.6oz)

Electrical Data

Current Rating: 3 A
 (see Page 77)

Materials

Plunger: Brass, gold-plated
Barrel: Brass, gold-plated
Spring: Steel, gold-plated or Stainless Steel
Receptacle: Brass, gold-plated
Insulation: Teflon

Mounting Hole Size

in CEM 1 and FR 4: ∅ 3,48 - 3,49 mm
 (.1370 - .1374)

Note:

SKS-435 ... M will be screwed into KS-435 M2.5 using special tools (see Page 170/171).

Recommended Screw-in Torque:
 Min.: 10 Ncm / Max.: 20 Ncm

Ordering Example

Series	Tip Material 1 = Brass	Tip Style	Tip Diameter (1/100 mm)	Plating A = Gold	Spring Force (dN)	Type
--------	---------------------------	-----------	----------------------------	---------------------	----------------------	------

Test Probe:

S K S 4 3 5 1 0 2 2 9 0 A 1 3 5 M

Receptacle:

K S - 4 3 5 M 2 . 5

Classical RF-Applications

Impedance 50Ω

Examples: DAB, GPS and Telecommunication

For a complete overview of all available testing solutions please see current RF Catalog.

FAKRA Signal
Conductor Plug



FAKRA Signal
Conductor Jack



GT13 Signal
Conductor Plug




GT16 Signal
Conductor Plug




GT16 Signal
Conductor Jack



Customizing and connecting example

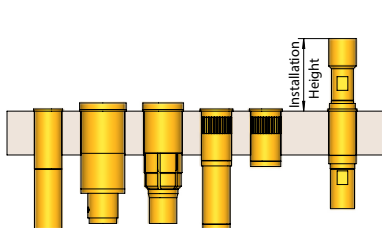

RF Probe in
Receptacle

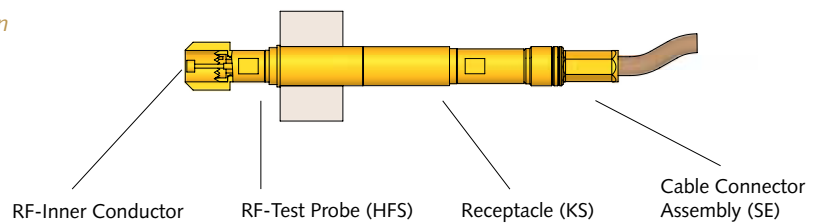

Receptacles for press-in, screw-in or float mounted versions are available.

RF/Digital



For more information
please have a look at the
current RF-Catalog


Classical RF-Applications	NEW	152
Digital RF-Applications	NEW	154



Digital RF-Applications

With differential impedance
Examples: USB, HDMI and control signal


HSD Signal Conductor Plug





HSD Signal Conductor Jack



MX49 Signal Conductor Jack



Customizing and connecting example

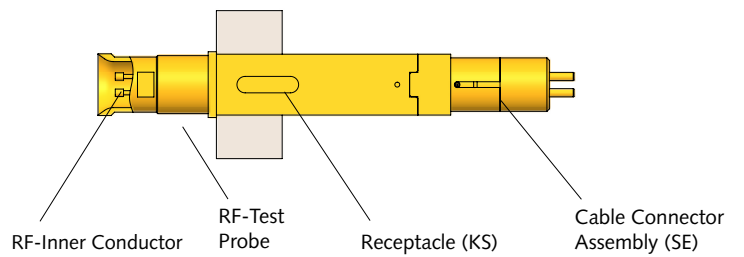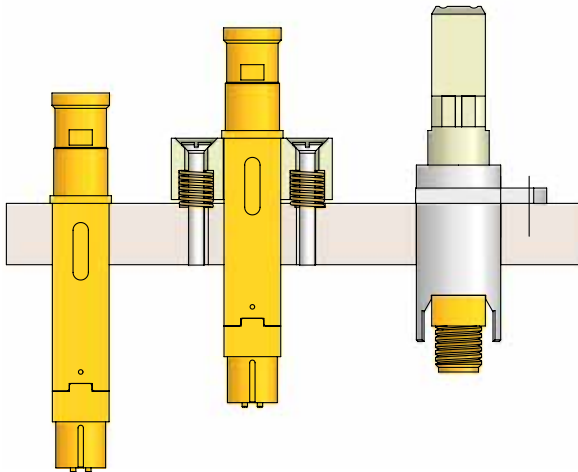

RF-Probe without Receptacle

RF-Probe with flexible Mounting

RF-Probe with flange




For a complete overview of all available testing solutions please see current RF Catalog.

Non-rotating Probes

To avoid damage of the connector housing when rectangular or so-called spade-headed tip-styles are used, it is eminent to ensure that the home-position of the Probe does not change. Therefore, non-rotating Probes are designed in such a way that the plunger head is guided by force and subsequently rotating is prevented.

Solely when the Probe is pressed/screwed into the Receptacle is it necessary to set the desired position of the plunger head.

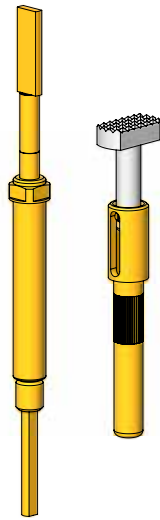

Non-rotating Probes

GKS-803 M	156
GKS-710	157
GKS-714	158
GKS-098	158
GKS-098 M	159
GKS-746 M	160
GKS-747 M	161

GKS 803 M

Screw-in Test Probe with continuous Plunger

Grid:



≥ 4,50 mm

≥ 177 Mil

Installation Height: 18,0 mm (.709)

Recommended Stroke: 6,4 mm (.252)

Mounting and Functional Dimensions

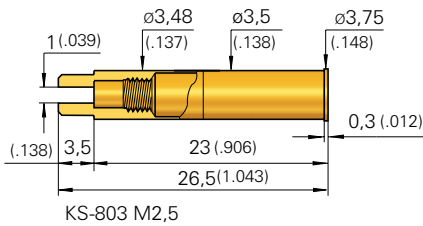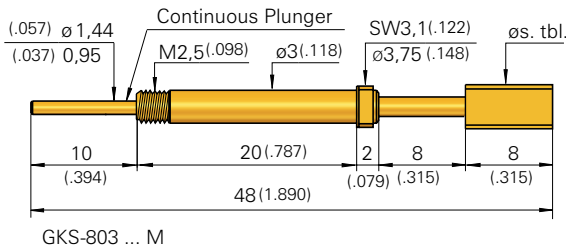

Available Tip Styles

Material	Tip Style	Plating	Further Versions	
			∅	∅ (inch)
1 02	0.8 ∅2.5 208	A		
1 02	1.6 ∅2.5 216	A		
3 02	∅ 2,30 (.091)	A		
3 06	∅ 3,00 (.118)	A		

Collar Height and Installation Height

The Installation Height of the Tip is determined by the Collar Height.

Collar Height	Installation Height
02	18,0 mm (.709)

Mechanical Data

Working Stroke: 6,4 mm (.252)
Maximum Stroke: 8,0 mm (.315)
Spring Force at Work. Stroke: 1,5 N (5.4oz);
 5,0 N (18.1oz)

Materials

Plunger: BeCu, gold-plated
Plunger head: BeCu or Brass, gold-plated
Barrel: Brass, gold-plated
Spring: Stainless Steel
Receptacle: Brass, gold-plated

Electrical Data

Current Rating: 5 - 15 A
R_i typical: < 30 mΩ

Mounting Hole Size

in CEM 1 and FR 4: ∅ 3,49 mm (.1374)

Note:

When screwing in the Test Probe into the Receptacle the Plunger is secured against rotation. (The flat section at the end of the Plunger moves into the slit at the end of the Receptacle.)

Note:

Plunger tip with flat section: the flat section of the plunger tip is set at 90° to the flat section at the end of the Plunger.

Note:

GKS-803 ... M will be screwed into KS-803 M2.5 using special tools (see Page 170/171).


Recommended Screw-in Torque:
 Min.: 10 Ncm / Max.: 20 Ncm

Ordering Example


Series	Tip Material 1 = Brass 3 = BeCu	Tip Style	Tip Diameter (1/100 mm)	Plating A = Gold	Spring Force (dN)	Collar Height (mm)	Type
Test Probe:	G K S	8 0 3	3 0 6	3 0 0	A	1 5	0 2 M
Receptacle:	K S - 8 0 3 M 2.5						

Grid:
 ≥ 2,54 mm
 ≥ 100 Mil
Installation Height: see below
Recommended Stroke: 4,0 mm (.157)

Mounting and Functional Dimensions

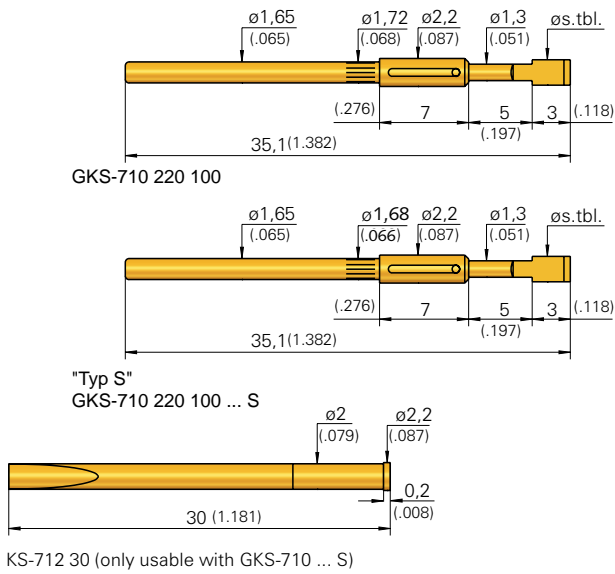

Material		Tip Styles		Plating	Further Versions	
					Install. Height (without KS)	∅/Plating
2	20			1,00 (.039)	A	15
2	20			0,50 (.020)	R/A	18 (.709) / 0,40/R (.016)
2	21			0,50 (.020)	A	15 (.591) / 1,30/A (.051)
2	22			$\phi 2,00$ (.079)	A	15 (.591)
2	23			$\phi 1,30$ (.051)	R	13 (.512)
2	26			2,00 (.079)	A	15 (.591)



Collar Height and Installation Height

The Installation Height at the Tip (Dimension without KS) is determined by the Collar Height and the Tip Length (see Table „Available Tip Styles“).

Mechanical Data

Working Stroke: 4,0 mm (.157)
Maximum Stroke: 5,0 mm (.197)
Spring Force at Work. Stroke: 1,5 N (5.4oz)
alternative: 3,0 N (10.8oz); 5,0 N (18.1oz)

Electrical Data

Current Rating: 5 - 8 A
R_i typical: < 30 mΩ

Materials

Plunger: Steel, gold- or rhodium-plated
Barrel: Brass, gold-plated
Spring: Steel, gold-plated
Receptacle: Brass, gold-plated

Mounting Hole Size

in CEM 1 with Receptacle: $\phi 1,98 - 2,00$ mm (.0780 - .0787)
in FR 4 with Receptacle: $\phi 1,99 - 2,01$ mm (.0783 - .0791)
without Receptacle: $\phi 1,66$ mm (.0654)

Note:

The knurl on the barrel of the Test Probe guarantees sure fitting in the Receptacle or directly into the Probe Plate.

Please specify Special Designation „S“ when using Receptacle KS-712 30.

Tools:

Insertion and Extraction Tools for GKS and KS see Page 118.

Ordering Example

Series	Tip Material	Tip Style	Tip Diameter (1/100 mm)	Plating	Spring Force (dN)	Collar Height (mm)	Special Designation (alternative „S“)
GKS	2 = Steel	710	220	A = Gold	15	07	

Test Probe:

G K S 7 1 0 2 2 0 1 0 0 R 1 5 0 7

Receptacle:

K S - 7 1 2 3 0

GKS 714 / 098

Non-Rotating Test Probe

Grid:


≥ 5,08 mm

≥ 200 Mil


Installation Height: see below

Recommended Stroke: 4,0 / 6,0 mm (.157 / .236)


Mounting and Functional Dimensions

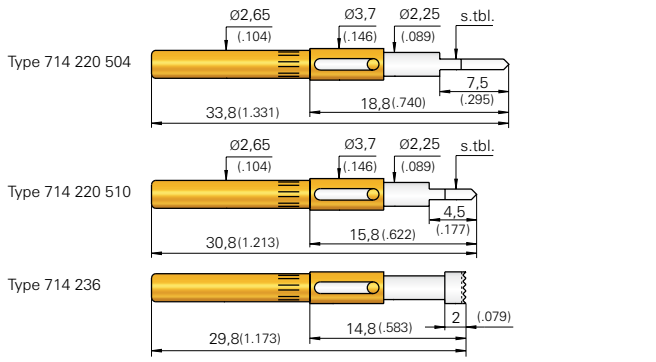

GKS-714 ... 10

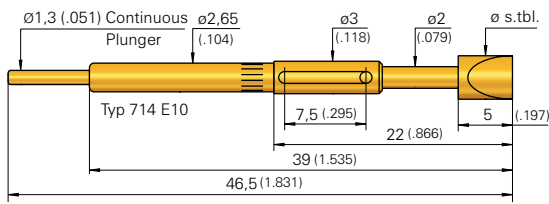


GKS-098 ... 07

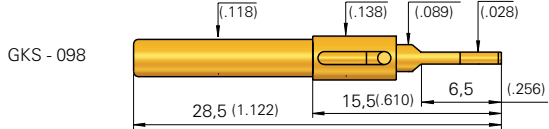

Collar Height and Installation Height

The Installation Height at the Tip (Dimension without KS) is determined by the Collar Height and the Tip Length (see Table „Available Tip Styles“).



Mechanical Data

Spring Force at Work. Stroke: 1,5 N (5.4oz)
alternativ: 3,0 N (10.8oz); 5,0 N (18.1oz)

	714...07	714...10	098...07
Working Stroke	4,0 mm (.157)	6,0 mm (.236)	4,0 mm (.157)
Maxim. Stroke	5,0 mm (.197)	7,0 mm (.276)	5,0 mm (.197)

Electrical Data

Current Rating: 8 - 10 A
R_i typical: < 30 mΩ

Material

Plunger: Steel or BeCu, gold- or rhodium-plated
Barrel: Brass, gold-plated
Spring: Steel, gold-plated
Receptacle: Brass, gold-plated

Mounting Hole Size for GKS-714

with Receptacle: Ø 2,98 - 2,99 mm (.1173 - .1177)
without Receptacle: Ø 2,66 mm (.1047)

Mounting Hole Size for GKS-098

with Receptacle: Ø 3,48 - 3,49 mm (.1370 - .1374)

Available Tip Styles

GKS-714 ... 07

Material	Tip Style	Plating	Install. and Functional Dim.	
			Collar Height	Install. Height
2 20	504	R	E 07	18,8 (.740)
2 20	510	R	E 07	15,8 (.622)
2 36	630	R	E 07	14,8 (.583)

Available Tip Styles

GKS-714 ... 10

Material	Tip Style	Plating	Install. and Functional Dim.	
			Collar Height	Install. Height
2 22	Ø 4,00 (.157)	A	E 10	22,0 (.866)
2 23	Ø 2,00 (.079)	A	E 10	22,0 (.866)
2 23	Ø 4,00 (.157)	A	E 10	22,0 (.866)

Available Tip Styles

GKS-098 ... 07

Material	Tip Style	Plating	Install. and Functional Dim.	
			Collar Height	Install. Height
3 29	Ø 3,00 (.118)	R	E 07	15,5 (.610)

Note:

For the Test Probes series 714, the Receptacle of the series KS-714 23 are used (Dimension like KS-113 23, see Page 58). For the Test Probes of the series GKS-098, the Receptacles KS-103 23 are used (see Page 60).

Tools:

Insertion and Extraction Tools for GKS and KS see Page 118.

Ordering Example

Series	Tip Material	Tip Style	Tip Diameter (1/100 mm)	Plating	Spring Force (dN)	Collar Height (mm)
	2 = Steel 3 = BeCu			A = Gold R = Rhodium		

Test Probe:

G K S 7 1 4 2 2 0 5 0 4 R 1 5 0 7

Test Probe:

G K S 0 9 8 3 2 9 3 0 0 R 1 5 0 7

Lamellar Plug for Type 714 E10:

S E - 5 0 3 (see drawing GKS-503 on Page 59. Cannot be used with KS)

Receptacle for GKS 714:

K S - 7 1 4 2 3


Receptacle for GKS 098:

K S - 1 0 3 2 3


Grid:
 ≥ 5,08 mm
 ≥ 200 Mil

Installation Height: 15,3 mm (.602)
Recommended Stroke: 4,0 mm (.157)

Mounting and Functional Dimensions

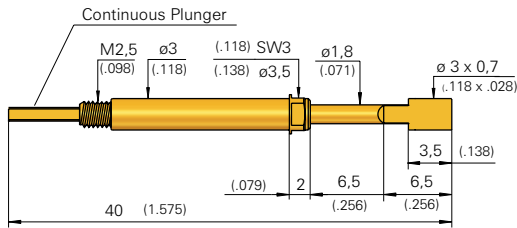


GKS-098 329 300 070 A xx02 ML

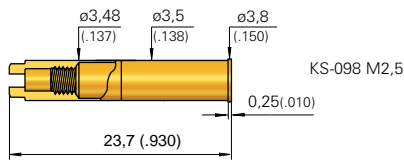


KS-098 M2,5

Available Tip Styles

Material	Tip Style	Plating	Further Versions	
			∅	∅ (inch)
3	29	A		



300 070



GKS-098 ... ML

Installation Height with KS

Install. Height „ML“: 15,3 mm (.602)

Note:
Further Versions on request.

Note:
When screwing the Test Probe into the Receptacle, the plunger will be secured against rotation. The flat surface at the end of the plunger fits into the slot at the end of the Receptacle.

The flat surface on the Plunger Tip is in the same alignment as the flat surface on the rear end of the Plunger.

Note:
GKS 098 ... M will be screwed into KS-098 M 2.5 using a special tool (see Page 170/171).

Recommended Screw-in Torque:
Min.: 10 Ncm / Max.: 20 Ncm

Mechanical Data

Working Stroke: 4,0 mm (.157)
Maximum Stroke: 5,0 mm (.197)
Spring Force at Work. Stroke: 1,5 N (5.4oz);
 3,0 N (10.8oz)

Materials

Plunger: BeCu, gold-plated
Barrel: Brass, gold-plated
Spring: Steel, gold-plated
Receptacle: Brass, gold-plated

Electrical Data

Current Rating: 10 A
R_i typical: < 30 mΩ

Mounting Hole Size

in CEM 1 and FR 4: ∅ 3,48 - 3,49 mm
 (.1370 - .1374)

Ordering Example

Series	Tip Material	Tip Style	Tip Diameter (1/100 mm)	Spade Width	Plating	Spring Force (dN)	Collar Height (mm)	Type
3	BeCu	29	3	0.7	A = Gold	15	0.2	ML

Test Probe:

G K S 0 9 8 3 2 9 3 0 0 0 7 0 A 1 5 0 2 M L

Receptacle:

K S - 0 9 8 M 2 . 5

GKS 746 M

Screw-in Non-Rotating Test Probe with continuous Plunger

Grid:


≥ 2,54 mm

≥ 100 Mil

Installation Height: 10,5 mm (.413)

Recommended Stroke: 4,0 mm (.157)

Mounting and Functional Dimensions

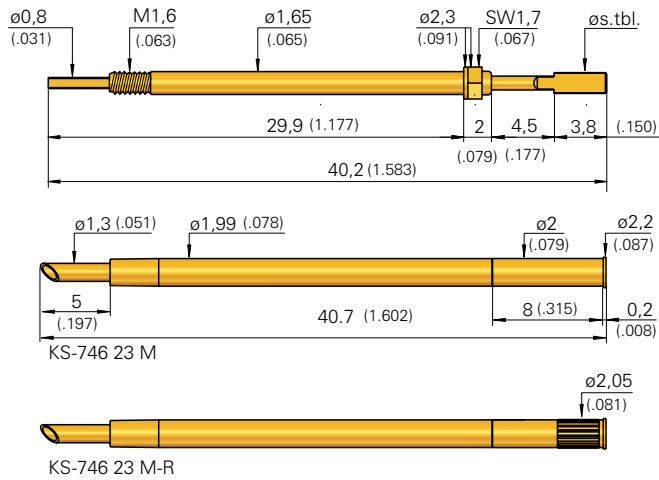


Available Tip Styles

Material	Tip Style	Plating	Further Versions	
			∅	∅ (inch)
3 20		A		
3 20		A		
3 20		A		
3 20		A		
3 05 *		A		
2 14 *		A		

Collar Height and Installation Height

The Installation Height of the Test Probe is determined by the Collar Height of the Receptacle.

Collar Height	Installation Height
02	10,5 mm (.413)

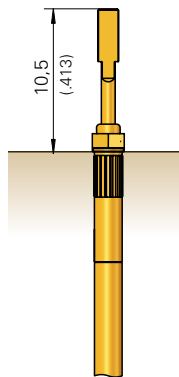

Note:

* Special Version: availability on request.

Note:

When screwing the Test Probe into the Receptacle, the plunger will be secured against rotation. The flat surface at the end of the plunger fits into the slot at the end of the Receptacle.

The assembled unit is then vacuum-sealed and can therefore be used for leakage tests.

The flat surface on the Plunger Tip is in the same alignment as the flat surface on the rear end of the Plunger.

Note:

GKS 746 ... M will be screwed into KS-746 23 M (-R) using special tools (see Page 170/171).

Recommended Screw-in Torque: Min.: 3 Ncm / Max.: 5 Ncm

Mechanical Data

Working Stroke: 4,0 mm (.157)
Maximum Stroke: 4,4 mm (.173)
Spring Force at Work. Stroke: 1,5 N (5.4oz)
alternative: 3,0 N (10.8oz)

Materials

Plunger: Steel or BeCu, gold-plated
Barrel: Brass, gold-plated
Spring: Steel, gold-plated
Receptacle: Brass, gold-plated

Electrical Data

Current Rating: 5 - 8 A
R_i typical: < 30 mΩ

Mounting Hole Size

for KS-746 23 M
in CEM 1 and FR 4: ∅ 1,99 mm (.0783)
for KS-746 23 M-R
in CEM 1 and FR 4: ∅ 2,00 - 2,02 mm (.0787 - .0795)

Ordering Example

Series	Tip Material 2 = Steel 3 = BeCu	Tip Style	Tip Diameter (1/100 mm) (A)	Spade Width (B)	Plating A = Gold	Spring Force (dN)	Collar Height (mm)	Type
--------	---------------------------------------	-----------	-----------------------------------	--------------------	---------------------	----------------------	-----------------------	------

Test Probe:

G K S 7 4 6 3 2 0 1 5 0 0 5 0 A 1 5 0 2 M

Receptacle:

K S - 7 4 6 2 3 M





Screw-in Tools:

K S - 7 4 6 2 3 M - R

Grid:
 ≥ 4,50 mm
 ≥ 180 Mil

Installation Height: 16,2 / 20,2 mm (.638 / .795)
 Recommended Stroke: 4,0 mm (.157)

Mounting and Functional Dimensions

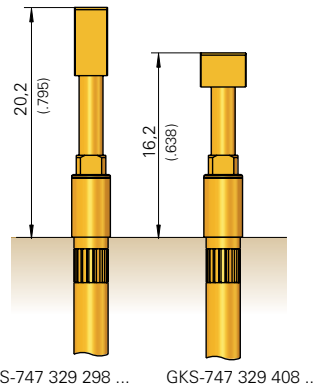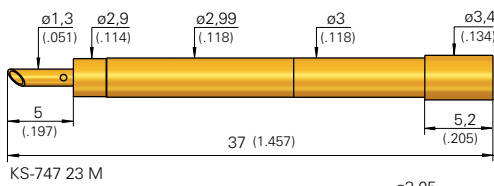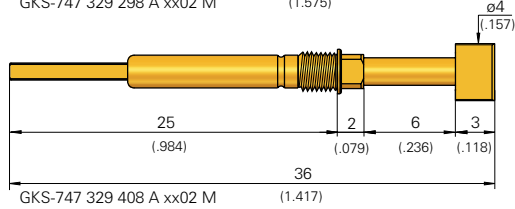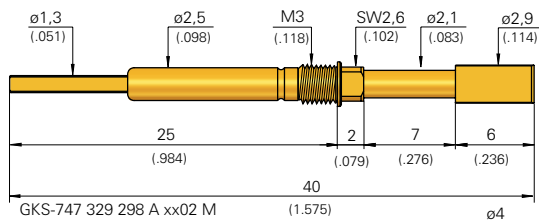

Collar Height and Installation Height

The Installation Height at the Tip (Dimension without KS) is determined by the Collar Height and the Tip Length (see Table „Available Tip Styles“).

Mechanical Data

Working Stroke: 4,00 mm (.157)
Maximum Stroke: 5,0 mm (.197)
Spring Force at Work. Stroke: 1,5 N (5.4oz);
 3,0 N (10.8oz)

Materials

Plunger: Steel or BeCu, gold-plated
Barrel: Brass, gold-plated
Spring: Steel, gold-plated
Receptacle: Brass, gold-plated

Electrical Data

Current Rating: 8 A
R_i typical: < 30 mΩ

Mounting Hole Size

for KS-747 23 M
in CEM 1 and FR 4: ∅ 2,99 mm (.1177)
for KS-747 23 M-R
in CEM 1 and FR 4: ∅ 3,00 - 3,02 mm (.1181 - .1189)

Available Tip Styles

Material	Tip Style	Plating	Install. Height with KS	
			Collar Height	Install. Height
3 29		A	02	20,2 (.795)
3 29		A	02	16,2 (.638)

Note:

When screwing the Test Probe into the Receptacle, the plunger will be secured against rotation. The flat surface at the end of the plunger fits into the slot at the end of the Receptacle.

The assembled unit is then vacuum-sealed and can therefore be used for leakage tests.

The flat surface on the Plunger Tip is in the same alignment as the flat surface on the rear end of the Plunger.

Note:

GKS 747 ... M will be screwed into KS-747 23 M (-R) using special tools (see Page 170/171).

Recommended Screw-in Torque:
 Min.: 10 Ncm / Max.: 20 Ncm

Ordering Example

Series	Tip Material 3 = BeCu	Tip Style	Tip Diameter (1/100 mm)	Plating A = Gold	Spring Force (dN)	Collar Height (mm)	Type
--------	--------------------------	-----------	----------------------------	---------------------	----------------------	-----------------------	------

Test Probe:

G K S 7 4 7 3 2 9 2 9 8 A 1 5 0 2 M

Receptacle:

K S - 7 4 7 2 3 M K S - 7 4 7 2 3 M - R

The new Test Fixtures Catalog

Our new Test Fixtures Catalog presents not only manual, pneumatic and vacuum-operated Test Fixtures, but especially also a choice of customized Test Fixtures. Based on these proven and remarkable solutions, you will get an impression of our many years of experience in customized Test Fixture design and manufacturing as well as the flexibility and know-how of INGUN.



*Ask for our Test Fixtures Catalog
or take a look on our homepage
www.ingun.com.*




Push-back Probes

Push-back Probes are used when checking the locking in of the connector contacts into connectors.

The Push-back Probes are available with spring forces up to 34N, which represents the spring-force demanded during testing connector contacts. They distinguish themselves with their rugged design and the necessary high installation heights.

To prevent the mainly rectangular/spade-type tip-styles from rotating, all Push-back Probes have a non-rotating design.

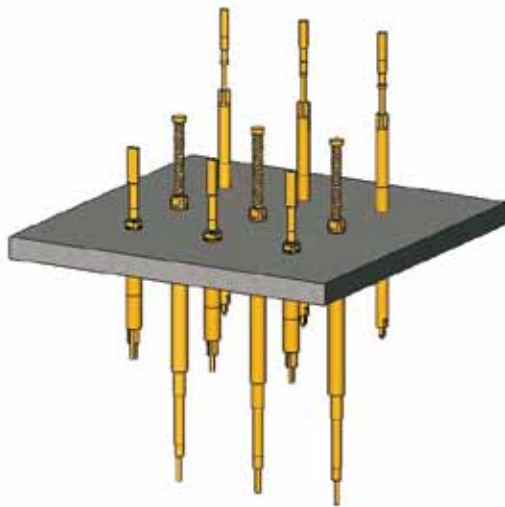

Push-back Probes

VF 25	164
VF 3	165
VF 4	166
VF 5	167

VF 25

Push-back Probe

Grid:




≥ 2,54 mm

≥ 100 Mil

Installation Height: 40,5 mm (1.594)

Recommended Stroke: 5,0 mm (.197)

Mounting and Functional Dimensions

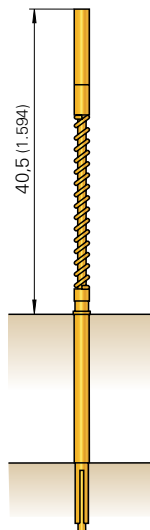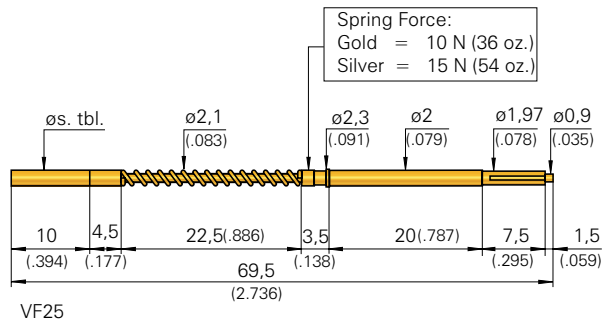

Installation Height

Installation Height: 40,5 mm (1.594)

Mechanical Data

Working Stroke: 5,0 mm (.197)

Maximum Stroke: 6,0 mm (.236)

Spring Force at Work. Stroke: 10 N (36oz); 15 N (54oz)

Interchangeable Stroke: > 6,0 mm (.236)

Materials

Plunger: Steel, gold-plated

Spring: Steel, gold-plated

Receptacle: Bronze, gold-plated

Electrical Data

Current Rating: 5 A

R_i typical: < 50 mΩ

Mounting Hole Size

in CEM 1 and FR 4: ∅ 2,00 mm (.0787)

Available Tip Styles

Material	Tip Style	Plating	Further Versions	
			∅	∅ (inch)
2	03	A	∅ 2,20 (.087)	
2	29	A	258	
2	29	A	193	

Note:

The flat surface on the Plunger Tip is in the same alignment as the flat surface on the rear of the Plunger.

Assembly Notice:

The patented design allows the test probe (consisting of plunger and spring) to be easily exchanged according to the following procedure:

- press the Plunger into the Receptacle until it reaches it's limit
- turn the Plunger 90°
- release the Plunger

In order to stabilize the Test Probe and to avoid damage to the Receptacle during mounting and dismounting, we recommend that either an additional guide plate be inserted underneath, or that the Guide Bush FH-VF 25 be attached to the end of the Receptacle after mounting, and subsequently soldered to secure it.



Ordering Example

	Series	Tip Material 2 = Steel	Tip Style	Tip Diameter (1/100 mm)	Plating A = Gold	Spring Force (dN)
Test Probe:	V F 2 5	2	2 9	1 9 3	A	1 5 0
Receptacle:	K S - V F 2 5					
Receptacle (pre-wired with 0,2m Wire AWG 34):	K S - V F 2 5 V					
Guide Bush:	F H - V F 2 5					


Grid:
 ≥ 3,00 mm
 ≥ 120 Mil

Installation Height: 40,5/44,5/46,5 mm (1.595/1.752/1.831)
Recommended Stroke: 5,0 mm (.197)

Mounting and Functional Dimensions

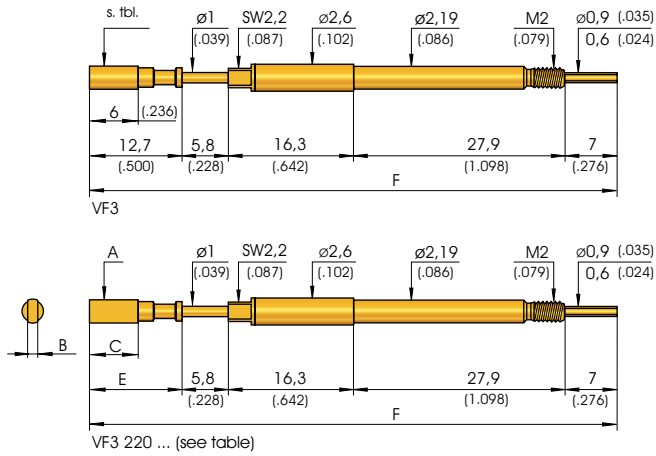

		Available Tip Styles			
Material	Tip Style	Plating	Further Versions		
			∅	∅ (inch)	
2	02	A	1,50 1,80	(.059) (.071)	
2	03	A	2,20 3,00	(.087) (.118)	
2	05	A	1,70	(.067)	
2	06	A	2,70 3,00	(.106) (.118)	
2	20	A	see Table		

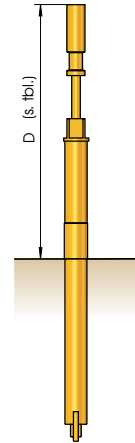

Part No.	A Tip-∅ mm (inch)	B Width of Spade in mm (inch)	C Length of Spade in mm (inch)	D Installation Height in mm (inch)	E Tip Height in mm (inch)	F Total Length mm (inch)
VF3 220 250 080 A 405 xx	2,5 (.098)	0,8 (.031)	6,0 (.236)	40,5 (1.594)	12,7 (.500)	69,7 (2.744)
VF3 220 250 050 A 405 xx	2,5 (.098)	0,5 (.020)	6,0 (.236)	40,5 (1.594)	12,7 (.500)	69,7 (2.744)
VF3 220 250 150 A 405 xx	2,5 (.098)	1,5 (.059)	6,0 (.236)	40,5 (1.594)	12,7 (.500)	69,7 (2.744)
VF3 220 190 050 A 405 xx	1,9 (.075)	0,5 (.020)	6,0 (.236)	40,5 (1.594)	12,7 (.500)	69,7 (2.744)
VF3 220 190 080 A 405 xx	1,9 (.075)	0,8 (.031)	6,0 (.236)	40,5 (1.594)	12,7 (.500)	69,7 (2.744)
VF3 220 400 060 A 445 xx	4,0 (.160)	0,6 (.024)	10,0 (.394)	44,5 (1.752)	16,7 (.657)	73,7 (2.902)
VF3 220 220 120 A 405 xx	2,2 (.087)	1,2 (.047)	6,0 (.236)	40,5 (1.594)	12,7 (.500)	69,7 (2.744)
VF3 220 270 080 A 405 xx	2,7 (.106)	0,8 (.031)	6,0 (.236)	40,5 (1.594)	12,7 (.500)	69,7 (2.744)
VF3 220 250 080 A 465 xx	2,5 (.098)	0,8 (.031)	12,0 (.472)	46,5 (1.831)	18,7 (.736)	75,7 (2.980)

Installation Height
 Installation Height with KS: see Table

Note:
 The flat surface on the Plunger Tip is in the same alignment as the flat surface on the rear of the Plunger.

Note:
 VF 3 will be screwed into KS-VF 3 using special tools (see Page 170/171).

Recommended Screw-in Torque:
 Min.: 3 Ncm / Max.: 5 Ncm


Mechanical Data
Working Stroke: 5,0 mm (.197)
Maximum Stroke: 5,5 mm (.217)
Spring Force at Work. Stroke: 5,0 N (18oz);
 10,0 N (34.6oz); 15,0 N (54oz)

Materials
Plunger: Steel, gold-plated
Barrel: Brass, gold-plated
Spring: Steel, gold-plated
Receptacle: Brass, gold-plated

Electrical Data
Current Rating: 8 A
R_i typical: < 30 mΩ

Mounting Hole Size
in CEM 1 and FR 4: ∅ 2,5 mm (.098)

Ordering Example

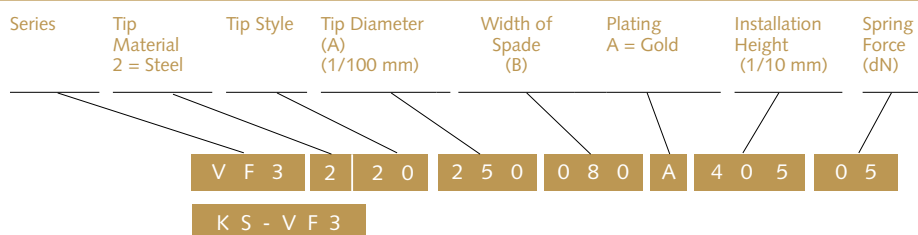

VF 4

Push-back Probe

Grid:


≥ 4,00 mm

≥ 157 Mil


Installation Height: 40,5 mm (1.594)

Recommended Stroke: 5,0 mm (.197)


Mounting and Functional Dimensions

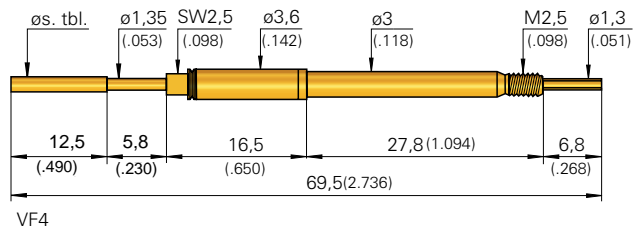

VF4



KS-VF4

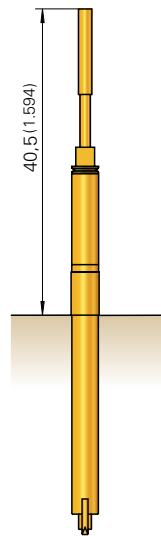

Installation Height

Installation Height: 40,5 mm (1.594)

Mechanical Data

Working Stroke: 5,0 mm (.197)
Maximum Stroke: 5,5 mm (.220)
Spring Force at Work. Stroke: 15 N (54oz)
alternative: 25 N; 20 N (72oz)

Materials

Barrel: Brass, gold-plated
Plunger: Steel, gold-plated
Spring: Steel, gold-plated
Receptacle: Bronze, gold-plated

Electrical Data

Current Rating: 8 A
R_i typical: < 30 mΩ

Mounting Hole Size

in CEM 1 and FR 4: ø 3,50 mm (.1378)

Available Tip Styles

Material	Tip Style	Plating	Further Versions	
			∅	∅ (inch)
2 02		A		
2 02		A		
2 03		A	4,00	(.157)
2 06		A	4,00	(.157)
2 21*		A	0,80	(.031)
2 23*		A	1,60	(.063)

Note:

VF 4 are screwed into KS-VF 4 using special tools, see page 170/171.

Recommended Screw-in Torque:
 Min.: 3 Ncm / Max.: 5 Ncm

* Note:

The flat surface on the Plunger Tip is in the same alignment as the flat surface on the rear of the Plunger.

Ordering Example

Series Tip Material Tip Style Tip Diameter (1/100 mm)/width of spade Plating Spring Force (dN)

Test Probe:

VF4 2 02 180 A 15


Receptacle:

KS-VF4

Grid:
 ≥ 5,08 mm
 ≥ 200 Mil


Installation Height: 36,7 mm (1.445)
Recommended Stroke: 5,0 / 9,5 mm (.197 / .374)

Mounting and Functional Dimensions

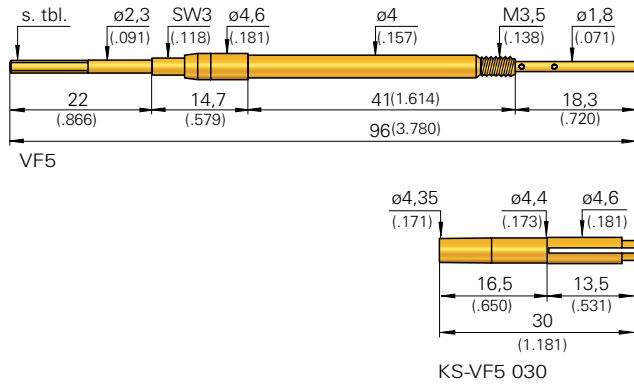

Available Tip Styles

Material	Tip Style	Plating	Further Versions	
			∅	∅ (inch)
3 20		A		
3 20*		A		
3 20		A		
3 20		A		

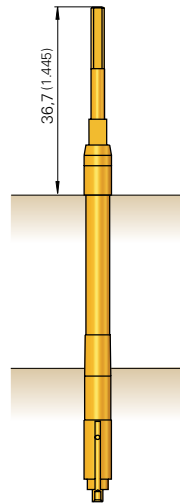

Installation Height
 Installation Height with KS: 36,7 mm (1.445)

Mechanical Data

Spring Force at Work. Stroke	Pre-load	Working Stroke in mm (inch)	Maximum Stroke in mm (inch)
15 N (54oz)	2,7 N (10oz)	9,5 (.374)	10* (.394)/12 (.472)
20 N (72oz)	3,6 N (13oz)	9,5 (.374)	10* (.394)/12 (.472)
34 N (122oz)	10,0 N (36oz)	5,0 (.197)	6,5 (.256)

Materials

Barrel: Brass, gold-plated
Plunger: BeCu, gold-plated
Spring: Steel, gold-plated
Receptacle: Brass, gold-plated

Mounting Hole Size

in CEM 1 and FR 4: ∅ 4,0 resp. 4,4 mm (.1575) resp. (.1732)

Electrical Data

Current Rating: 10 A
R_i typical: < 30 mΩ

Note:

* Maximum Stroke of VF5-320 150 A 096 with 15 N and 20 N = 10,0 mm (.394)

Note:

VF 5 are screwed into KS-VF5 030 using special tools, see page 170/171.

Recommended Screw-in Torque:
 Min.: 10 Ncm / Max.: 20 Ncm

Note:

To recognize the spring force, the flat areas for the spanner are marked with notches:

- 1 notch 15 N (54oz)
- 2 notches 20 N (72oz)
- 3 notches 34 N (122oz)

Ordering Example

Series	Tip Material	Tip Style	Tip Diameter (1/100 mm)	Plating	Total Length (dN)	Spring Force (N)
VF5	3 = BeCu	20	150	A = Gold	096	20

Test Probe:

VF5 3 20 150 A 096 20

Receptacle:

KS-VF5 030



Tools

By using Torque Tools it is ensured that the recommend screw-in torque is abided by. Not only continuous adjustable Torque Tools are available but also tools with a fixed set torque.

The new 1/4"-Bit Insert System guarantees a high level of flexibility, i.e. all Screw-in Tools can be used with the various Torque Tools.

Naturally the Bit Tools can be used without the Torque Screwing Tool, for e.g. the removal of the Probes in tightly spaced conditions etc.



DW-5 with BIT-GKS-113 M

Tools

BIT / DW / SW

170/171

Insertion and Extraction Tool – see page 118.

Screw-in Tools with a system

Drawings for Screw-in and Bit-Tools see on Page 171.
Drawings for Insertion Tools see on Page 118.

Series	Plunger Tip-Ø	Bit-Tool	Ø A (mm)	Ø B (mm)	C (mm)	T pre-set	Torque Key			Torque		Insertion Tools for Receptacles
							freely adjustable	min.	max.			
GKS-050 M	≤ 1,1 mm	BIT-GKS-050 M-B	1,5	5	30	DW-1	-	-	0,5 Ncm	1 Ncm	SW-KS-080	
GKS-075 M	≤ 1,1 mm	BIT-GKS-075 M-B	2,3	5	30	DW-1	-	-	0,5 Ncm	1 Ncm	SW-KS-075 G	
GKS-075 M	≤ 1,5 mm	BIT-GKS-075 M	2,3	5	30	DW-1	-	-	0,5 Ncm	1 Ncm	SW-KS-075 G	
GKS-087 M	≤ 1,1 mm	BIT-GKS-050 M-B	1,5	5	30	DW-1	-	-	0,5 Ncm	1 Ncm	SW-KS-050 G	
GKS-098 M	≤ 3,1 mm	BIT-GKS-503 M-B	4,8	4,8	-	DW-20	DW-5-40	DW-20-120	10 Ncm	20 Ncm	SW-GKS	
GKS-103 M	≤ 3,1 mm	BIT-GKS-503 M-B	4,8	4,8	-	DW-20	DW-5-40	DW-20-120	10 Ncm	20 Ncm	SW-KS-103	
GKS-103 M	≤ 4,1 mm	BIT-GKS-503 M	5,5	6	27	DW-20	DW-5-40	DW-20-120	10 Ncm	20 Ncm	SW-KS-103	
GKS-112 MD	≤ 2,0 mm	BIT-GKS-112 M-B-FP	2,8	5	30	DW-5	DW-5-40	-	3 Ncm	5 Ncm	SW-KS-112	
GKS-112 M	≤ 2,0 mm	BIT-GKS-112 M-B	2,7	5	30	DW-5	DW-5-40	-	3 Ncm	5 Ncm	SW-KS-112	
GKS-112 M	≤ 3,5 mm	BIT-GKS-112 M	4,3	6	27	DW-5	DW-5-40	-	3 Ncm	5 Ncm	SW-KS-112	
GKS-113 M	≤ 3,0 mm	BIT-GKS-113 M-B	4,8	4,8	-	DW-20	DW-5-40	DW-20-120	10 Ncm	20 Ncm	SW-KS-113	
GKS-113 M	≤ 4,2 mm	BIT-GKS-113 M	5,3	6	27	DW-20	DW-5-40	DW-20-120	10 Ncm	20 Ncm	SW-KS-113	
GKS-204 M	≤ 2,0 mm	BIT-GKS-112 M-B	2,7	5	30	DW-5	DW-5-40	-	3 Ncm	5 Ncm	SW-KS-112	
GKS-212 M	≤ 2,0 mm	BIT-GKS-212 M	2,7	6	26	DW-5	DW-5-40	-	3 Ncm	5 Ncm	SW-GKS	
GKS-313 M	≤ 3,0 mm	BIT-GKS-113 M-B	4,8	4,8	-	DW-20	DW-5-40	DW-20-120	10 Ncm	20 Ncm	SW-KS-113	
GKS-427 M	≤ 2,0 mm	BIT-GKS-112 M-B	2,7	5	30	DW-5	DW-5-40	-	3 Ncm	5 Ncm	SW-KS-112	
GKS-500 M	> 0 mm	BIT-GKS-500 M	3,5	6	27	DW-20	DW-5-40	DW-20-120	10 Ncm	20 Ncm	SW-GKS	
GKS-503 M	≤ 3,1 mm	BIT-GKS-503 M-B	4,8	4,8	-	DW-20	DW-5-40	DW-20-120	10 Ncm	20 Ncm	SW-KS-103	
GKS-503 M	≤ 4,1 mm	BIT-GKS-503 M	5,5	6	27	DW-20	DW-5-40	DW-20-120	10 Ncm	20 Ncm	SW-KS-103	
GKS-746 M	≤ 2,0 mm	BIT-GKS-112 M-B	2,7	5	30	DW-5	DW-5-40	-	3 Ncm	5 Ncm	SW-KS-112	
GKS-747 M	≤ 4,0 mm	BIT-GKS-747 M	5	6	28	DW-20	DW-5-40	DW-20-120	10 Ncm	20 Ncm	SW-KS-112	
GKS-761 M	≤ 2,0 mm	BIT-GKS-112 M-B	2,7	5	30	DW-5	DW-5-40	-	3 Ncm	5 Ncm	SW-GKS	
GKS-803 M	≤ 3,1 mm	BIT-GKS-503 M-B	4,8	4,8	-	DW-20	DW-5-40	DW-20-120	10 Ncm	20 Ncm	SW-KS-103	
GKS-803 M	≤ 4,1 mm	BIT-GKS-503 M	5,5	6	27	DW-20	DW-5-40	DW-20-120	10 Ncm	20 Ncm	SW-KS-103	
GKS-854 M	≤ 4,0 mm	BIT-HSS-150 M	5,5	6	28	DW-20	DW-5-40	DW-20-120	10 Ncm	20 Ncm	SW-GKS	
GKS-899 M	≤ 1,5 mm	BIT-GKS-899 M-B	2,4	5	30	DW-3	-	-	2 Ncm	3 Ncm	SW-KS-100	
GKS-899 M	≤ 2,0 mm	BIT-GKS-899 M	2,8	6	27	DW-3	-	-	2 Ncm	3 Ncm	SW-KS-100	
GKS-913 M	≤ 3,0 mm	BIT-GKS-913 M-B	4,8	4,8	-	DW-5	DW-5-40	-	5 Ncm	10 Ncm	SW-KS-113	
GKS-913 M	≤ 3,6 mm	BIT-GKS-913 M	5,3	6	27	DW-5	DW-5-40	-	5 Ncm	10 Ncm	SW-KS-113	
GKS-967 M	≤ 1,3 mm	* BIT-GKS-967 M-B-K	5,3	5,3	30	DW-5	DW-5-40	-	3 Ncm	5 Ncm	SW-GKS	
HSS-118 M	≤ 2,0 mm	BIT-GKS-112 M-B	2,7	5	30	DW-5	DW-5-40	-	3 Ncm	5 Ncm	SW-KS-112	
HSS-118 M	≤ 3,5 mm	BIT-GKS-112 M	4,3	6	27	DW-5	DW-5-40	-	3 Ncm	5 Ncm	SW-KS-112	
HSS-120 M	≤ 3,0 mm	BIT-GKS-113 M-B	4,8	4,8	-	DW-20	DW-5-40	DW-20-120	10 Ncm	20 Ncm	SW-KS-113	
HSS-120 M	≤ 4,2 mm	BIT-GKS-113 M	5,3	6	27	DW-20	DW-5-40	DW-20-120	10 Ncm	20 Ncm	SW-KS-113	
HSS-150 M	≤ 3,0 mm	BIT-HSS-150 M-300	5,5	6	28	DW-20	DW-5-40	DW-20-120	10 Ncm	20 Ncm	SW-GKS	
HSS-150 M	≤ 4,0 mm	BIT-HSS-150 M	5,5	6	28	DW-20	DW-5-40	DW-20-120	10 Ncm	20 Ncm	SW-GKS	
HSS-520 M	≤ 3,0 mm	BIT-GKS-913 M-B	4,8	4,8	-	DW-5	DW-5-40	-	5 Ncm	10 Ncm	SW-KS-113	
HSS-520 M	≤ 3,6 mm	BIT-GKS-913 M	5,3	6	27	DW-5	DW-5-40	-	5 Ncm	10 Ncm	SW-KS-113	
HSS-552 M	≤ 4,0 mm	BIT-HSS-150 M	5,5	6	28	DW-20	DW-5-40	DW-20-120	10 Ncm	20 Ncm	SW-GKS	
HSS-827 M	≤ 2,0 mm	BIT-GKS-112 M-B	2,7	5	30	DW-5	DW-5-40	-	3 Ncm	5 Ncm	SW-KS-112	
PKS-171 M	≤ 1,6 mm	BIT-PKS-171 M-B	2,7	6	26	DW-3	-	-	2 Ncm	3 Ncm	SW-KS-112	
PKS-355 M	≤ 2,5 mm	BIT-SKS-465 M-B	4	4	-	DW-20	DW-5-40	DW-20-120	10 Ncm	20 Ncm	SW-KS-113	
PKS-388 M	≤ 3,7 mm	BIT-PKS-388 M-B	5	6	30	DW-20	DW-5-40	DW-20-120	10 Ncm	20 Ncm	SW-KS-112	
PSK-350 M	≤ 2,5 mm	BIT-SKS-465 M-B	4	4	-	DW-20	DW-5-40	DW-20-120	10 Ncm	20 Ncm	SW-KS-113	
NEW SKS-215 M/MF	≤ 2,0 mm	BIT-GKS-112 M-B	2,7	5	30	DW-5	DW-5-40	-	3 Ncm	5 Ncm	SW-KS-112	
NEW SKS-215 M/MF	≤ 3,5 mm	BIT-GKS-112 M	4,3	6	27	DW-5	DW-5-40	-	3 Ncm	5 Ncm	SW-KS-112	
SKS-435 M	≤ 3,1 mm	BIT-GKS-503 M-B	4,8	4,8	-	DW-20	DW-5-40	DW-20-120	10 Ncm	20 Ncm	SW-KS-103	
SKS-435 M	≤ 4,1 mm	BIT-GKS-503 M	5,5	6	27	DW-20	DW-5-40	DW-20-120	10 Ncm	20 Ncm	SW-KS-103	
SKS-465 MF	≤ 2,5 mm	BIT-SKS-465 M-B	4	-	-	DW-5	DW-5-40	-	3 Ncm	5 Ncm	SW-KS-113	
SKS-465 MF	≤ 3,0 mm	BIT-SKS-465 M	4	6	27	DW-5	DW-5-40	-	3 Ncm	5 Ncm	SW-KS-113	
SKS-465 SF	> 0 mm	BIT-SKS-465 S	3	6	28	DW-5	DW-5-40	-	3 Ncm	5 Ncm	SW-KS-113	

* L_{total} = 47 mm

Screw-in Tools with a system




Series	Plunger Tip-Ø	Bit Tool	Ø A (mm)	Ø B (mm)	C (mm)	Torque Key			Torque		Insertion Tools for Receptacles
						pre-set	freely adjustable		min.	max.	
T-112 M	≤ 2,0 mm	BIT-GKS-112 M-B	2,7	5	30	DW-5	DW-5-40	-	3 Ncm	5 Ncm	SW-KS-112
T-112 M	≤ 3,5 mm	BIT-GKS-112 M	4,3	6	27	DW-5	DW-5-40	-	3 Ncm	5 Ncm	SW-KS-112
T-113 M	≤ 3,0 mm	BIT-GKS-113 M-B	4,8	4,8	-	DW-20	DW-5-40	DW-20-120	10 Ncm	20 Ncm	SW-KS-113
T-113 M	≤ 4,2 mm	BIT-GKS-113 M	5,3	6	27	DW-20	DW-5-40	DW-20-120	10 Ncm	20 Ncm	SW-KS-113
T-113 M	≤ 5,0 mm	BIT-T-113 M	6	-	-	DW-20	DW-5-40	DW-20-120	10 Ncm	20 Ncm	SW-KS-113
NEW T-888 M	3,0 - 4,0 mm	BIT-T-888 M-3	3,5	6	23	DW-20	DW-5-40	DW-20-120	10 Ncm	20 Ncm	SW-KS-113
NEW T-888 M	4,0 - 4,7 mm	BIT-T-888 M	5	6	23	DW-20	DW-5-40	DW-20-120	10 Ncm	20 Ncm	SW-KS-113
NEW T-888 M	5,0 mm	BIT-T-912 M	2,6	6	23	DW-20	DW-5-40	DW-20-120	10 Ncm	20 Ncm	SW-KS-113
T-899 M	≤ 1,5 mm	BIT-GKS-899 M-B	2,4	5	30	DW-3	-	-	2 Ncm	3 Ncm	SW-KS-100
NEW T-912 M	2,0 - 3,5 mm	BIT-T-912 M	2,6	6	23	DW-5	DW-5-40	-	3 Ncm	5 Ncm	SW-KS-112
VF-3	≤ 2,1 mm	BIT-VF3 M-B	3,3	5	29	DW-5	DW-5-40	-	3 Ncm	5 Ncm	SW-GKS
VF-3	≤ 3,0 mm	BIT-VF3 M	4	6	27	DW-5	DW-5-40	-	3 Ncm	5 Ncm	SW-GKS
VF-4	≤ 2,5 mm	BIT-SKS-465 M-B	4	4	-	-	DW-5-40	-	5 Ncm	10 Ncm	SW-KS-103
VF-4	≤ 3,0 mm	BIT-SKS-465 M	4	6	27	-	DW-5-40	-	5 Ncm	10 Ncm	SW-KS-103
VF-5	≤ 3,0 mm	BIT-GKS-113 M	5,3	6	27	DW-20	DW-5-40	DW-20-120	5 Ncm	20 Ncm	on Request



DW-5 with BIT-GKS-113 M



BIT-GKS-113 M with Test Probe GKS 113 M

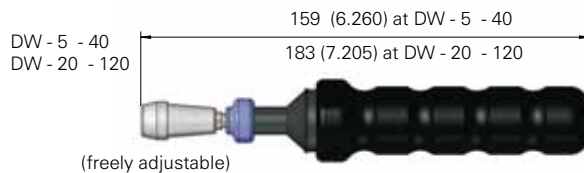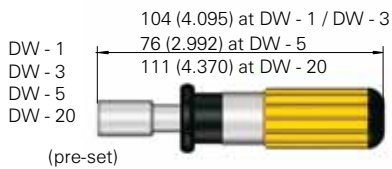

Ordering Example

Bit-tool for screw-in Probe:

BIT - GKS - 112 M - B

Torque keys pre-set:

DW - 1 DW - 3 DW - 5 DW - 20

Torque keys freely adjustable:

DW - 5 - 40 DW - 20 - 120

Send copied fax-form to: +49 7531 8105-65

To:
INGUN Prüfmittelbau GmbH
 Probe Design Dept.
 Max-Stromeyer-Straße 162
 78467 Konstanz
 Germany

From:

 COMPANY

 DEPT.

 NAME

 STREET

 POSTE CODE / COUNTRY

 FAX

 TEL.


 E-MAIL

Your Requirement – Our Solution!


Features

Short description / Operation Example:

Standard Test Probe

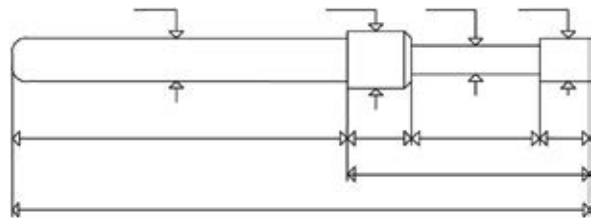

Srew-in Step Probe



Tip:

Electrical data:

Tip-style: _____	I_{max}	A
Material: _____	U_{max}	V
Plating: _____	R_{max}	Ω

Grid:	Stroke mm (inch)	Force (N)
Pre-Load	/	
Working Stroke		
Max. Stroke		
Required life-expectancy:		

Environmental Conditions and Application Range:

Temperature range from: _____ °C to: _____ °C

- | | | |
|--|--|--------------------------------|
| <input type="checkbox"/> Rough Operation/Usage | <input type="checkbox"/> Contamination | <input type="checkbox"/> Other |
| <input type="checkbox"/> High Humidity | <input type="checkbox"/> Vibration | |
| <input type="checkbox"/> Radial Force | <input type="checkbox"/> Snap Effect | |

We are also interested in:

- | | |
|--|------------------------------------|
| <input type="checkbox"/> Test Fixtures | <input type="checkbox"/> RF-Probes |
|--|------------------------------------|

INGUN Test Probes according to Series

Series	Page	Series	Page	Series	Page
Fixtures Accessories <small>NEW</small>	114–116	GKS-364	62	HSS-520/520M	106
BIT/DW/SW/Tools	170/171	GKS-365	63	HSS-552 M	146
DKS-050	74	GKS-366	63	HSS-827 M	129
DKS-075	74	GKS-412	54	KS-040 WL	38
DKS-100	74	GKS-414	113	KS-075 WL	38
E-050 <small>NEW</small>	20	GKS-416	113	KS-100 WL	38
E-075 <small>NEW</small>	20	GKS-422	53	KS-112	50
E-100 <small>NEW</small>	21	GKS-427 M	129	KS-550 WL	38
E-422 <small>NEW</small>	21	GKS-500 M	139	Contact Terminal KT <small>NEW</small>	111
GKS-001	33	GKS-502	57	PKS Accessories	94/95
GKS-002	34	GKS-503/503M	61	PKS-171	87
GKS-003	35	GKS-504	113	PKS-200	88
GKS-004	36	GKS-550	38	PKS-220	89
GKS-005	37	GKS-710	157	PKS-299	90
GKS-015	25	GKS-713	76	PKS-300	91
GKS-035	30	GKS-714	158	PKS-355 M	84
GKS-038	42	GKS-725	75	PKS-388 M	85
GKS-040	24	GKS-746 M	160	PKS-399	92
GKS-041	42	GKS-747 M	161	PKS-420	93
GKS-050	25	GKS-761 M	69	PSK-350 M	86
GKS-050 Bead Probe <small>NEW</small>	40	GKS-803 M	156	SKS-100	78
GKS-050 M	126	GKS-854/854 M	138	SKS-215	79
GKS-061	42	GKS-899 M	130	SKS-215 M/MF <small>NEW</small>	148
GKS-064	66	GKS-912	52	SKS-415	80
GKS-069	45	GKS-913	59	SKS-419	82
GKS-075	26/27	GKS-913 M	142	SKS-425	81
GKS-075 Bead Probe <small>NEW</small>	40	GKS-925 TJA (TestJet)	112	SKS-429	82
GKS-075 M	128	GKS-938	110	SKS-435 M	151
GKS-079	46	GKS-941	66	SKS-465 MF	149
GKS-080	43	GKS-945	110	SKS-465 SF	150
GKS-081	44	GKS-946	110	SW/ZW/AW/Tools <small>NEW</small>	118
GKS-087 M	127	GKS-961	69	T-112 M	133/134
GKS-098	158	GKS-967/967M	68	T-113 M <small>NEW</small>	136/137
GKS-098 M	159	GKS-970	69	T-888 M <small>NEW</small>	136/137
GKS-100 <small>NEW</small>	28/29	GKS-986	66	T-899 M	131
GKS-100 Bead Probe <small>NEW</small>	40	HF/Digital <small>NEW</small>	152/154	T-912 M <small>NEW</small>	133/134
GKS-100 306 229 ...	110	HFS-010	100	VF 25	164
GKS-100 307 150 ...	110	HFS-110	101	VF 3	165
GKS-100 357 150 ...	110	HFS-PCB <small>NEW</small>	98	VF 4	166
GKS-101	32	HFS-Connectors <small>NEW</small>	99	VF 5	167
GKS-102	56	HMS-075	112	VS-112	51
GKS-102	113	HMS-100	112	VS-112 M	132
GKS-103/103M	60	HMS-422	112		
GKS-112	51	HSS-118	104		
GKS-112 MD	72	HSS-118 M <small>NEW</small>	144		
GKS-112 M	132	HSS-120	105		
GKS-113	58	HSS-120 M	145		
GKS-113 M	135	HSS-150	107		
GKS-135	31	HSS-150 M	146		
GKS-135 Bead Probe <small>NEW</small>	40	HSS-2259	108		
GKS-181	47	HSS-2513	108		
GKS-204/204 M	55	HSS-2516	108		
GKS-212 M	140	HSS-2526	108		
GKS-313 M	141	HSS-2532	108		

Visit us on the internet under:
www.ingun.com

Agencies

Europe

Austria
 Benelux
 Bosnia-Herzegovina
 Croatia
 Czech Republic
 Denmark
 Estonia
 Finland
 France
 Germany
 Hungary
 Italy
 Norway
 Poland
 Portugal
 Romania
 Serbia
 Slovenia
 Slovak Republic
 Spain
 Sweden
 Switzerland
 Turkey
 United Kingdom

Asia

China
 Hong Kong
 India
 Japan
 Korea
 Malaysia
 Taiwan
 Thailand
 Vietnam

Africa

South Africa
 Tunisia

Australia

Australia
 New Zealand

America

Argentina
 Brazil
 Canada
 Mexico
 USA

The addresses of the International Agencies
 can be found under www.ingun.com



ingun Prüfmittelbau GmbH

Max-Stromeyer-Straße 162

78467 Konstanz

Germany

Tel. +49 7531 8105-0

Fax +49 7531 8105-65

info@ingun.com

www.ingun.com