


fan kit 0295, 12V / 24V DC

for oil/air blast coolers ASA 0075/0115/0257/0367, ECO 07/11, TT 11

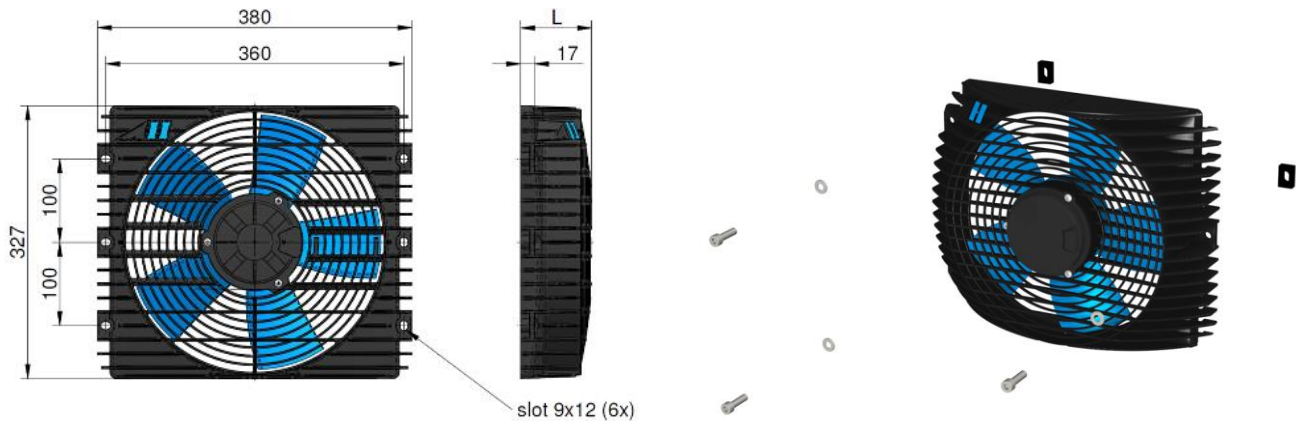


Technical Data ^{*)}

order number	description	current ^{*)} [A]	motor power [kW]	protection level	L [mm]	weight [kg]
ILLELE0295A1	fan kit 0295, 12V DC	15,4	0,20	IP 68	90	2,95
ILLELE0295A2	fan kit 0295, 24V DC	7,7	0,20	IP 68	90	2,95
ILLELE0295A5	fan kit 0295, HP 12V DC	20,8	0,27	IP 68	110	3,10
ILLELE0295A6	fan kit 0295, HP 24V DC	10,4	0,27	IP 68	110	3,10

^{*)} given data are running currents, for start up 3x higher current has to be calculated!

Performance Data

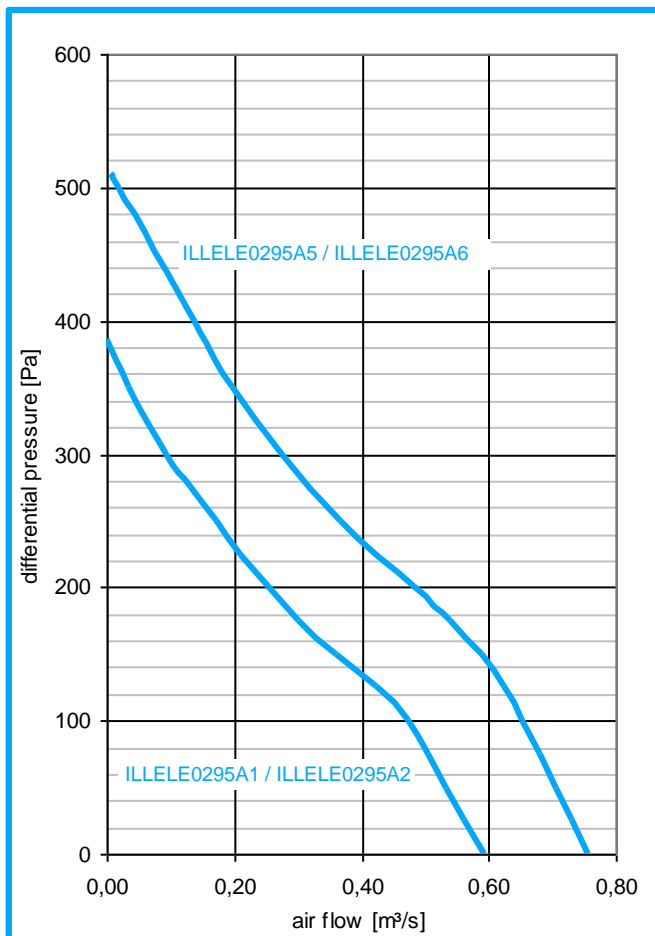

ambient conditions

ambient temperature range -20°C to +80°C

storage temperature range -40°C to +120°C

Important: Assure sufficient air circulation!

supply

12V DC ± 10% 24V DC ± 10%

maximum allowed ripple 1%

Check for right polarity! Inverse polarity may damage the fan!

recommended fuse (slow acting)

ILLELE0295A1 20 A

ILLELE0295A2 10 A

ILLELE0295A5 25 A

ILLELE0295A6 15 A

housing

material polyamide

accessories

temperature control ILLZTC12K, ILLZTC24K

content of fan kit

1x fan unit, 3x screws, 3x screw nuts, 6x washer, 1x counter connector, 3x distance blocks

^{*)} all data refer to tests with 13V and 26V DC, respectively

Please contact us for further options and assistance.